


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2021-08-27	Allen Pan	Rev.03 To Rev.A

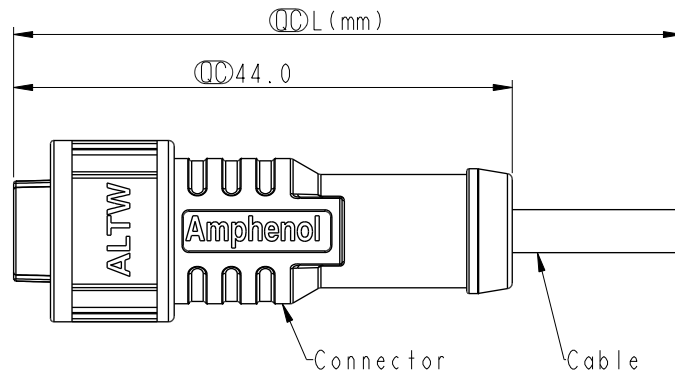

AD-XXBFFM-QL8PXX



XX: No. Of Pin

XX: 01~15Meters
 01: 01Meter
 02: 02Meters
 ...
 15: 15Meters

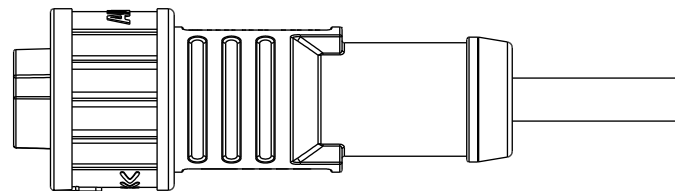

Note:

- * RoHS Compliant
- * \varnothing Important Dimension
- * Waterproof Rate: IPX8, Mated 1m/24h
- * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper Alloy, Gold Plated
 - O-Ring: Rubber, Black
 - Nut: Thermoplastic, Black
 - Outer Mold: Thermoplastic, Black
- * Cable: IEC61156-12, 26#*1P+AL/MY+B, OD=3.8mm, PUR Jacket, Green
- * Cable Length Tolerance:
 - 1M < L ≤ 3M: +50/-0 mm
 - 3M < L ≤ 5M: +100/-0 mm
 - 5M < L ≤ 10M: ±100 mm
 - 10M < L ≤ 15M: ±200 mm

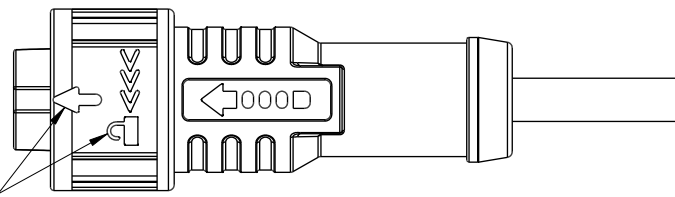

2Pin

3 White 白
 1 Blue 藍

Pin# Wire

Pin Assignments
 Front View

UNIT:mm

TOLERANCE

±0.5mm

TITLE XLOK, A-5A, CABLE W/O SR F CONN., F PIN, MOLDING			
SCALE 3:2	SIZE A4	SHEET 1 OF 1	
REV. A	WC-REV. A.1	\varnothing : Inspection item	

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO.	DRAWN BY Allen Pan	DATE 2021-08-27
DWG NO. AD-XXBFFM-QL8PXX	CHECKED BY Sam Ho	DATE 2021-08-27
CUSTOMER ALTW	APPROVED BY Fred Lee	DATE 2021-08-27