


## **PRODUCT D**

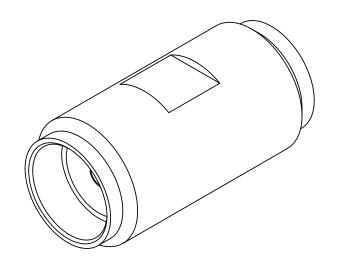

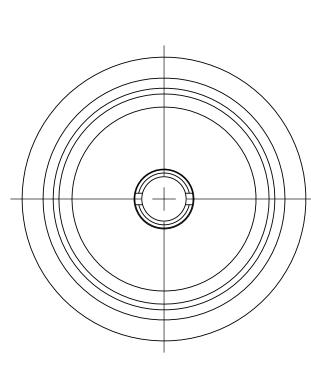

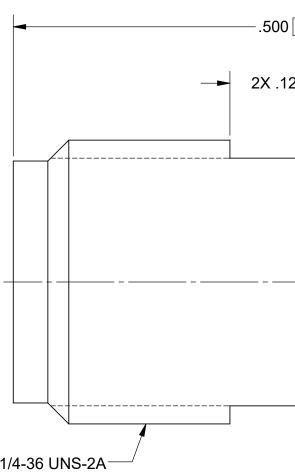

## **MATERIAL:**

BODY:	STAINLESS STEEL PER AMS-5640,
	ALLOY UNS S30300, TYPE 1

BERYLLIUM COPPER PER ASTM B196, ALLOY No. UNS C17300, TD04 CONTACT:

PTFE PER ASTM D1710, TYPE I, GRADE 1, CLASS B **INSULATOR:** 

## FINISH:

BODY: PASSIVATED PER AMS-2700

GOLD PER ASTM B488, TYPE II, CODE C, CLASS 1.27, OVER NICKEL PER AMS-QQ-N-290, CLASS 1, .00005" MIN. CONTACT:

## **PERFORMANCE**:

IMPEDANCE: FREQ. RANGE: VSWR: 50 OHMS DC TO 18.0 GHz. 1.10+.008\*F(F IN GHz.):1 MAX. DC TO 18.0 GHz.

				REVISION HISTORY	,		
DATA DRAWING	C		REV	DESCRIPTION	DATE	APPROVED	
	G			DCN 41869	11/15	DAL	
			В	DCN 47334	04/18	STW	
Image: Imag		500[12.7	-				
MATERIAL: SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES:	UNLESS OTHER			Ampt		
FINISH: SEE NOTES	FRACTIONAL: ±1/64 ANGULAR: X* ±1°0' X*X' ±15' DECIMAL: .X ±.030 .XX ±.010	1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS] 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORDERS & EDGES 005 PM MAX			2400 Centrepark West Drive, Suite 100 West Palm Beach, FL 33409		
SURFACE AREA: N/A	.XXX ±.005	4) CHAM, IS & LAST INKEADS. 5) SURFACE ROUGHNESS 63.MIL-STD-10. 6) DIA:S ON COMMON CENTERS TO BE CONCENTRIC 5) SURFACE ROUGHNESS TO BE CONCENTRIC					
11/7 (	PER ASME Y14.5M - 1994			C 1 1 / 1 / 1 / 1	VI / VI / I	ED	
PROPRIETARY THE INFORMATION CONTAINED IN THIS DRAWING	PER ASME Y14.5M - 1994 THIRD ANGLE PROJECTION	DRAWN:	DWE 04/16/87	7			
PROPRIETARY	PER ASME Y14.5M - 1994		DWE 04/16/87				