
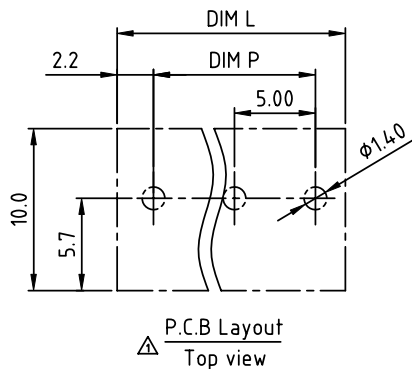
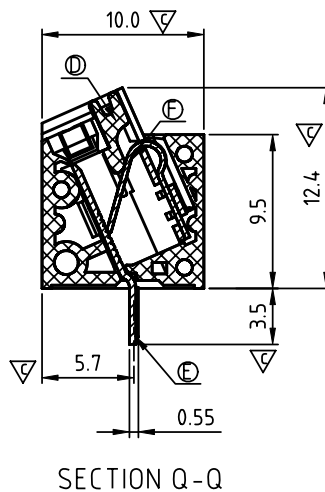


SIGN	DATE	DESCRIPTION	APPROVER
△	08/22'13	Add is cULus // update the drawing	Da cheng

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

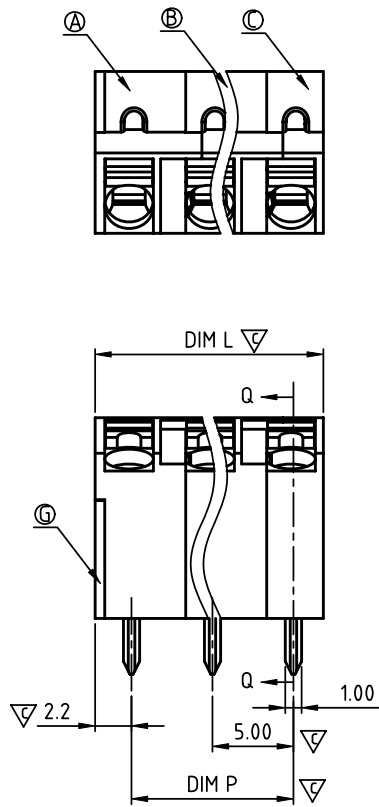

- Material:
- Item ① Terminal with cover of body: Thermoplastic (UL94V-0)
 - Item ② Terminal normal body: Thermoplastic (UL94V-0)
 - Item ③ Terminal side body: Thermoplastic (UL94V-0)
 - △ Item ④ Terminal lever: Thermoplastic (UL94V-0) Orange(RAL2011/P)
 - Item ⑤ Female Contact : Brass. Tin Plated.
 - Item ⑥ Spring clamp : Stainless steel
 - Item ⑦ Terminal cover: Thermoplastic (UL94V-0)

- Electrical: cULus
- Voltage rating: 300 V
 - Current rating: 10A
 - Wire range:
 - Solid wire(AWG): 16-26
 - Stranded wire(AWG): 16-26
 - Wire strip length: 8-9 mm
 - Withstanding Voltage: 1.6 KV
 - Operating temperature: -40°C to +115°C
 - Soldering temperature: 260°C ±5°C/5 Sec
 - △ ● Safety Approval:
 - Critical dimension: ▽

NH xx 7 0 x 0 xxxx G

No. OF POLES
02: 2 POLES
24: 24 POLES

△ Body Color
0 Black (RAL9005)
2 Red (RAL3001/D)
3 Orange(RAL2011/P)
4 Yellow(RAL1018/A)
5 Green(RAL6018/T)
6 Blue (RAL5015/A)
8 Grey(RAL7004/P)
9 White(RAL1102)
C Multiple colors

RoHS compliant (lead<4%)
In copper Alloy

0000: "@ " Logo (Standard)
000A: "ANYTEK" Mark
Any special item by customer request. please contact sales department.

N = Number of poles

$$\text{DimL} = (N-1) \times 5.0 + 4.1$$

$$\text{DimP} = (N-1) \times 5.0$$

POLES	DIM L	DIM P
2p-6p	±0.1	±0.1
7p-12p	±0.2	±0.2
13p-18p	±0.3	±0.3
19p-24p	±0.4	±0.4

<h1>ANYTEK</h1>		<h2>CUSTOMER COPY</h2>	
ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD			
TITLE: NH 5.0mm Series		DWG NO. 8NH0002	
PART NO. NHxx70x0xxxxG		CUST NO.	
APPROVED	CHECKED	DESIGNED	DRAWN
		Da cheng 2013.08.22	Da cheng 2013.08.22
SHEET: 01/01		Tolerance	
		UNIT: mm	X. ±0.50
		SCALE: NONE	X.X ±0.30
		REV.: C	X.XX ±0.10
			X° ±1°