

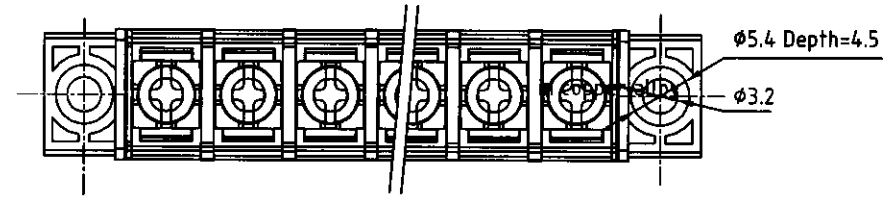


SIGN	DATE	DESCRIPTION	APPROVER
△	2009.1.7	APPROVAL: cULus	Kind
△	2009.7.3	COVER TRANSPARENT PVC TO PC	Aaron
△	11/20'12	Change the screw plating specification	Jacky
△	11/20'12	Change the electrical specification	Jacky

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

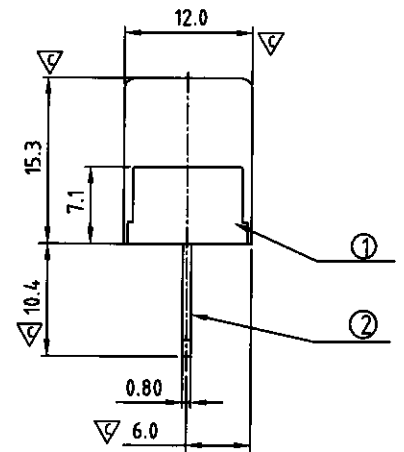

MATERIALS ELECTRICAL
 RATED VOLTAGE & CURRENT: 300 V, 15 A
 WITHSTAND VOLTAGE: AC 2000 V/Min
 INSULATION RESISTANCE: 1000 MΩ OR MORE AT DC 500 V
 △ OPERATING TEMPERATURE RANGE: -40 °C ~ +115 °C
 SCREW TORQUE VALUE: 5. 2 Lb-in.
 WIRE RANGE: 14 ~ 22 AWG
 1) MOLDED PARTS: THERMOPLASTIC, UL 94 V-0 BLACK
 2) TERMINAL: BRASS, 0.8t, Tin PLATED
 △ 3) TERMINAL SCREWS: STEEL, M3
 △ 4) COVER: TRANSPARENT, PC
 △ APPROVAL: cULus
 Critical dimension: ▽
 PART No.:

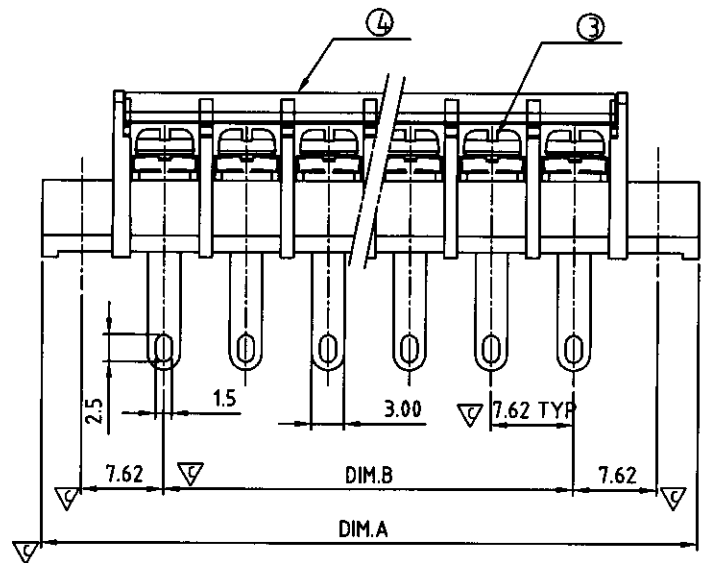

YK 305xx 1 x x 00G

NO. OF POLES
 02: 2 POLES
 03: 3 POLES
 04: 4 POLES

18: 18 POLES

G:RoHS compliant(lead=4%)
 in copper alloy

MARK

0: "@ " MAK
 1: "ANY" MAK

TERMINAL & SCREW PLATED

0: TERMINAL & SCREW: G/F
 △ 1: TERMINAL: G/F, SCREW: Zinc
 2: TERMINAL: Sn, SCREW: G/F
 △ 3: TERMINAL: Sn, SCREW: Zinc



DIM	TOL			
	2P-4P	5P-10P	11P-16P	17P-18P
Dim A (N+2)×7.62	±0.20	±0.30	±0.40	±0.50
Dim B (N-1)×7.62	±0.20	±0.30	±0.40	±0.50

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	YK-305 With Flange & cover Series				DWG NO.	8YK0002-305	
PART NO.	YK305xx1xx00G				CUST NO.		
APPROVED	CHECKED	DESIGNED	DRAWN	Tolerance			
 2012.11.20	 2012.11.20	Jacky	Jacky	 SHEET: 01/01	UNIT: mm	X.	±0.50
					SCALE: NONE	X.X	±0.30
					REV.: C	X.XX	±0.10
					X*		±1°