

SURFACE MOUNT SILICON SCHOTTKY DIODES



 V_{F}

 V_F

 V_{F}

CJ

t_{rr}

I_F=1.0mA

I_F=50mA

I_F=100mA

V_R=1.0V, f=1.0MHz

 $I_F = I_R = 10 \text{mA}, I_{rr} = 1.0 \text{mA}, R_L = 100 \Omega$



305

535

670

330

600

750

10

5.0

www.centralsemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CMUSH2-4 series devices are silicon Schottky diodes, epoxy molded in a SOT-523 surface mount package, designed for fast switching applications requiring a low forward voltage drop.

CMUSH2-40	SINGLE A: DUAL, COMMON ANODE C: DUAL, COMMON CATHODE S: DUAL, IN SERIES	MARKING MARKING	CODE: C42 CODE: C4A CODE: C4C CODE: C4S	;		
MAXIMUM R	ATINGS: (T _A =25°C)	SYMBOL			UNITS	
Peak Repetiti	ve Reverse Voltage	V _{RRM}	4	0	V	
Continuous F	orward Current	١ _F	20	00	mA	
Peak Repetiti	ve Forward Current	IFRM	30	00	mA	
Peak Forward	I Surge Current, tp=10ms	IFSM	60	00	mA	
Power Dissipa	ation	PD	25	50	mW	
Operating and Storage Junction Temperature		TJ, T _{stg}	-65 to +150		°C	
Thermal Resistance		Θ_{JA}	500		°C/W	
		DE: (T _A =25°C unless otherwise noted)				
symbol I _R	TEST CONDITIONS VR ^{=25V}	MIN	TYP 80	MAX 500	UNITS nA	
IR	V _R =25V, T _A =100°C		25	100	μΑ	
BVR	Ι _R =100μΑ	40	55		V	
V _F	Ι _Ε =100μΑ		240	260	mV	
VF	Ι _F =500μΑ		285	310	mV	

R3 (10-December 2015)

mV

mV

mV


pF

ns




CMUSH2-4 CMUSH2-4A CMUSH2-4C CMUSH2-4S

SURFACE MOUNT SILICON SCHOTTKY DIODES



DIMENSIONS							
	INCHES		MILLIMETERS				
SYMBOL	MIN	MAX	MIN	MAX			
А	0.023	0.031	0.58	0.78			
В	0.002	800.0	0.04	0.20			
С	0.013	0.021	0.34	0.54			
D	0.059	0.067	1.50	1.70			
Е	0.059	0.067	1.50	1.70			
F	0.035	0.043	0.90	1.10			
G	0.020		0.50				
Н	0.031	0.039	0.78	0.98			
J	0.010	0.014	0.25	0.35			
SOT-523 (REV: R2)							

PIN CONFIGURATIONS

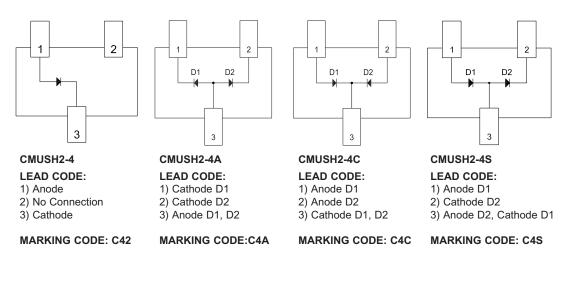

SOT-523 CASE - MECHANICAL OUTLINE


www.centralsemi.com

R3 (10-December 2015)





SURFACE MOUNT SILICON SCHOTTKY DIODES

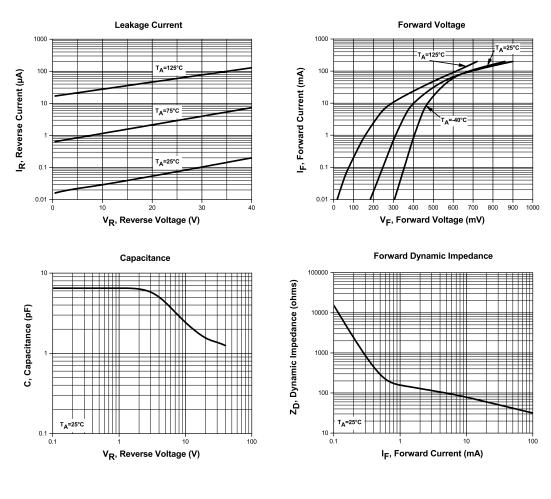

TYPICAL ELECTRICAL CHARACTERISTICS


www.centralsemi.com

R3 (10-December 2015)





SURFACE MOUNT SILICON SCHOTTKY DIODES

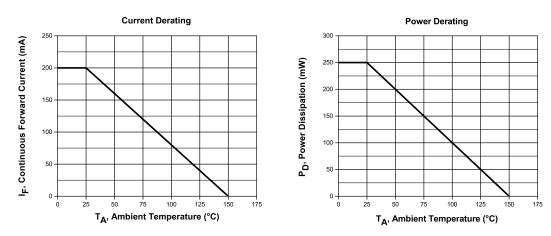

TYPICAL ELECTRICAL CHARACTERISTICS

www.centralsemi.com

R3 (10-December 2015)

OUTSTANDING SUPPORT AND SUPERIOR SERVICES

PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free guick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- · Environmental regulation compliance
- Customer specific screening
- · Up-screening capabilities

· Custom product packing

Custom bar coding for shipments

- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- · Application and design sample kits
- · Custom product and package development

REQUESTING PRODUCT PLATING

- If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when 1. ordering (example: 2N2222A TIN/LEAD).
- 2. If requesting Lead (Pb) Free plated devices, add the suffix " PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp. 145 Adams Avenue Hauppauge, NY 11788 USA Main Tel: (631) 435-1110 Main Fax: (631) 435-1824 Support Team Fax: (631) 435-3388 www.centralsemi.com

Worldwide Field Representatives: www.centralsemi.com/wwreps

Worldwide Distributors: www.centralsemi.com/wwdistributors

For the latest version of Central Semiconductor's LIMITATIONS AND DAMAGES DISCLAIMER. which is part of Central's Standard Terms and Conditions of sale, visit: www.centralsemi.com/terms





Product End of Life Notification

PDN ID:	PDN01233
Notification Date:	6/01/22
Last Buy Date:	12/01/22
Last Shipment Date	6/01/23

Summary: The CMUSH2-4 series Schottky diodes are discontinued and now classified as Life (EOL).

Although Central Semiconductor Corp. makes every effort to continue to produce devices that have been proclaimed EOL (End of Life) by other manufacturers, it is an accepted industry practice to discontinue certain devices when customer demand falls below a minimum level of sustainability. Accordingly, the following product(s) have been transitioned to End of Life status as part of Central's ongoing Product Portfolio Management. Any replacement products are noted below. The effective date for placing last purchase orders will be six (6) months from the date of this notice and twelve (12) months from the notice date for final shipments, and minimum order quantities may apply. The last purchase and shipment dates may be extended if inventory is available.

* All Plating types (PBFREE,TIN/LEAD) for each item listed are included in this notice.

Central Part Number	Suggested Replacement
CMUSH2-4 BK	N/A
CMUSH2-4 TR	N/A
CMUSH2-4A BK	N/A
CMUSH2-4A TR	N/A
CMUSH2-4C BK	N/A
CMUSH2-4C TR	N/A
CMUSH2-4L BK	N/A
CMUSH2-4L TR	N/A
CMUSH2-4S BK	N/A
CMUSH2-4S TR	N/A

Central would be happy to assist you by providing additional information or technical data to help locate an alternate source if we have no replacement available. If you would like assistance, please visit https://my.centralsemi.com/submit-inquiry?type=ER to submit an online inquiry.

DISCLAIMER: This End of Life (EOL) notification is in accordance with JEDEC standard JESD48 - Product Discontinuance. Central Semiconductor Corp. will make every effort to offer life-time buy (LTB) opportunities and/or offer replacement devices to existing customers for discontinued devices, however, one or both may not be possible for all devices. Please contact your local Central Semiconductor sales representative for LTB opportunities/additional information.