


**Notes:**

1. Only RoHS Compliant Processes and Materials used for this assembly.
2. Marking to Contain "ConductRF", Part No. & WK/YR Date Code, Black Text.
3. 100% Sweep Test to 18GHz w. factory stored Hi-Point data.

ConductRF(Wk/Yr)  
FMA28-S1S3-XXX

**Marker Example**

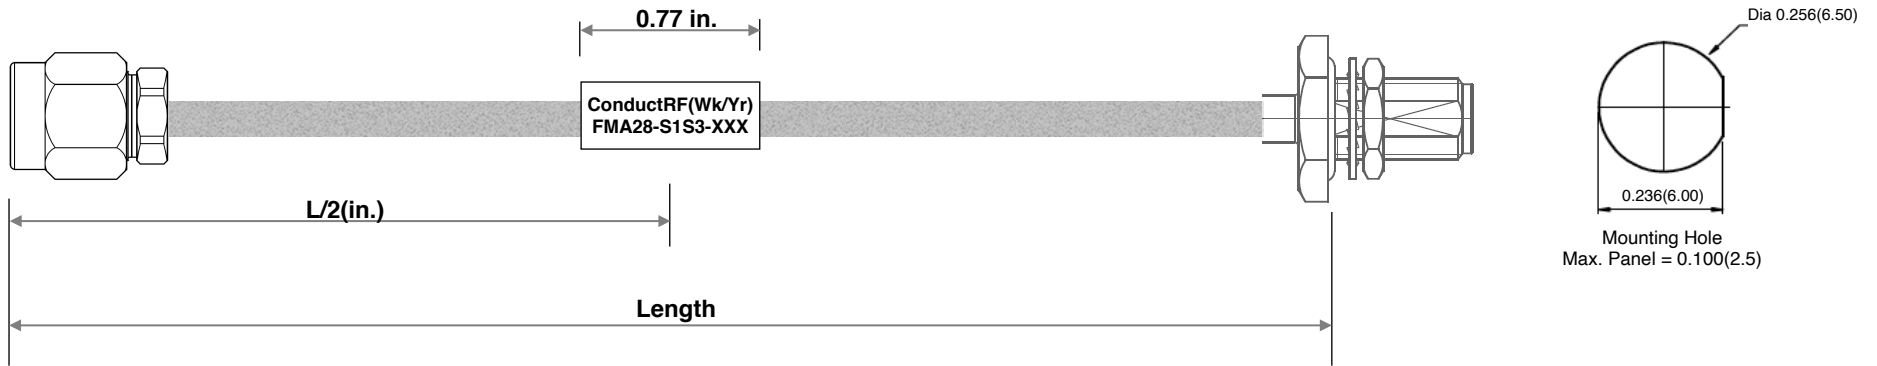


Length	XXX	Insertion Loss(dB) Typ.		
		6GHz	12GHz	18GHz
6"	S06	0.51	0.74	0.92
8"	S08	0.62	0.90	1.12
12"	S12	0.84	1.22	1.52
16"	S16	1.06	1.54	1.92
18"	S18	1.17	1.70	2.13
24"	S24	1.50	2.18	2.73
36"	S36	2.16	3.15	3.94
48"	S48	2.82	4.11	5.15
60"	S60	3.48	5.08	6.36
VSWR(Max)		1.25:1		1.35:1

**Part No. Configurator - XXX**

FXX = Length in Feet (eg F03=3ft)  
SXX = Length in Inches (eg S18=18")  
XMX = Length in Meters (eg 2M5=2.5m)  
CXX = Length in CM (eg C50=50cm)

4	Label	SM3-23 1/4" 3:1	White
3	Hand Form	A28CF	Tinned
2	SMA Bulkhead Jack	PSF31A-A28G01	Gold
1	SMA Straight Male	PSM11B-A28G01	Pass. SS
ITEM	DESCRIPTION	MATERIALS	FINISH

REV.	DESCRIPTION	ECN	DRAWN	DATE	Customer DWG	Title: SMA Male to Female BKHD 0.086 Hand Form Cable	Range: FMA	Sheet 1 of 1	
1	Pre-Release		DG	09/23/20	Remarks: 035/035/5	Originated: 09/23/20	Conduct RF sales@ConductRF.com Tel: +1 978 374 684	Dwg Ref: FMA28-S1S3	
					Length Tolerances: ≤24" = ±0.25" >24" = ± 1%	Checked: JW	Approved: PL	Rev: 1	Part No: FMA28-S1S3-XXX

REVISION HISTORY