


Unit: mm

RoHS Compliant

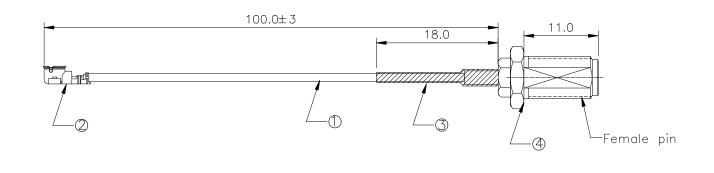

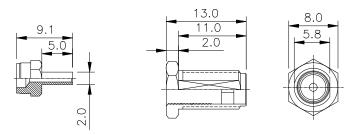

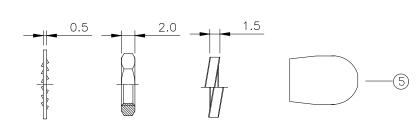

LOCK WASHER HEX NUT SPRING WASHER RED HAT

Note: parts in bulk, 100SET/bag

ELECTRICAR CHARACTERISTICS REQUIREMENTS:

1.Product must be 100% conductionr, open circuit short circuit test.

2.Conductive resistance: 20Ω

3.Rated voltage: AC 60V

4.Withstand voltage: AC 200V 5.Insulation resistance:500m Ω

6.characteristic impedance: 50Ω

7.Adopt environmental protection process and meet ROHS requirements

8. Tensile test: 1.5kg~

9. The general tolerance shall prevail if no tolerance is noted

cess and

| d - | 5 | COVER | _ | RED HAT PACKING SMA | 1 | _ | |
|-----|------------------------|--------------------|--------------------------|--|---|-----|--|
| | 4 | SMA FEMALE | _ | 11*1.78-ZYK-OPENING WELDING GOLD PLATING | 1 | _ | |
| | 3 | HEAT SHRINK SLEEVE | _ | 2.0*18MM BLACK HEAT SHEINK SLEEVE | 1 | _ | |
| | 2 | IPEX-1.37 CONN | _ | IPEX-1.13 BRASS GOLD | 1 | _ | |
| | 1 | COAXIAL CABLE | _ | RG1.37 GRAY-48-TIN-FEP JACKET L=105mm | 1 | 105 | |
| | ITEM | PART No. | T No. VENDOR DESCRIPTION | | | | |
| | MATERIAL SPECIFICATION | | | | | | |

| 3 | | DRAWN BY | CHECKED BY | APPROVED BY | CONFIRMED BY | DESCR | IPTION | 瀚荃股份有限公司 CviLux Corporation | | CUST. CODE |
|-------------|---------------|----------|------------|-------------|------------------|----------|-----------|--------------------------------|-------------|--------------|
| <u>^2</u> | | LuLu | Iron | Iron | Waleed 08/21.20' | RF CABLE | \$ | | | CUC |
| \triangle | | 08/21.20 | 08/21.20' | 08/21.20 | | | | DRAWING No. | CviLux P/N | CUSTOMER P/N |
| SYM NAME D | ATE REVISIONS | | | | | SHEET: 1 | 1 OF 1 | DH50627A | DH-20G50013 | _ |