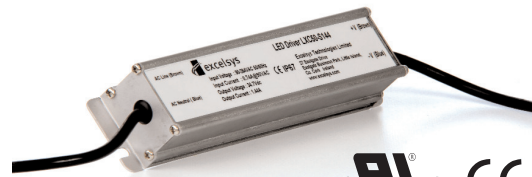


LXD36 series

LED Power Supply

Dimmable LED Power Supplies

LED Power
36W

LED POWER

next generation power source

FEATURES

- High Efficiency (up to 90%)
- Active PFC (Typical 0.95)
- IP67 Waterproof
- OVP, SCP, OLP, OTP
- -35 to +70°C deg operation
- Universal Input 90-305VAC
- UL8750 recognised
- EN61347-1, -2-13 compliant

The LXD36 series of Dimmable LED power supplies from Excelsys Technologies can deliver up to 36W of output power in an extremely compact package size.

The LXD36 series of Dimmable LED power supplies provides up to 1750mA of output current and 103V output voltage solutions for specific LED requirements. With industry leading efficiencies, and an extensive protection feature set, the LXD36 series provides high reliability and high performance in a compact package

The LXD36 series carries the UL and CE mark for safety and is also RoHS compliant.

Model Number	Output Voltage	Output Current	Input Voltage	Efficiency
LXD36-0350SW(2)	52-103V	350mA	90-305VAC	90.0%
LXD36-0450SW(2)	40-80V	450mA	90-305VAC	89.0%
LXD36-0700SW(3)	26-52V	700mA	90-305VAC	88.0%
LXD36-1050SW(4)	18-35V	1050mA	90-305VAC	88.0%
LXD36-1400SW(4)	13-26V	1400mA	90-305VAC	87.0%
LXD36-1750SW(4)	11-21V	1750mA	90-305VAC	86.0%

Input Specifications

Parameter	Conditions/Description	Min	Nom	Max	Units
Input Voltage Range	Universal Input	90		305	VAC
Input Frequency Range		47		63	Hz
Input Current	100VAC in, 36W output			0.6	A
Leakage Current	277VAC Input, 50Hz			0.75	mA
Inrush Current	230VAC in, 25°C, Cold Start			60	A
Power Factor	220VAC, 110VAC	0.95		0.98	

Output Specifications

Parameter	Conditions/Description	Min	Nom	Max	Units
Line Regulation				±1	%
Load Regulation				±3	%
Voltage Range	See individual models				VDC
Output Current	See individual models				mA
Output Current Tolerance				±5	%/Load
Overshoot				10	%
Turn-on Delay	Measured at 220VAC and full load		0.3	0.5	s
Short Circuit Protection	Auto Recovery				
Over Temperature Protection	Hiccup, Auto recovery	95	110	125	°C

General Specifications

Parameter	Conditions/Description	Min	Nom	Max	Units
Isolation Voltage	Input to Output (See Note 1) Input to Chassis	3750 1500			VAC VAC
Efficiency	See individual models		88		%
Safety Agency Approvals	UL8750, EN61347-1, -2-13, UL1310 (See Note 2, 3 & 4)				
No load Power Dissipation	Measured at 230 Vac			6.0	W
MTBF	MIL-HDBK-217F, 110VAC input, 80% load, 25°C		469,000		Hours
Lifetime	110VAC input, 80% load, 45°C		74,000		Hours
Weight			480		g
Operating Temperature		-35		+70	°C
Storage Temperature		-40		+85	°C
Relative Humidity	Non-condensing (operating)	10		100	%RH

- Note 1. Primary to Secondary Isolation test not to be carried out on power supply.
 Note 2. Non - UL1310 Class 2 output in USA and Canada.
 Note 3. UL1310 Class 2 output for USA only.
 Note 4. UL1310 Class 2 outputs for USA and Canada.

Specifications are subject to change without notice





Europe/Asia

Excelsys Technologies Ltd t: +353 21 4354716
 27 Eastgate Drive f: +353 21 4354864
 Eastgate Business Park e: sales@excelsys.com
 Little Island, Cork, Ireland
 IRELAND



North America

Excelsys Technologies t: (972) 771 4544
 519 Interstate 30, #309 f: (972) 421 1805
 Rockwall, TX 75087 e: salesusa@excelsys.com
 USA



Dimming Implementation Diagrams

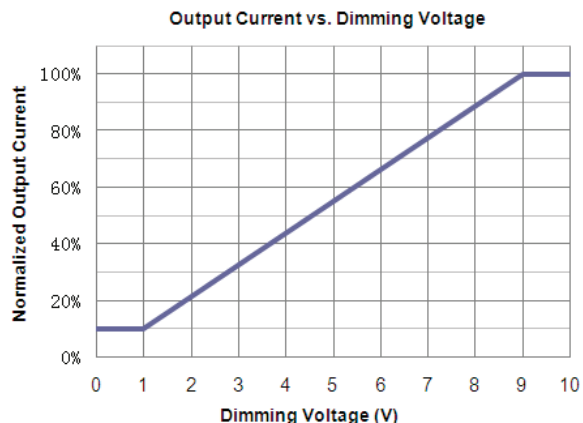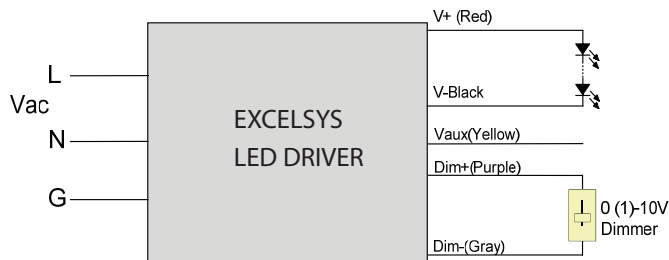

Efficiency vs. Load (350mA Model)

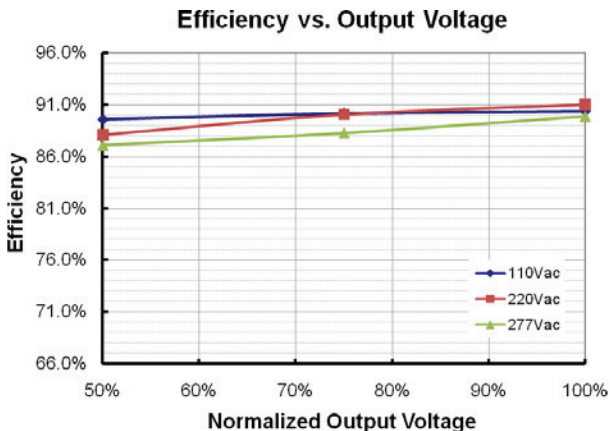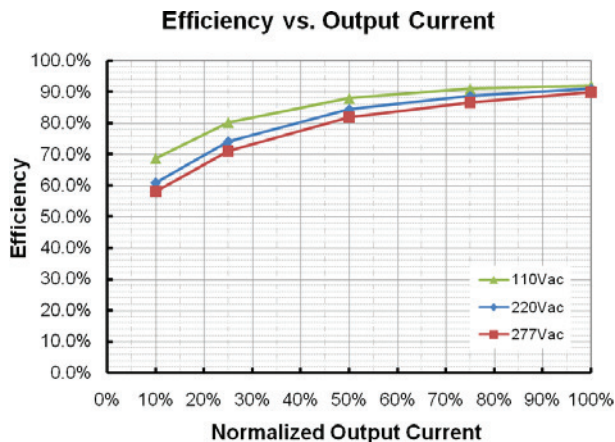

Power Factor Characteristics

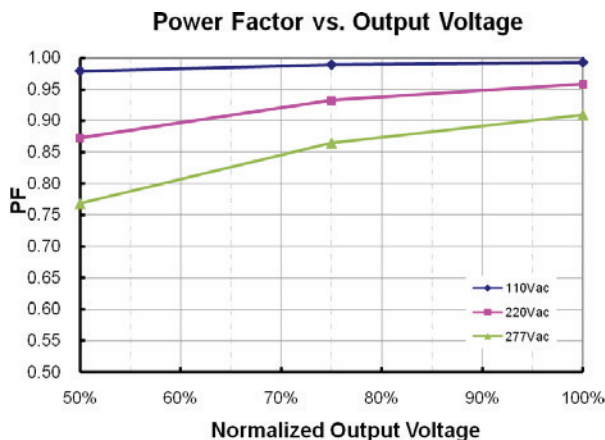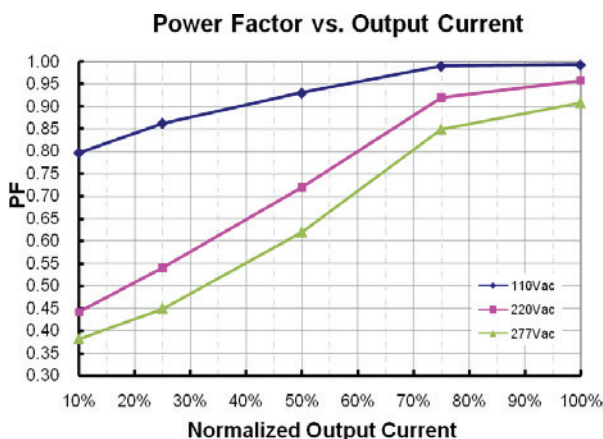

Specifications are subject to change without notice



<p>Europe/Asia Excelsys Technologies Ltd 27 Eastgate Drive Eastgate Business Park Little Island, Cork, Ireland IRELAND</p>	<p>t: +353 21 4354716 f: +353 21 4354864 e: sales@excelsys.com</p>	<p>North America Excelsys Technologies 519 Interstate 30, #309 Rockwall, TX 75087 USA</p>	<p>t: (972) 771 4544 f: (972) 421 1805 e: salesusa@excelsys.com</p>
---	--	--	---