
Elevated SMT 16-Pin USB Type-C®

Key features

- Elevated with centreline 3.5mm above PCB
- 16 SMT contact pins with 4 Through-Hole shell stakes
- Option to place parts underneath connector

Surface mount USB4800 has 16 pins to meet USB2.0 specification for power & data and is designed with a centreline elevated 3.5mm above the PCB surface. A potential advantage of the product elevation is the ability to use components with less than a 1.6mm profile beneath the connector.

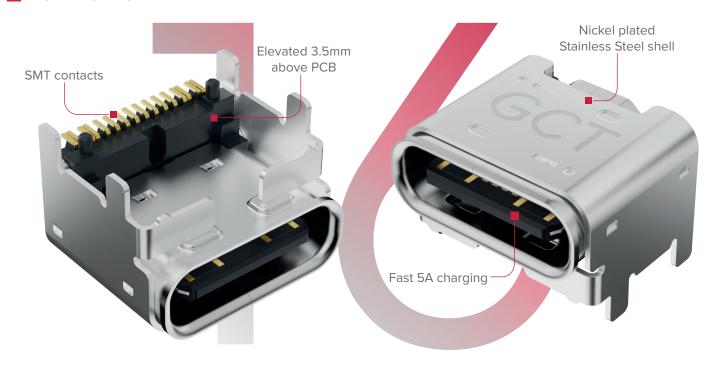

Product Specifications						
Interface	Current rating	No. Of Contacts	Mating Cycles	USB Specification	Profile Above PCB	Mount Type
USB Type-C	5 Amps	16	10,000	2.0	3.5mm	Top mount

Product demonstration -

— → gct.co/connector/usb4800

