


# Data sheet


## chainflex® CF10



Control cable (Class 7.6.4.1) ● For heaviest duty applications ● TPE outer jacket ● Shielded ● Oil and bio-oil resistant ● PVC and halogen-free ● Low-temperature-flexible ● Hydrolysis and microbe-resistant

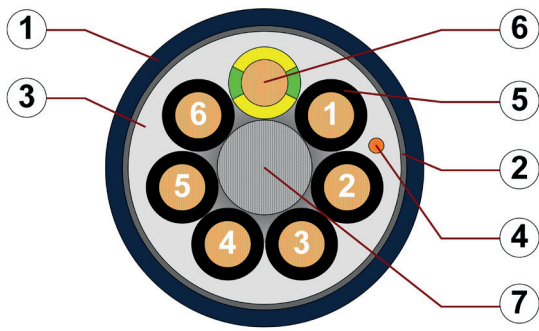

1. Outer jacket: Pressure extruded, halogen-free TPE mixture
2. Overall shield: Extremely bending-resistant braiding made of tinned copper wires
3. Inner jacket: Pressure extruded, gusset-filling TPE mixture
4. CFRIP: Tear strip for faster cable stripping
5. Core insulation: Mechanically high-quality TPE mixture
6. Conductor: Stranded conductor in especially bend-resistant version consisting of bare copper wires
7. Strain relief: Tensile stress-resistant centre element
8. 12 cores or more: Bundles with optimised pitch length and pitch direction



**Example image**  
For detailed overview please see design table

### Cable structure

	<b>Conductor</b>	Stranded conductor in especially bending-resistant version consisting of bare copper wires (following DIN EN 60228).
	<b>Core insulation</b>	Mechanically high-quality TPE mixture.
	<b>Core structure</b>	<b>Number of cores &lt; 12:</b> Cores wound in a layer with short pitch length. <b>Number of cores ≥ 12:</b> Cores wound in bundles which are then wound around a high tensile strength centre element, all with optimised short pitch lengths and directions. Especially low-torsion structure.
	<b>Core identification</b>	<b>Cores &lt; 0.75 mm<sup>2</sup>:</b> Colour code in accordance with DIN 47100. <b>Cores ≥ 0.75 mm<sup>2</sup>:</b> Black cores with white numbers, one green-yellow core. <b>CF10.03.05.INI:</b> brown, blue, black, white, green-yellow
	<b>Inner jacket</b>	TPE mixture adapted to suit the requirements in e-chains®.
	<b>Overall shield</b>	Extremely bending-resistant braiding made of tinned copper wires. Coverage approx. 70 % linear, approx. 90 % optical
	<b>Outer jacket</b>	Low-adhesion, extremely abrasion-resistant and highly flexible TPE mixture, adapted to suit the requirements in e-chains®. Colour: Steel-blue (similar to RAL 5011) Printing: white
	<b>CFRIP®</b>	Strip cables faster: a tear strip is moulded into the inner jacket Video ► <a href="http://www.igus.eu/CFRIP">www.igus.eu/CFRIP</a>

„00000 m\*\* igus chainflex CF10.--① -----② 300/500V E310776

RU AWM Style -----③ 90°C ---V④ RoHS-II conform EAC CE UKCA

[www.igus.eu](http://www.igus.eu) +++ chainflex cable works +++

\* **Length printing:** Not calibrated. Only intended as an orientation aid.  
① / ② Cable identification according to Part No. (see technical table).  
③ / ④ Printing of UL information (see related chapter).  
Example: ... chainflex ... **CF10.01.12** ... (12x0.14)C ... 300 V/500 V ...



# Data sheet

## chainflex® CF10



Control cable (Class 7.6.4.1) ● For heaviest duty applications ● TPE outer jacket ● Shielded ● Oil and bio-oil resistant ● PVC and halogen-free ● Low-temperature-flexible ● Hydrolysis and microbe-resistant



Example image  
igus® chainflex® CF10

### Dynamic information

	<b>Bend radius</b>	e-chain® linear flexible fixed	minimum 5 x d minimum 4 x d minimum 3 x d
	<b>Temperature</b>	e-chain® linear flexible fixed	-35 °C up to +100 °C -50 °C up to +100 °C (following DIN EN 60811-504) -55 °C up to +100 °C (following DIN EN 50305)
	<b>v max.</b>	unsupported gliding	10 m/s 6 m/s
	<b>a max.</b>		100 m/s <sup>2</sup>
	<b>Travel distance</b>		Unsupported travel distances and up to 400 m for gliding applications, Class 6

These values are based on specific applications or tests. They do not represent the limit of what is technically feasible.

### Guaranteed service life according to guarantee conditions

Double strokes	5 million	7.5 million	12.5 million
Temperature, from/to [°C]	R min. [factor x d]	R min. [factor x d]	R min. [factor x d]
-35/-25	6.8	7.5	8.5
-25/+90	5	6	7
+90/+100	6.8	7.5	8.5

Minimum guaranteed service life of the cable under the specified conditions.  
The installation of the cable is recommended within the middle temperature range.

### Electrical information

	<b>Nominal voltage</b>	300/500 V (following DIN VDE 0298-3) Cores < 0.5 mm <sup>2</sup> : 300 V (following UL) Cores ≥ 0.5 mm <sup>2</sup> : 1000 V (following UL)
	<b>Testing voltage</b>	2000 V (following DIN EN 50395)



# Data sheet













## chainflex® CF10



Control cable (Class 7.6.4.1) ● For heaviest duty applications ● TPE outer jacket ● Shielded  
 ● Oil and bio-oil resistant ● PVC and halogen-free ● Low-temperature-flexible ● Hydrolysis  
 and microbe-resistant



### Properties and approvals

-  **UV resistance** High
-  **Oil resistance** Oil-resistant (following DIN EN 60811-404), bio-oil-resistant (following VDMA 24568 with Plantocut 8 S-MB tested by DEA), Class 4
-  **Silicone-free** Free from silicone which can affect paint adhesion (following PV 3.10.7 – status 1992)
-  **Halogen-free** Following DIN EN 60754
-  **UL verified** Certificate No. B129699: „igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year“
-  **UL AWM** Details see table UL AWM
-  **EAC** Certificate No. RU C-DE.ME77.B.00300/19 (TR ZU)
-  **REACH** In accordance with regulation (EC) No. 1907/2006 (REACH)
-  **Lead-free** Following 2011/65/EC (RoHS-II/RoHS-III)
-  **Cleanroom** According to ISO Class 1. The outer jacket material of this series complies with CF9.15.07 - tested by IPA according to standard DIN EN ISO 14644-1
-  **CE** Following 2014/35/EU
-  **UK CA** In accordance with the valid regulations of the United Kingdom (as at 08/2021)



### Properties and approvals

#### UL AWM details

Conductor nominal cross section [mm <sup>2</sup> ]	Number of cores	UL style core insulation	UL style outer jacket	UL Voltage Rating [V]	UL Temperature Rating [°C]
0,14	12-18	11884	22357	300	90
0,25	4-25	11884	22357	300	90
0,34	5	11884	22357	300	90
0,5	4-25	11886	22351	1000	90
0,75	4-25	11886	22351	1000	90
1	2-25	11886	22351	1000	90
1,5	4-18	11886	22351	1000	90
2,5	4-12	11886	22351	1000	90
4	4-5	11886	22351	1000	90

Example image  
igus® chainflex® CF10

# Data sheet

## chainflex® CF10




Control cable (Class 7.6.4.1) ● For heaviest duty applications ● TPE outer jacket ● Shielded ● Oil and bio-oil resistant ● PVC and halogen-free ● Low-temperature-flexible ● Hydrolysis and microbe-resistant



Example image

### Typical lab test setup for this cable series

Test bend radius R	approx. 28 - 100 mm
Test travel S	approx. 1 - 15 m
Test duration	minimum 2 - 4 million double strokes
Test speed	approx. 0.5 - 2 m / s
Test acceleration	approx. 0.5 - 1.5 m / s <sup>2</sup>

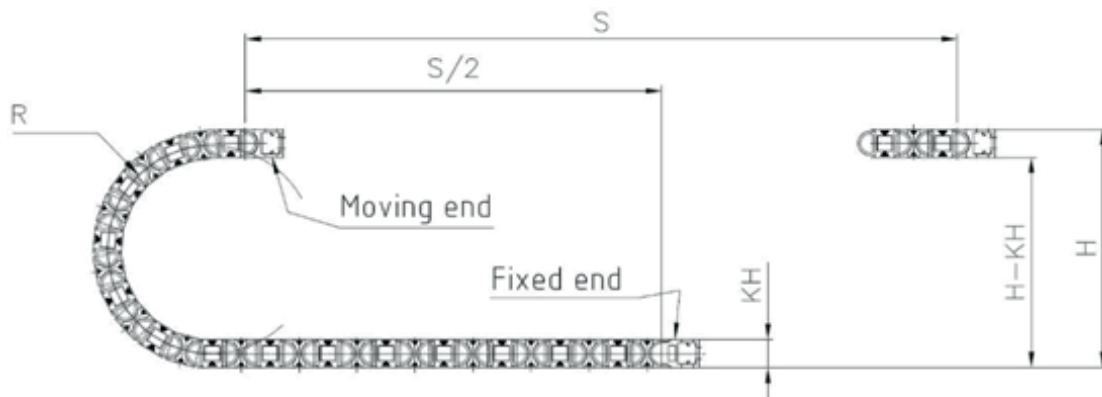

### Typical application areas

- For heaviest duty applications, Class 7
- Unsupported travel distances and up to 400 m and more for gliding applications, Class 6
- Almost unlimited resistance to oil, also with bio-oils, Class 4
- No torsion, Class 1
- Indoor and outdoor applications, UV-resistant
- Storage and retrieval units for high-bay warehouses, Machining units/machine tools, quick handling, Clean room, semiconductor insertion, outdoor cranes, low temperature applications



# Data sheet

## chainflex® CF10



Control cable (Class 7.6.4.1) ● For heaviest duty applications ● TPE outer jacket ● Shielded  
● Oil and bio-oil resistant ● PVC and halogen-free ● Low-temperature-flexible ● Hydrolysis  
and microbe-resistant

### Technical tables:

#### Mechanical information

Part No.	Number of cores and conductor nominal cross section	Outer diameter (d) max.	Copper index	Weight
	[mm <sup>2</sup> ]	[mm]	[kg/km]	[kg/km]
CF10.01.12	(12x0.14)C	8.0	38	78
CF10.01.18	(18x0.14)C	9.5	64	121
CF10.02.04	(4x0.25)C	6.5	24	49
CF10.02.08	(8x0.25)C	8.0	40	78
CF10.02.12	(12x0.25)C	9.5	66	122
CF10.02.25	(25x0.25)C	12.5	112	212
CF10.03.05.INI	(5x0.34)C	7.0	34	63
CF10.05.04	(4x0.5)C	7.0	37	67
CF10.05.05	(5x0.5)C	7.5	43	76
CF10.05.07	(7x0.5)C	8.5	57	99
CF10.05.12	(12x0.5)C	11.5	106	185
CF10.05.18	(18x0.5)C	13.5	144	251
CF10.05.25	(25x0.5)C	15.0	186	318
CF10.07.04	(4G0.75)C	7.5	48	83
CF10.07.05	(5G0.75)C	8.0	58	95
CF10.07.07	(7G0.75)C	9.5	89	140
CF10.07.12	(12G0.75)C	12.0	136	230
CF10.07.20	(20G0.75)C	15.0	212	345
CF10.07.25	(25G0.75)C	16.0	253	420
CF10.10.02	(2x1.0)C	7.5	37	70
CF10.10.03	(3G1.0)C	7.5	48	80
CF10.10.04	(4G1.0)C	8.0	61	99
CF10.10.05	(5G1.0)C	8.5	70	116
CF10.10.07	(7G1.0)C	10.0	109	170
CF10.10.12	(12G1.0)C	13.5	175	286
CF10.10.18	(18G1.0)C	15.5	246	391
CF10.10.25	(25G1.0)C	18.0	322	520
CF10.15.04	(4G1.5)C	9.0	94	142
CF10.15.05	(5G1.5)C	10.0	112	166
CF10.15.07 <sup>17)</sup>	(7G1.5)C	11.5	149	231
CF10.15.12	(12G1.5)C	15.5	243	383
CF10.15.18	(18G1.5)C	19.0	372	579

<sup>17)</sup> When using the cables with „7G1.5mm<sup>2</sup>“ and „G2.5mm<sup>2</sup>“ minimum bend radius must be 17.5xd with gliding travel distance ≥ 5m.

Note: The given outer diameters are maximum values and may tend toward lower tolerance limits.  
G = with green-yellow earth core x = without earth core



Example image



# Data sheet

## chainflex® CF10



Control cable (Class 7.6.4.1) ● For heaviest duty applications ● TPE outer jacket ● Shielded ● Oil and bio-oil resistant ● PVC and halogen-free ● Low-temperature-flexible ● Hydrolysis and microbe-resistant

### Technical tables:

#### Mechanical information

Part No.	Number of cores and conductor nominal cross section [mm <sup>2</sup> ]	Outer diameter (d) max. [mm]	Copper index [kg/km]	Weight [kg/km]
CF10.25.04	(4G2.5)C	11.0	140	220
CF10.25.07 <sup>17)</sup>	(7G2.5)C	13.5	228	347
CF10.25.12	(12G2.5)C	19.5	375	619
CF10.40.04	(4G4.0)C	12.5	208	305
CF10.40.05	(5G4.0)C	13.5	254	370

<sup>17)</sup> When using the cables with „7G1.5mm<sup>2</sup>“ and „G2.5mm<sup>2</sup>“ minimum bend radius must be 17.5xd with gliding travel distance ≥ 5m.

**Note:** The given outer diameters are maximum values and may tend toward lower tolerance limits.  
G = with green-yellow earth core x = without earth core

#### Electrical information

Conductor nominal cross section [mm <sup>2</sup> ]	Maximum conductor resistance at 20 °C (following DIN EN 50289-1-2) [Ω/km]	Max. current rating at 30 °C [A]
0.14	138	2.5
0.25	79	5
0.34	57	7
0.5	39	10
0.75	26	14
1	19.5	17
1.5	13.3	21
2.5	8	30
4	4.95	41

The final maximum current rating depends among other things on the ambient conditions, the type of the installation and the number of loaded cores.



Example image



# Data sheet

## chainflex® CF10



Control cable (Class 7.6.4.1) ● For heaviest duty applications ● TPE outer jacket ● Shielded ● Oil and bio-oil resistant ● PVC and halogen-free ● Low-temperature-flexible ● Hydrolysis and microbe-resistant

### Design table

Part No.	Number of cores	Core design	Part No.	Number of cores	Core design
CF10.XX.02	2		CF10.XX.08	8	
CF10.XX.03	3		CF10.XX.12	4x3	
CF10.XX.04	4		CF10.XX.18	6x3	
CF10.XX.05.INI	5		CF10.XX.20	5x4	
CF10.XX.05	5		CF10.XX.25	5x5	
CF10.XX.07	7				



Example image

igus® chainflex® CF10

# Data sheet

## chainflex® CF10



Control cable (Class 7.6.4.1) ● For heaviest duty applications ● TPE outer jacket ● Shielded ● Oil and bio-oil resistant ● PVC and halogen-free ● Low-temperature-flexible ● Hydrolysis and microbe-resistant

### Colour code in accordance with DIN 47100.

Conductor no.	Colours according to DIN ISO 47100
1	white
2	brown
3	green
4	yellow
5	grey
6	pink
7	blue
8	red
9	black
10	violet
11	grey-pink
12	red-blue
13	white-green
14	brown-green
15	white-yellow
16	brown-yellow
17	white-grey
18	brown-grey

Conductor no.	Colours according to DIN ISO 47100
19	white-pink
20	white-brown
21	white-blue
22	brown-blue
23	white-red
24	brown-red
25	white-black
26	brown-black
27	grey-green
28	yellow-grey
29	pink-green
30	yellow-pink
31	green-blue
32	yellow-blue
33	green-red
34	yellow-red
35	green-black
36	yellow-black



Example image



igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year

