


# Data sheet

## chainflex® CF887





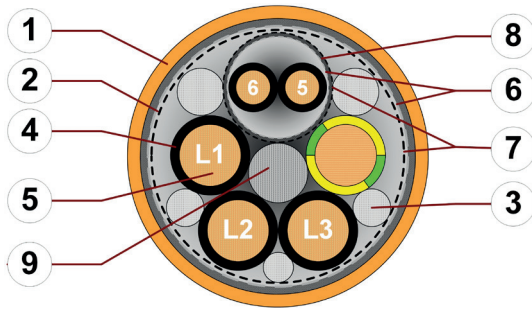




Servo cable (Class 3.1.1.1) ● For flexing applications ● PVC outer jacket ● Shielded ● Flame retardant



1. Outer jacket: Pressure extruded PVC mixture
2. Overall shield: Braiding made of tinned copper wires
3. Filling: Plastic yarns
4. Core insulation: Mechanically high-quality, especially low-capacitance TPE mixture
5. Conductor: Stranded conductor consisting of bare copper wires
6. Shield foil: Aluminium clad plastic foil
7. Banding: Plastic foil
8. Element shield: Wrapping made of tinned copper wires
9. Strain relief: Plastic centre element

**Example image**  
For detailed overview please see design table

### Cable structure

	<b>Conductor</b>	Conductor consisting of bare copper wires (according to DIN EN 60228).
	<b>Core insulation</b>	Mechanically high-quality, especially low-capacitance TPE mixture.
	<b>Core structure</b>	Power cores and control pair elements wound together in an optimised pitch length.
	<b>Core identification</b>	<p><b>Power cores:</b> Black cores with white numbers, one green-yellow core.                      1. Core: U / L1 / C / L+ 2. Core: V / L2 3. Core: W / L3 / D / L-</p> <p><b>1 Control pair:</b> Black cores with white numbers.                      1. Control core: 5 2. Control core: 6</p> <p><b>2 Control pairs:</b> Black cores with white numbers.                      1. Control core: 5 2. Control core: 6                      3. Control core: 7 4. Control core: 8</p>
	<b>Element shield</b>	Aluminum/polyester tape
	<b>Overall shield</b>	Braiding made of tinned copper wires. Coverage approx. 60 % optical
	<b>Outer jacket</b>	Low-adhesion PVC mixture, adapted to suit the requirements in e-chains®. <b>Colour:</b> Pastel orange (similar to RAL 2003) <b>Printing:</b> black

„00000 m\*\* igus chainflex M CF887.---.---.---① ---② 600/1000V E310776

cRUs AWM Style 2570 VW-1 AWM I/II A/B 80°C 1000V FT1 EAC/CTP

CE RoHS-II conform [www.igus.de](http://www.igus.de) +++ chainflex cable works +++

\* **Length printing:** Not calibrated. Only intended as an orientation aid.  
 ① / ② Cable identification according to Part No. (see technical table).  
 Example: ... chainflex **CF887.15.15.02.01 (4G1.5+(2x1.5)C)C 600/1000V ...**



Example image

# Data sheet

## chainflex® CF887



Servo cable (Class 3.1.1.1) ● For flexing applications ● PVC outer jacket ● Shielded ● Flame retardant

### Dynamic information

	<b>Bend radius</b>	e-chain® linear flexible fixed	minimum 15 x d minimum 12 x d minimum 8 x d
	<b>Temperature</b>	e-chain® linear flexible fixed	+5 °C up to +70 °C -5 °C up to +70 °C (following DIN EN 60811-504) -15 °C up to +70 °C (following DIN EN 50305)
	<b>v max.</b>	unsupported	3 m/s
	<b>a max.</b>		20 m/s <sup>2</sup>
	<b>Travel distance</b>		Unsupported travel distances up to 10 m, Class 1

These values are based on specific applications or tests. They do not represent the limit of what is technically feasible.


### Guaranteed service life according to guarantee conditions

Double strokes	1 million	3 million	5 million
Temperature, from/to [°C]	R min. [factor x d]	R min. [factor x d]	R min. [factor x d]
+5/+15	17.5	18.5	19.5
+15/+60	15	16	17
+60/+70	17.5	18.5	19.5

Minimum guaranteed service life of the cable under the specified conditions.  
The installation of the cable is recommended within the middle temperature range.

### Electrical information

	<b>Nominal voltage</b>	600/1000 V (following DIN VDE 0298-3) 1000 V (following UL)
	<b>Testing voltage</b>	4000 V (following DIN EN 50395)



Example image

igus® chainflex® CF887

# Data sheet









## chainflex® CF887



Servo cable (Class 3.1.1.1) ● For flexing applications ● PVC outer jacket ● Shielded ● Flame retardant



### Properties and approvals

-  **Flame retardant** According to IEC 60332-1-2, FT1, VW-1
-  **Silicone-free** Free from silicone which can affect paint adhesion (following PV 3.10.7 – status 1992)
-  **UL verified** Certificate No. B129699: „igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year“
-  **UL/CSA AWM** See table UL/CSA AWW for details
-  **NFPA** Following NFPA 79-2018, chapter 12.9
-  **EAC** Certificate No. RU C-DE.ME77.B.00302/19 (TR ZU)
-  **REACH** In accordance with regulation (EC) No. 1907/2006 (REACH)
-  **Lead-free** Following 2011/65/EC (RoHS-II/RoHS-III)
-  **CE** Following 2014/35/EU



### Properties and approvals

#### UL/CSA AWM Details

Conductor nominal cross section [mm <sup>2</sup> ]	UL style core insulation	UL style outer jacket	UL Voltage Rating [V]	UL Temperature Rating [°C]
0.5	10492	2570	1000	80
0.75	10492	2570	1000	80
1	10492	2570	1000	80
1.5	10492	2570	1000	80
2.5	10492	2570	1000	80
4	10492	2570	1000	80

Example image

igus® chainflex® CF887

# Data sheet

## chainflex® CF887




Servo cable (Class 3.1.1.1) ● For flexing applications ● PVC outer jacket ● Shielded ● Flame retardant



### Typical lab test setup for this cable series

Test bend radius R	approx. 75 - 225 mm
Test travel S	approx. 1 - 15 m
Test duration	minimum 2 - 4 million double strokes
Test speed	approx. 0.5 - 2 m / s
Test acceleration	approx. 0.5 - 1.5 m / s <sup>2</sup>

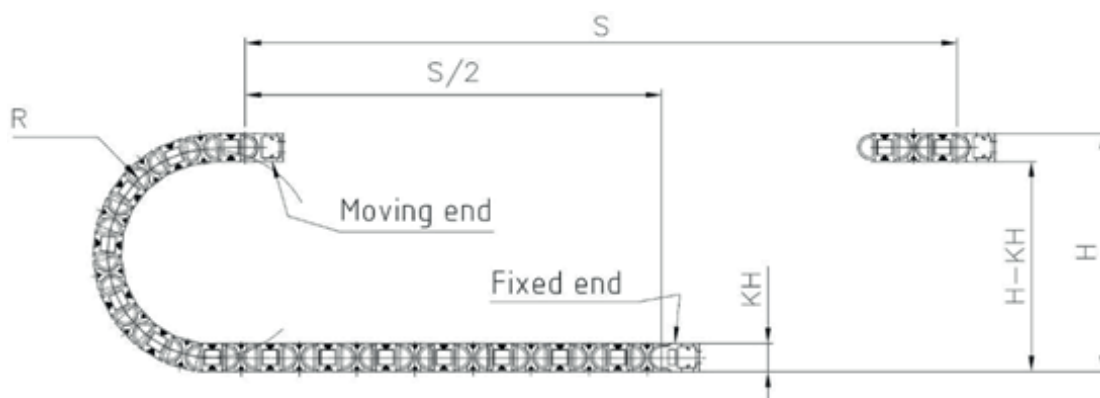

### Typical application areas

- For flexing applications, Class 3
- Especially for unsupported travels, Class 1
- Without influence of oil, Class 1
- No torsion, Class 1
- Preferably indoor applications
- Wood/stone processing, Packaging industry, supply systems, Handling, adjusting equipment



igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year



Example image

igus® chainflex® CF887

# Data sheet

## chainflex® CF887



Servo cable (Class 3.1.1.1) ● For flexing applications ● PVC outer jacket ● Shielded ● Flame retardant



### Technical tables:

#### Mechanical information

Part No.	Number of cores and conductor nominal cross section [mm²]	Outer diameter (d) max. [mm]	Copper index [kg/km]	Weight [kg/km]
<b>1 Control pair shielded</b>				
CF887.15.15.02.01	(4G1.5+(2x1.5)C)C	12.5	124	200
CF887.25.15.02.01	(4G2.5+(2x1.5)C)C	13.5	182	254
CF887.40.15.02.01	(4G4.0+(2x1.5)C)C	14.5	236	340
<b>2 Control pairs shielded</b>				
CF887.10.07.02.02	(4G1.0+2x(2x0.75)C)C	11.5	110	184
CF887.15.15.02.02	(4G1.5+2x(2x1.5)C)C	13.5	164	253
CF887.25.15.02.02	(4G2.5+2x(2x1.5)C)C	14.5	217	325
<b>1 Control pair shielded</b>				
CF887.07.05.02.01	(4G0.75+(2x0.5)C)C	10.0	69	119

**Note:** The given outer diameters are maximum values and may tend toward lower tolerance limits.  
**G** = with green-yellow earth core **x** = without earth core


#### Electrical information

Conductor nominal cross section [mm²]	Maximum conductor resistance at 20 °C (following DIN EN 50289-1-2) [Ω/km]	Max. current rating at 30 °C [A]
0.5	39	10
0.75	26	13
1	19.5	15
1.5	13.3	19
2.5	8	27
4	4.95	37

The final maximum current rating depends among other things on the ambient conditions, the type of the installation and the number of loaded cores.

### Capacity

Part No.	Power cores		Control cores	
	Core/Core	Core/Shield	Core/Core	Core/Shield
	Capacity [approx. pF / m]	Capacity [approx. pF / m]	Capacity [approx. pF / m]	Capacity [approx. pF / m]
<b>1 Control pair shielded</b>				
CF887.15.15.02.01	80	190	150	220
CF887.25.15.02.01	90	190	150	220
CF887.40.15.02.01	130	200	150	220
<b>2 Control pairs shielded</b>				
CF887.10.07.02.02	80	18	140	200
CF887.15.15.02.02	80	190	150	220
CF887.25.15.02.02	90	190	150	220



# Data sheet

## chainflex® CF887



Servo cable (Class 3.1.1.1) ● For flexing applications ● PVC outer jacket ● Shielded ● Flame retardant



### Design table

Art.-Nr.	Number of cores	Core design
CF887.XX.XX.XX.01	4+1x2	
CF887.XX.XX.02.02	4+2x2	



igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year



Example image