
Preferred Connector Products JAE



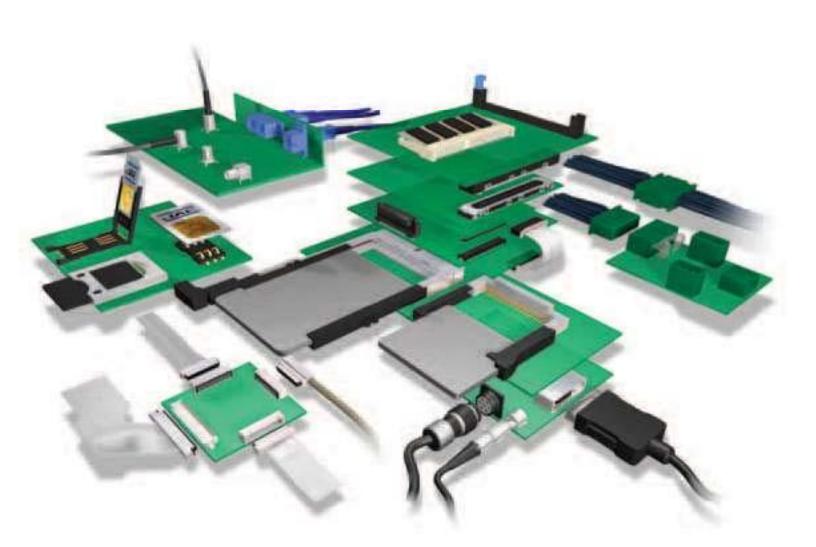

JAE Electronics, Inc.
For Additional Information Visit www.jae-connector.com

apan Aviation Electronics Industry, Ltd. (JAE) is an international manufacturer and supplier of electronic components and systems. For over four decades, JAE has provided the electronics industry with solutions to complex design requirements. Since its founding, the Company has strived to contribute to society through market-driven, technology-based global business operations under the philosophy: "Technology to Inspire Innovation."

With worldwide and world-class manufacturing certified to ISO 9001 and QS 9000, JAE has made the commitment to meet the global requirements of our customer. In addition to a network of state of the art manufacturing facilities, JAE has technical service offices located around the world, staffed with experts in connector design and application.

This catalog contains a select overview of JAE Connector Products. For in-depth information on our complete product line, and information on new developments, visit JAE's online catalog at www.jae-connector.com.

Innovative design, quality oriented manufacturing, commitment to our customers and sensitivity to the environment assures JAE's leadership position in the 21st century.



Table of Contents

		Table of Contents	
	Product Series	Contact Spacing	Pages
SOCKETS/	Memory Products		
	PCMCIA		
		1.27mm (.050")	5
		, , , , , , , , , , , , , , , , , , , ,	
	COMPACT FLASH		
		1.27mm (.050")	6 - 7
		1.27mm (.050")	
		1.27mm (.050")	
		, , , , , , , , , , , , , , , , , , , ,	
	PCI EXPRESS MINI CARD		
	MM60	0.8mm (.031")	10
		,	
	EXPRESSCARD		
		1.0mm (.039")	11 - 12
		1.0mm (.039") / 0.635mm (.025")	
	SMART/SIM CARD		
		2.54mm (.100")	
		2.54mm (.100")	
	SF6	2.54mm (.100")	17
	SF7	2.54mm (.100")	18
	SF7 (Slim)	2.54mm (.100")	19
	SF9	2.54mm (.100")	20
	SECURE DIGITAL CARD		
	SG5	2.50mm (.098")	21
	MINI SECURE DIGITAL CARD (
	ST4	1.1mm (.043")	22
	SC1	2.50mm (.098")	23
	MICRO SD/TRANSFLASH™		
	ST1	1.1mm (.043")	24
		1.1mm (.043")	
Board-to	D-BOARD CONNECTOR PRODUC	CTS	
	BOARD-TO-BOARD		
	AA03	0.40mm (.020")	26
	WA6	0.40mm (.020")	27
	WH1	0.40mm (.020")	28
		0.50mm (.020")	
		0.50mm (.020")	
		0.50mm (.020")	
		0.50mm (.020 ")	
		0.80mm (.031")	
		0.80mm (.031")	
		0.80mm (.031")	
		1.00mm (.039)	
		1.00mm (.039)	
	TX24/TX25	1.27mm (.050")	40



Table of Contents

BOARD-TO-BOARD CONNECTOR PRODUCTS		Product Series	Contact Spacing	Pages
PCB-T0-FPC/FFC FB3.	Board-	TO-BOARD CONNECTOR P	RODUCTS	
PCB-T0-FPC/FFC FB3.		WIRF-TO-ROARD		
FB3				
FB5			0.30mm (.012")	41
FB6				
FF02S				
FB8		FF02	0.30mm (.012")	44
FA5		FF02S	0.30mm (.012")	45
FF03		FB8	0.30mm (.012")	46
IL-FPR		FA5	0.50mm (.020")	47
PCB-TO-CABLE/FPC FI-J		FF03	0.50mm (.020")	48
FI-J		IL-FPR	0.50mm (.020")	49
FI-R		PCB-TO-CABLE/FPC		
FI-X		FI-J	0.40mm (.016")	50 - 51
FI		FI-R	0.50mm (.020")	52 - 53
PCB-T0-CABLE DX2/3		FI-X	1.00mm (.039")	54 - 55
DX2/3		FI	1.25mm (.049")	56 - 58
FI-E		PCB-TO-CABLE		
CN10 62 - 63 CV10 64 IL-Z 1.25mm (.049") 65 - 66 IL-S 2.00mm (.079") 67 - 68 LY 2.00mm (.079") 70 IL-G 2.50mm (.098") 71 INPUT/OUTPUT CONNECTOR PRODUCTS PCB-TO-CABLE DD1 0.50mm (.020") 74 - 75 DG1 0.50mm (.020") 74 - 75 DG1 0.50mm (.020") 76 RA1 0.50mm (.020") 77 RC1 0.50mm (.020") 77 RC1 0.50mm (.020") 77 RC1 0.50mm (.020") 78 DA1 0.60mm (.020") 78 DA1 0.60mm (.020") 78 CAN 0.50mm (.020") 79 DE1 1.27mm (.050") 80 TX20A 1.27mm (.050") 81 DV2 1.905mm (.075") 82 - 84 CIRCULAR JN1 85 - 86 JN2 87 - 88		DX2/3	0.80mm (.031")	59
CV10 64 IL-Z 1.25mm (.049") 65 - 66 IL-S 2.00mm (.079") 67 - 68 LY 2.00mm (.079") 69 KD10/20 2.00mm (.079") 70 IL-G 2.50mm (.098") 71 INPUT/OUTPUT CONNECTOR PRODUCTS PCB-TO-CABLE DD1 0.50mm (.020") 72 - 73 DD2 0.50mm (.020") 74 - 75 DG1 0.50mm (.020") 76 RA1 0.50mm (.020") 77 RC1 0.50mm (.020") 78 DA1 0.60mm (.024") 79 DE1 1.27mm (.050") 80 TX20A 1.27mm (.050") 81 DV2 1.905mm (.075") 82 - 84 CIRCULAR JN1 85 - 86 JN2 87 - 88		FI-E	1.00mm (.039")	60 - 61
IL-Z.		CN10		62 - 63
IL-S				
LY		IL-Z	1.25mm (.049")	65 - 66
KD10/20		IL-S	2.00mm (.079")	67 - 68
IL-G 2.50mm (.098") 71 INPUT/OUTPUT CONNECTOR PRODUCTS PCB-TO-CABLE DD1 0.50mm (.020") 72 - 73 DD2 0.50mm (.020") 74 - 75 DG1 0.50mm (.020") 76 RA1 0.50mm (.020") 77 RC1 0.50mm (.020") 77 RC1 0.50mm (.020") 78 DA1 0.60mm (.024") 79 DE1 1.27mm (.050") 80 TX20A 1.27mm (.050") 81 DV2 1.905mm (.075") 82 - 84 CIRCULAR JN1 85 - 86 JN2 87 - 88		LY	2.00mm (.079")	69
INPUT/OUTPUT CONNECTOR PRODUCTS PCB-TO-CABLE DD1				
PCB-TO-CABLE DD1 .0.50mm (.020") .72 - 73 DD2 .0.50mm (.020") .74 - 75 DG1 .0.50mm (.020") .76 RA1 .0.50mm (.020") .77 RC1 .0.50mm (.020") .78 DA1 .0.60mm (.024") .79 DE1 .1.27mm (.050") .80 TX20A .1.27mm (.050") .81 DV2 .1.905mm (.075") .82 - 84 CIRCULAR JN1 .85 - 86 JN2 .87 - 88		IL-G	2.50mm (.098")	71
PCB-TO-CABLE DD1 .0.50mm (.020") .72 - 73 DD2 .0.50mm (.020") .74 - 75 DG1 .0.50mm (.020") .76 RA1 .0.50mm (.020") .77 RC1 .0.50mm (.020") .78 DA1 .0.60mm (.024") .79 DE1 .1.27mm (.050") .80 TX20A .1.27mm (.050") .81 DV2 .1.905mm (.075") .82 - 84 CIRCULAR JN1 .85 - 86 JN2 .87 - 88	INDUT/O	ULTRUT CONNECTOR PRODU	lete	
DD1 0.50mm (.020") 72 - 73 DD2 0.50mm (.020") 74 - 75 DG1 0.50mm (.020") 76 RA1 0.50mm (.020") 77 RC1 0.50mm (.020") 78 DA1 0.60mm (.024") 79 DE1 1.27mm (.050") 80 TX20A 1.27mm (.050") 81 DV2 1.905mm (.075") 82 - 84 CIRCULAR JN1 85 - 86 JN2 87 - 88	INFUI/U		JU13	
DD2 .0.50mm (.020") .74 - 75 DG1 .0.50mm (.020") .76 RA1 .0.50mm (.020") .77 RC1 .0.50mm (.020") .78 DA1 .0.60mm (.024") .79 DE1 .1.27mm (.050") .80 TX20A .1.27mm (.050") .81 DV2 .1.905mm (.075") .82 - 84 CIRCULAR JN1 .85 - 86 JN2 .87 - 88			0 50mm / 020")	77 ₋ 72
DG1 0.50mm (.020") 76 RA1 0.50mm (.020") 77 RC1 0.50mm (.020") 78 DA1 0.60mm (.024") 79 DE1 1.27mm (.050") 80 TX20A 1.27mm (.050") 81 DV2 1.905mm (.075") 82 - 84 CIRCULAR JN1 85 - 86 JN2 87 - 88				
RA1				
RC1				
DA1				
DE1				
TX20A				
DV2				
JN1				
JN1		CIRCULAR		
JN287 - 88				85 - 86
JB589				
		JB5		89



Table of Contents

	Product Series	Contact Spacing	Pages
INPUT/O	UTPUT CONNECTOR PROD	UCTS	
	CIRCULAR		
			90 - 91
	JL05		92 - 93
	JB1		94 - 95
	SRCN		96 - 97
	N/MS		98 - 99
FIBER OF	PTIC PRODUCTS		
	F0-FC		100
	F0-EX		101
Аитомо	TIVE CONNECTOR PRODUC	ets .	
	PCB-TO-CABLE		
	MX34	1.1mm (.043")	102
	MX7	2.30mm (.091")	103
	IL-AG7	2.50mm (.098")	104
	MX17	2.50mm (.098")	105 - 106
	MX23A	2.50mm (.098")	107 - 108
	MX10	2.50mm (.098")	109
	MX5	3.00mm (.118")	110
	PCB-TO-CABLE/CABLE-	ΓO-CABLE	
	IL-AG5	2.50mm (.098")	111
	IL-AG6	2.50mm (.098")	112
	MX9	3.50mm (.138")	113
	MX25	6.7mm (2.64")	114
	MX36	2.50mm (.098")	115
	CABLE-TO-CABLE		
		2.50mm (.098")	116 - 118


- All JAE connector products shown in this catalog are lead free.
- We reserve the right to modify designs in order to improve quality, keep pace with technological advancements or meet particular requirements in production.

- Products shown in this catalog are made for the applications specified. However, if the above-mentioned products are to be used in aerospace devices, marine cable-connection devices, atomic power control systems, medical equipment for lifesupport systems, or any other specific application requiring extremely high reliability, please contact JAE for further information. Recommended Applications: Computers, Office Machines, Measuring Devices, Telecommunications Devices (Terminals, Mobile Devices) AV Devices, Household Applications, FA Devices, etc.
- Refer to end of catalog for alphabetical index of products.



DX2/3 SERIES CONNECTORS


0.80mm (0.031") Contact Spacing, PCB-to-Cable Connectors

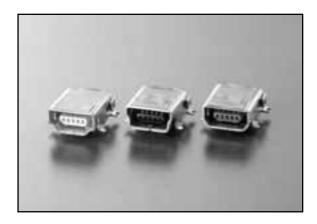

FEATURES

- Conform to USB 2.0 specification
- DX2 is Type B and DX3 is Type AB
- Embossed tape for automatic mounting
- Kapton tape for easy absorbtion during automatic mounting
- · Positioning bosses for board mounting

Connector Profile (Ref.)

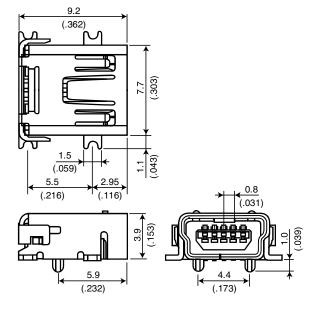

.

The DX2 and DX3 series are JAE's mini USB connectors that conform to USB 2.0 standards. The DX2 is the Type B and the DX3 is the Type AB. The DX2 and DX3 series are 0.8mm (0.03") pitch connectors and are available in five positions. A polyester film tape is used for easy attachment at automatic mounting. Positioning bosses are used for board mounting. Applications include compact portable devices such as PDAs, DSCs, mobile phones, and various peripheral devices.


GENERAL SPECIFICATIONS

Number of Contacts	5 pos.
Contact Spacing	0.80mm (0.031")
Contact Resistance	50 milliohm max. (initial)
Dielectric Withstanding Voltage	100VAC r.m.s. (for one minute)
Insulation Resistance	100 megohms min. (initial)
Rated Current	1.0A
Rated Voltage	30VAC r.m.s.
Operating Temperature	-20°C to +60°C
Lifetime	5,000 cycles

MATERIALS AND FINISHES

Description	Materials/Finishes	
Contact	Copper Alloy Contact: Gold plating over Nickel (0.76µm min.) Terminal: Tin/Copper flash over Nickel	
Insulator	Glass filled nylon	
Shell	Copper Alloy/Tin Main unit: Tin plating over Nickel Through-hole position: Tin plating over Nickel	

ORDERING INFORMATION

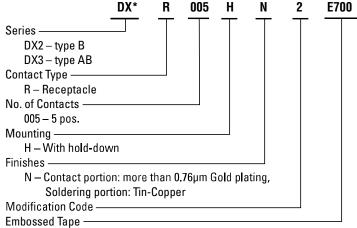


E700 - 700 pcs/reel





"Building Technologies to Connect Your World"

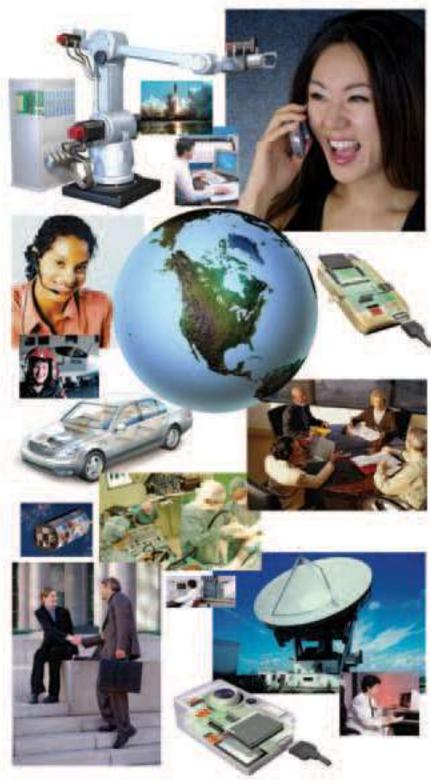

Printed in the U.S.A. 10M807TA SF3

Japan Aviation Electronics Industry, Limited

1-19, Aobadai 3-chome, Meguro-ku Tokyo 153-8539, Japan

Telephone: 03-3780-2736 Fax: 03-3780-2883

JAE Electronics, Inc.

142 Technology Drive, Suite 100 Irvine, California 92618-2430, U.S.A.

Telephone: 949-753-2600 Fax: 949-753-2699

800-523-7278 Toll free in the U.S.A.

JAE Europe

Coliseum Business Centre Riverside Way, Camberley Surrey, GU15 3YL, England Telephone: 44-1276-404000

Fax: 44-1276-404010

JAE Taiwan, Ltd.

4F-1, No. 88, Chung Hsiao E. Rd. Sec. 2, Taipei, Taiwan, R.O.C. Telephone: 886-2-2396-7676 Fax: 886-2-2392-5929

JAE Hong Kong, Ltd.

Suites 1407-11, 14/F, Tower 2, The Gateway, 25 Canton Road, Tsimshatsui, Kowloon, Hong Kong

Telephone: 852-2723-7782 Fax: 852-2723-9028

JAE Korea, Inc.

1602, Korea City Air Tower 159-9 Samsung-Dong, Kangnam-ku Seoul, 135-973, Korea Telephone: 82-2-551-8959

Fax: 82-2-551-8958

JAE Philippines, Inc.

PEZA Zone, Gateway Business Park, Javalera General Trias, 4107 Cavite, Philippines

Telephone: 63-46-433-0285 Fax: 63-46-433-0287

JAE Singapore Pte., Ltd.

33 Tannery Lane, #02-01 Hoesteel **Industrial Building** Singapore 347789

Telephone: 65-6748-1332 Fax: 65-6748-2920

JAE Shanghai Co., Ltd.

RM 1407, Shanghai Mart 2299 Yanan Rd.

West Shanghai 200336 P.R.C. Telephone: 86-21-6236-0322 Fax: 86-21-6236-1292