





# General Purpose Metallized Polyester Film Capacitors

Automotive Grade

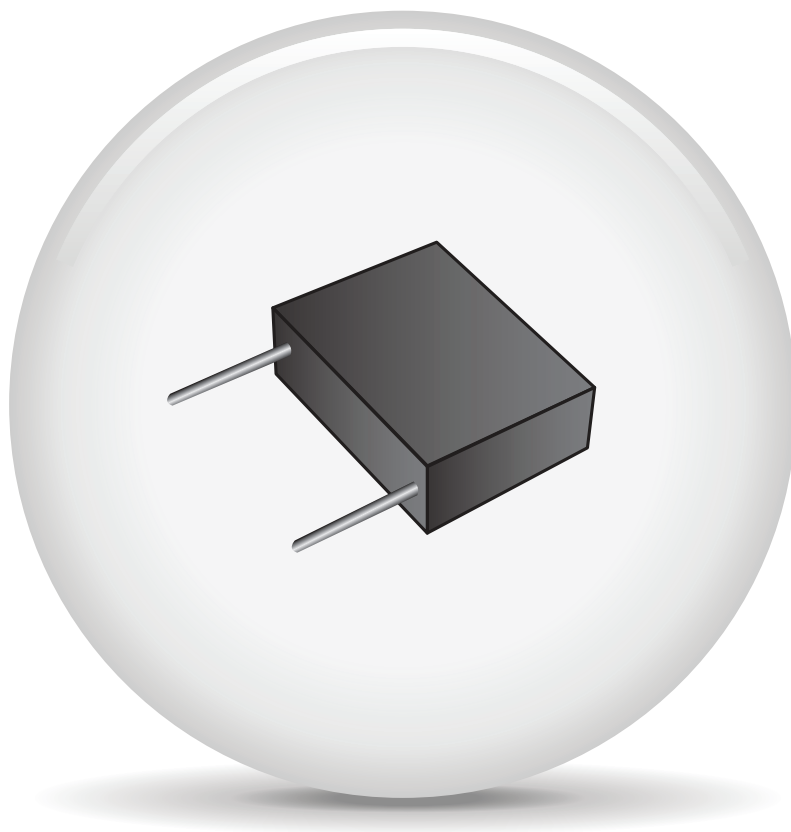

Engineering Kit

Electronic Components  
**KEMET**  
CHARGED.®

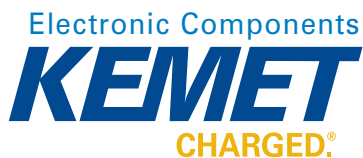

# Film Capacitors

## BILL OF MATERIALS

Kit Part No. **FLM-ENG-KIT-23**

Part No:	Qty:	Bin Loc:	Description:
R60DF4330AA6AK	3	1	Film, 3.3 $\mu$ F, $\pm$ 10% Tol, -55/+105°C, 63 VDC, Lead Spacing=10 mm
R60GF3470AA6AK	3	2	Film, 0.47 $\mu$ F, $\pm$ 10% Tol, -55/+105°C, 160 VDC, Lead Spacing=10 mm
R60PF2470AA6AK	3	3	Film, 0.047 $\mu$ F, $\pm$ 10% Tol, -55/+105°C, 630 VDC, Lead Spacing=10 mm
R60DI4470AAL0K	3	4	Film, 4.7 $\mu$ F, $\pm$ 10% Tol, -55/+105°C, 63 VDC, Lead Spacing=15 mm
R60MI3680AA40K	3	5	Film, 0.68 $\mu$ F, $\pm$ 10% Tol, -55/+105°C, 400 VDC, Lead Spacing=15 mm
R60QI2330AAL0K	3	6	Film, 0.033 $\mu$ F, $\pm$ 10% Tol, -55/+105°C, 1000 VDC, Lead Spacing=15 mm
R60EN4330AA30K	3	7	Film, 3.3 $\mu$ F, $\pm$ 10% Tol, -55/+105°C, 100 VDC, Lead Spacing=22.5 mm
R60IN4100AA30K	3	8	Film, 1.0 $\mu$ F, $\pm$ 10% Tol, -55/+105°C, 250 VDC, Lead Spacing=22.5 mm
R60PN3680AA40K	3	9	Film, 0.68 $\mu$ F, $\pm$ 10% Tol, -55/+105°C, 630 VDC, Lead Spacing=22.5 mm
R60DR5220AA40K	3	10	Film, 22 $\mu$ F, $\pm$ 10% Tol, -55/+105°C, 63 VDC, Lead Spacing=27.5 mm
R60GR5330AA00K	3	11	Film, 33 $\mu$ F, $\pm$ 10% Tol, -55/+105°C, 160 VDC, Lead Spacing=27.5 mm
R60QR3470AA40K	3	12	Film, 0.47 $\mu$ F, $\pm$ 10% Tol, -55/+105°C, 1000 VDC, Lead Spacing=27.5 mm
R60DV6100AA40K	2	13	Film, 100 $\mu$ F, $\pm$ 10% Tol, -55/+105°C, 63 VDC, Lead Spacing=37.5 mm
R66ED4100AA7AK	3	14	Film, 1.0 $\mu$ F, $\pm$ 10% Tol, -55/+105°C, 100 VDC, Lead Spacing=7.5 mm
R66ID3220AA7AK	3	15	Film, 0.22 $\mu$ F, $\pm$ 10% Tol, -55/+105°C, 250 VDC, Lead Spacing=7.5 mm
R66MD2680AA7AK	3	16	Film, 0.068 $\mu$ F, $\pm$ 10% Tol, -55/+105°C, 400 VDC, Lead Spacing=7.5 mm
R82EC1100AA50K	3	17	Film, 1000 pF, $\pm$ 10% Tol, -55/+105°C, 100 VDC, Lead Spacing=5 mm
R82IC3150AA50K	3	18	Film, 0.15 $\mu$ F, $\pm$ 10% Tol, -55/+105°C, 250 VDC, Lead Spacing=5 mm
R82MC2470AA50K	3	19	Film, 0.047 $\mu$ F, $\pm$ 10% Tol, -55/+105°C, 400 VDC, Lead Spacing=5 mm
RSBDC4150AA10K	3	20	Film, 1.5 $\mu$ F, $\pm$ 10% Tol, -55/+125°C, 63 VDC, Lead Spacing=5 mm
RSBIC3100AA00K	3	21	Film, 0.1 $\mu$ F, $\pm$ 10% Tol, -55/+125°C, 250 VDC, Lead Spacing=5 mm
RSBPC2100AA00K	3	22	Film, 0.01 $\mu$ F, $\pm$ 10% Tol, -55/+125°C, 630 VDC, Lead Spacing=5 mm
KEMDTS-FLM-ENG-KIT-23	1	-	General Purpose Metallized Polyester Film Capacitors, Automotive Grade Data Sheet

### Bin Diagram

This edge to hinge



1	7	13	19
2	8	14	
3	9	15	20
4	10	16	
5	11	17	21
6	12	18	

### Corporate Headquarters

KEMET Corporation  
 2835 KEMET Way  
 Simpsonville, SC 29681  
 USA  
 Tel: 864.963.6300