

# XLamp® XP-E2 PC Amber LED Product Change Notification

Customer Name: XP-E2 PC Amber Customers PCN Reference Number: CreeLED-PCN-5159

Date Issued: May 14, 2021

Please be advised that Cree LED is updating the XLamp® XP-E2 PC Amber LED product with improved performance, utilizing our latest technology platform which will result in better manufacturing flexibility and improved lead times.

Please review the additional PCN information below.

#### **Affected Product**

Table 1 provides a list of products affected by this change:

Table 1 Affected Products List

Cree LED Part Number
XPEBPA-L1-xxxx-xxxxx

## **Description of the Change**


Cree LED will be changing the typical forward voltage and temperature coefficient of voltage characteristics for XP-E2 PC Amber LEDs. Table 2 shows the current and new values.

Table 2 Affected Products List

	Current Typical	New Typical
Forward voltage	3.0 V @ 350 mA, 25 °C	2.94 V @ 350 mA, 25 °C
Temperature coefficient of voltage	-2.5 mV/°C	-1.6 mV/°C



The following graph shows the improved Forward Voltage vs. Current curve.

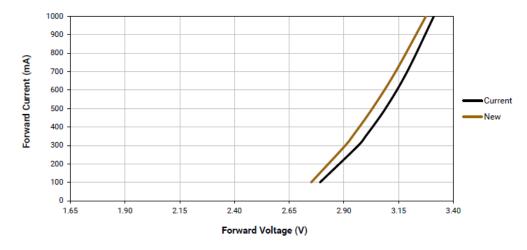


The visual appearance of the LED will change. Examples of the current and new visual appearances are shown below.


**Current Appearance** 




**New Appearance** 



The height of the XP-E2 PC Amber LED will change. Examples of the current and new dimensions are shown below. All dimensions are  $\pm$  0.13 mm.





© 2021 Cree LED. All rights reserved. Cree® and the Cree logo are registered trademarks, and the Cree LED logo is a trademark of Cree, Inc. XLamp® is a registered trademark of Cree LED.



The depth of the pocket on the tapes on which XP-E2 PC Amber LEDs are delivered will change from 2.40 mm to 2.65 mm.

## **Reason for the Change**

This change is being made to upgrade the performance of XLamp XP-E2 PC Amber LEDs utilizing our latest technology platform. Additionally, this change will result in better manufacturing flexibility and improved lead times.

## Change Impact on Form, Fit, Function, or Reliability

This change has no impact on the form, fit, or reliability of these LEDs beyond the changes listed above.

## **Key Dates**

Table 3 provides the estimated date for initial shipments of the LEDs affected by this change.

Table 3 Estimated Initial Shipment Date

Estimated Initial Ship Date: August 12, 2021

Starting on the estimated shipment date in Table 3, customers may receive LEDs with the improved characteristics. Each reel will contain only LEDs with the current performance or only LEDs with the new performance characteristics. Reels of new performance LEDs can be identified by an "A" in the twenty-first character of the bin code. The bin code is clearly identified on each packaged reel.

Customers may receive shipments containing both the current and new performance LEDs in the same shipment until Cree's inventory of the current performance LEDs is depleted. Customers purchasing through a distributor will be further delayed seeing this change until the inventory with the current performance is depleted from distributor stock.

The XP-E2 LED datasheet available at <a href="https://cree-led.com/media/documents/XLampXPE2.pdf">https://cree-led.com/media/documents/XLampXPE2.pdf</a> will be updated with changes described in this PCN on or before the Estimated Initial Ship Date in Table 3.

#### **Cree LED Contact Information**

If you have any questions regarding this PCN please contact:



#### Table 4 PCN Contact

Contact:	Cree LED Customer Service
Contact E-Mail:	xlampsales@cree-led.com
Contact Phone:	US toll free: 1-844-273-3533 Outside the US: +1 919-313-5301
Address:	CreeLED, Inc. 4400 Silicon Dr. Durham, NC 27703-8475 USA