Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions

$$\label{eq:max-ey} \begin{split} \text{Max-Eyth-Straße 1} & \cdot \text{74638 Waldenburg} \cdot \text{Germany} \\ \text{Tel.} & +49 (0) \, 79 \, 42 \, 945 - 0 \cdot \text{Fax} \\ & +49 (0) \, 79 \, 42 \, 945 - 400 \\ \text{eiSos@we-online.de} \cdot \text{www.we-online.de} \end{split}$$



Product / Process Change Notification (PCN)			
✓ Major change☐ Minor change			
PCN #:	PCN_ConUSB31_20220428	Change Category:	
Affected Series: PCN Date:	WE-ConUSB31; 632905731122 632910731131 632910731611 632910731731 632920731731 January 28, 2022	 □ Equipment / Location □ General Data □ Material □ Process ☑ Product Design □ Shipping / Packaging □ Supplier □ Software 	
Effective Date:	April 28, 2022		
Lifective Date.	Αριίι 20, 2022		
Contact:	Product Management	Data Sheet Change:	
Phone:	+49 (0) 7942 - 945 5001	⊠ Yes	□ No
Fax:	+49 (0) 7942 - 945 5179	Attachment:	
E-Mail:	pcn.eican@we-online.com	□ Yes	⊠ No
DESCRIPTION AND PURPOSE OF CHANGE:			
With the aim of an extended product applicability and to better fit the evolving standards, Würth Elektronik is changing the design of its USB-C cable range plug and overmolding.			
All products with date code 2022-01-01 or later, will be affected by this change.			
There will be no change in function, quality or reliability of the product.			


Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions

$$\label{eq:max-ey} \begin{split} \text{Max-Eyth-Straße 1} & \cdot \text{74638 Waldenburg} \cdot \text{Germany} \\ \text{Tel.} & +49 \text{ (0)} \text{ 79} \text{ 42} \text{ 945-0} \cdot \text{Fax} \text{ +49 (0)} \text{ 79} \text{ 42} \text{ 945-400} \\ \text{eiSos@we-online.de} & \cdot \text{www.we-online.de} \end{split}$$



DETAIL OF CHANGE:

The USB-C plug has been replaced by a design without dovetail shielding, with added mechanical retention to the internal PCB. To meet current customer demands, the overmolding has been straightened.

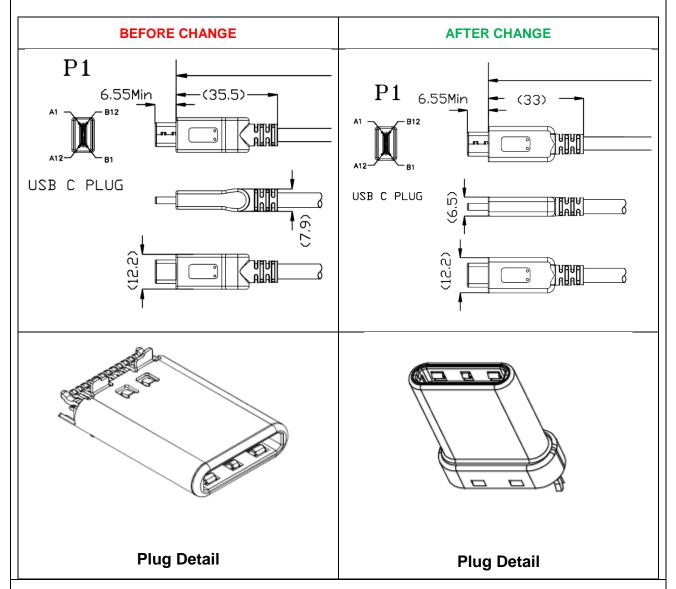

RELIABILITY / QUALIFICATION SUMMARY:

Product approval is according to the specification and is internally released by the Product Management Department.