


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: XELCOLOR
HOUSING & PLUNGER & SLIDE: MOLDED NYLON. AVAILABLE IN TEN COLORS.
CONTACT NEEDLE & SPRING: STAINLESS STEEL.
BANANA SOCKET: BRASS
SET SCREW: ALLOY STEEL
2. P/N: 9274COLOR
INSULATOR: MOLDED PVC. AVAILABLE IN TEN COLORS.
ALLIGATOR: NICKEL PLATED STEEL.
3. P/N: W-600/COLOR
18AWG 65X36 TINNED COPPER
0.144 [3.66] O.D. PVC INSULATION
AVAILABLE IN TEN COLORS.
4. PERFORMANCE
MAXIMUM CURRENT: 4.0 AMPS
MAXIMUM VOLTAGE: 5000 W.V.D.C.
MAXIMUM TEMPERATURE: 221°F (105°C)

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED

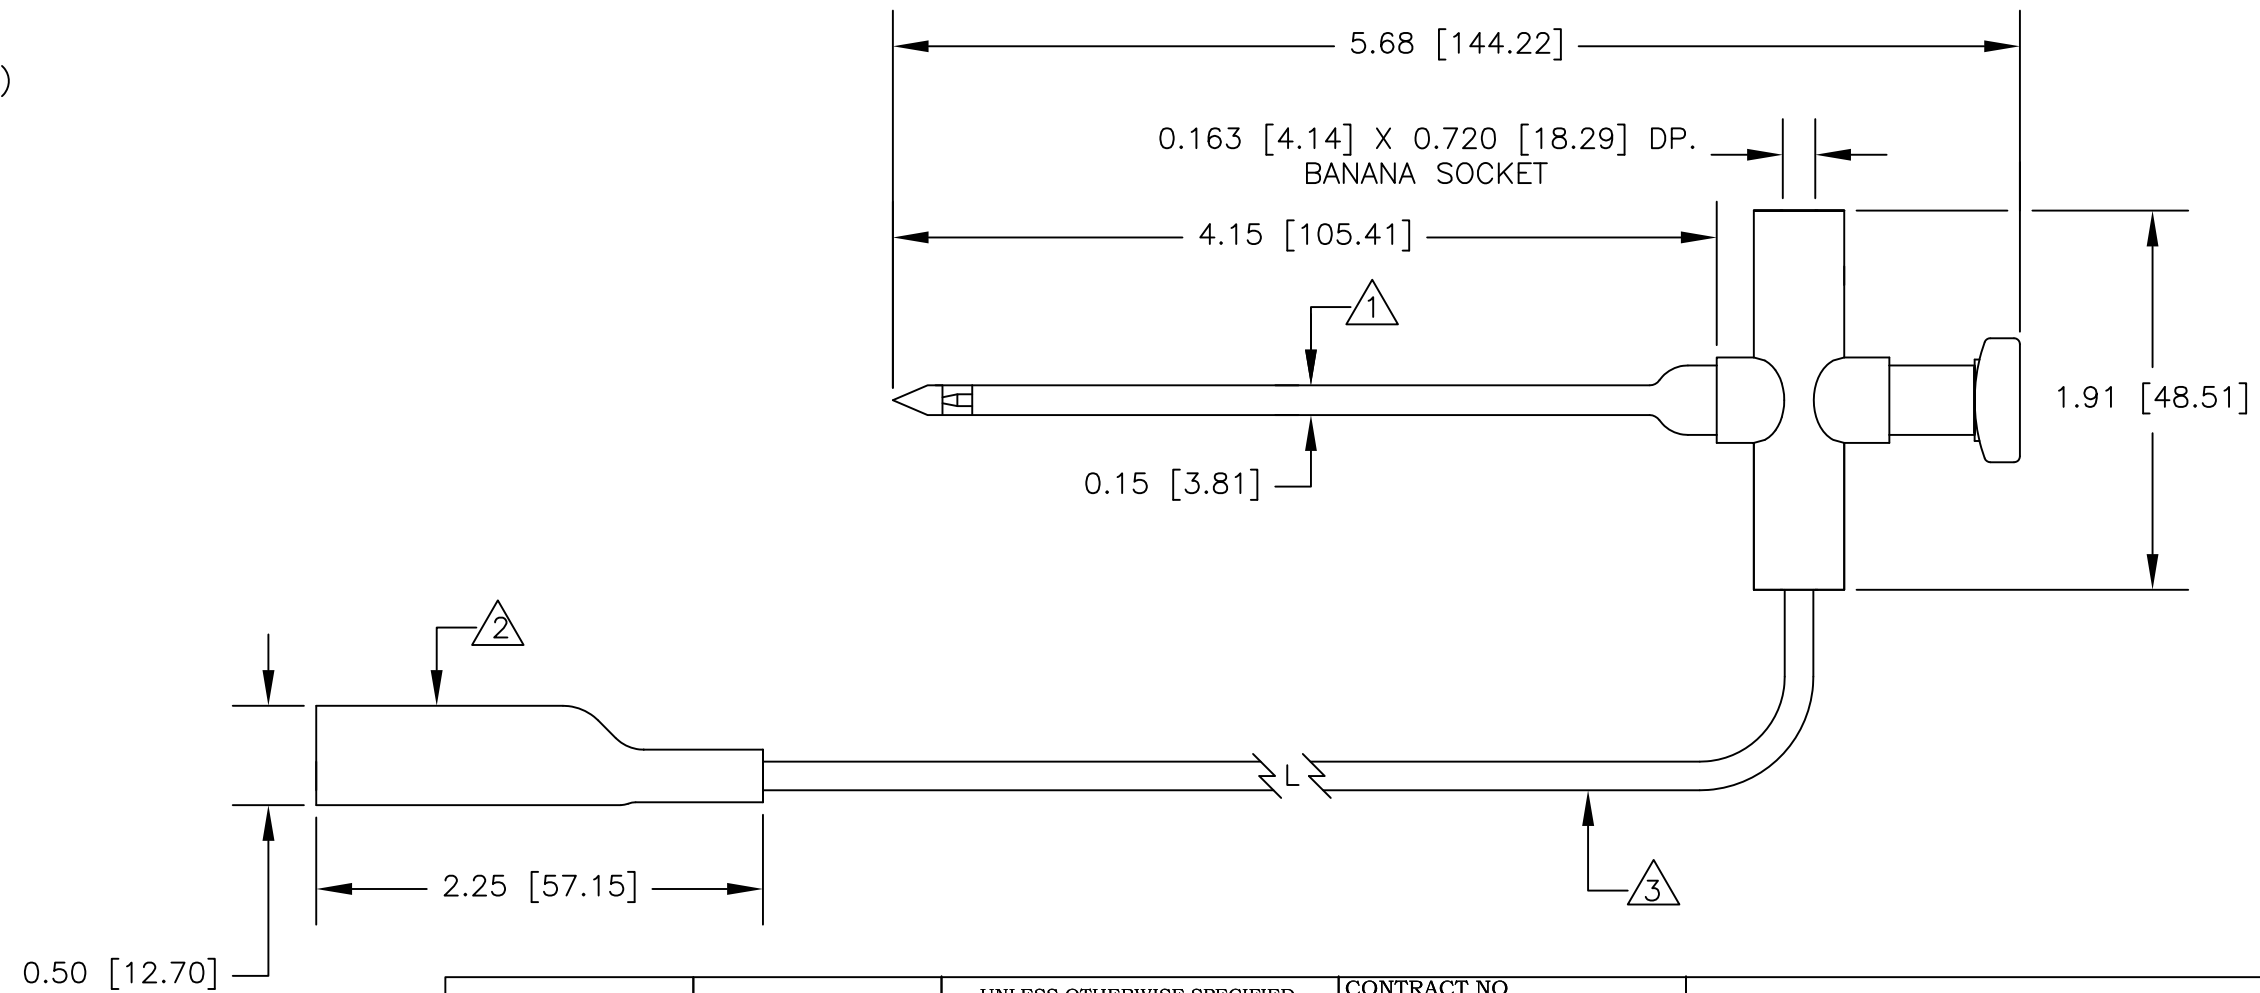

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.
			APPROVALS	DATE	
		MATERIAL SEE NOTE.	DRAWN R.L	8/16	DESCRIPTION INSULATION PIERCING MACRO-HOOK (XEL) TO STD ALLIGATOR CLIP (9274)
		FINISH SEE NOTE.	APPROVED BY		SIZE CODE IDENT NO. DRAWING NO. REV.
NEXT ASSY	USED ON				B 08505 619XEL
APPLICATION		DO NOT SCALE DRAWING			SCALE 1:1 SHEET 1 OF 1