
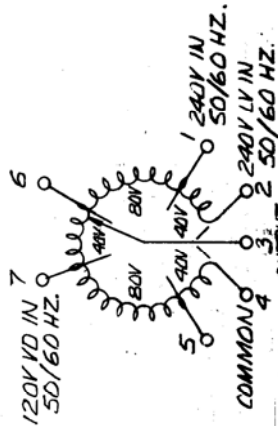
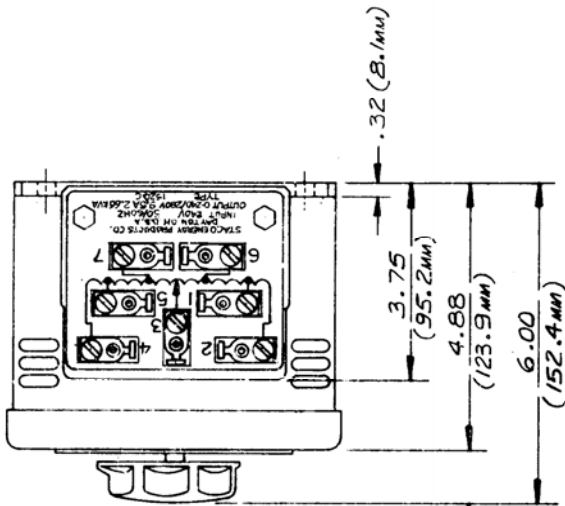


DATE	03/1-3950
REV.	
REVISED	
BY	
DATE	
APPROVAL	

2.50 (63.5 mm) DIA. KNOB  
3.75 (95.2 mm) DIA. DIAL  
GRADUATED 0-100

(4) HOLES FOR  
.31 (7.8 mm)  
MTG. BOLTS

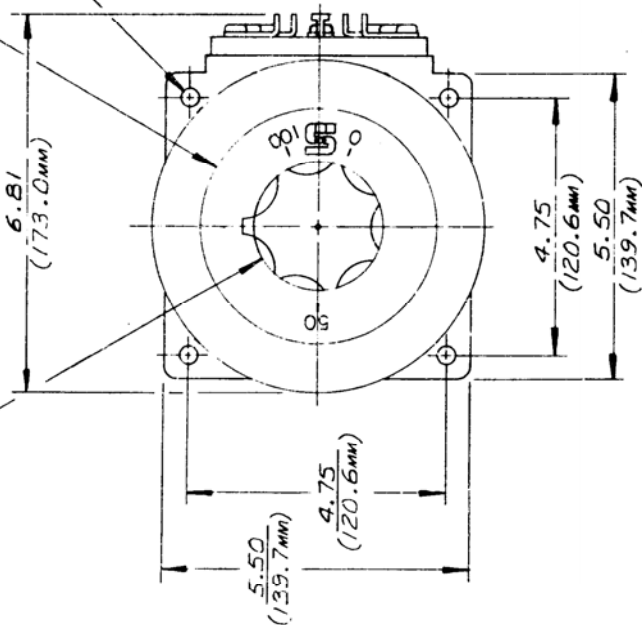

SPECIFICATIONS

WIRING	INPUT		OUTPUT			SHAFT ROTATION FOR VOLTAGE INCREASE	TERMINAL CONNECTIONS FOR INCREASING VOLTAGE AS VIEWED FROM BASE END
	VOLTS	HERTZ	CONSTANT CURRENT LOAD	CONSTANT IMPEDANCE LOAD			
SINGLE PHASE	240	50 60	MAX. AMPS 9.5	MAX. KVA 2.28	12	2.85	4-3
	120	50 60	MAX. AMPS 9.5	MAX. KVA 2.66	9.5	2.85	2-3
							4-3
							2-3
							4-3
							2-3
							4-3
							2-3

STACO  
SPECIFICATION  
CONTROL DRAWING  
VARIABLE TRANSFORMER  
TYPE: 1520C

MODEL NO.	1520C
DATE	17-25-75
REV.	C
SCALE	1:1
DRAWN BY	J. J. ROY
CHECKED BY	
DATE	
BY	
DATE	
APPROVAL	

STACO CONTROL DRAWING VARIABLE TRANSFORMER TYPE: 1520C  
 DAYTON, OHIO U.S.A.