
| PROPRIETARY INFORMATION:   | REVISION |   |          |          |  |
|--|----------|---|----------|----------|--|
| PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR<br>USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY<br>PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK,INC. | REV      | DESCRIPTION   | DATE     | APPROVED |  |
|  | Α        | INITIAL RELEASE, RFS. 18885, EM                             | 06/17/10 | BS       |  |
|  | В        | REVISE APPROVALS, ADD ENEC-VDE TO CONNECTOR, RFS. 25700, BS | 11/13/14 | HM       |  |
|  | C        | UPDATE AUSTRALIA APPROVAL TO RCM, RFS. 26429, BS            | 08/23/16 | HM       |  |
|  | D        | ADD RCM LOGO TO PLUG, RFS. 26526, BS                        | 10/31/16 | HM       |  |

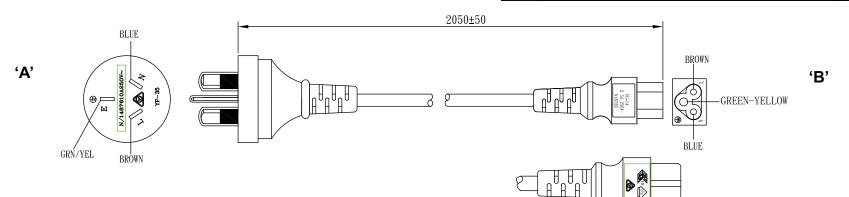

## **GENERAL SPECIFICATIONS:**

| RATING:               | 2.5A / 250V AC                              |
|-----------------------|---|
| CABLE TYPE / SIZE:    | H05VV-F, 0.75 mm <sup>2</sup> , 3 CONDUCTOR |
| TEMPERATURE RATING:   | 70°C  |
| CABLE JACKET COLOR:   | BLACK                                       |
| CONDICTORS COLOR:     | BLUE/ BRN/GRN-YEL                           |
| OVERALL LENGTH (L):   | 2050 ± 50 mm                                |
| CABLE OUTER DIAMETER: | 6.7 <u>+</u> 0.2 mm                         |
| END 'A' :             | AS3112 / 3 PRONG                            |
| END 'B' :             | IEC 320 / C5                                |
| APPROVALS PLUG:       | RCM   |
| APPROVALS CABLE:      | SAA   |
| APPROVALS CONNECTOR:  | RCM, ENEC-VDE                               |

## NOTES:

Contents of this document

prior notice

are subject to change without

MUST BE MARKED: 1.PLUG: FILE NUMBER RATING, AND RCM LOGO







| CM, ENEC-VDE<br>ID RCM LOGO |                  |         |      | <b>RELEASED</b><br>By N.Frost at 10:46 am, Nov 01, 2016                            | RoHS  |  |  |
|-----------------------------|------------------|---------|------|--|-------|--|--|
|                             | DASH<br>NO.      | PART NO | REV. | DESCRIPTION  | NOTES |  |  |
| RATING, AND RCM LOGO        | TABULATION BLOCK |         |      |  |       |  |  |
|                             |                  |         | DE   | OLERANCES:<br>CICITALS ANGULAR GlobTek, Inc. 186 Veterans Dr. Nor<br>x+/-0.1 +/-1' |       |  |  |

Tel. 201-784-1000 Fax 201.784.0111 .xxx +/- .005 www.globtek.com MILLIMETERS ANGULAR DATE: DWG TITLE: AUSTRALIAN DETACHABLE CORDSET AS3112/3 - IEC320/CS Limitation of Use: Foot Note: INIT.BY: EM +/- 1° .xx +/- 0.3 Globtek product are not authorized for use as Globtek Inc. will not be liable for the 06/17/10 .xxx +/- .013 mission critical components in life support, hazsafety and performance of these power DATE: FSCN No.: SIZE REV. ardous environment, nuclear or product if unauthorized access and repair DRAWN: NF G, CC D occurs. End user should consult the applicaaircraft applications without prior written А 06/17/10 approval from the CEO of Globtek Inc. ble UL,CSA or EN Standards for proper DATE: installation instruction. SCALE: NONE APRVD: HM PART NO: 2064262M0712(R) SHEET 1/1 06/17/10

## PACKING:

HANKING

