
PROPRIETARY INFORMATION:


PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK,INC.

| REVISION | | | | | | | | | | |
|----------|--|----------|----------|--|--|--|--|--|--|--|
| REV | DESCRIPTION | DATE | APPROVED | | | | | | | |
| A | INITIAL RELEASE, RFS. 26730, AT | 04/12/17 | MK | | | | | | | |
| В | UPDATE GEN.SPECIFICATION 'END 'A' PLUG TO RIGHT ANGLE, RFS.26747, RC | 05/03/17 | MK | | | | | | | |





A

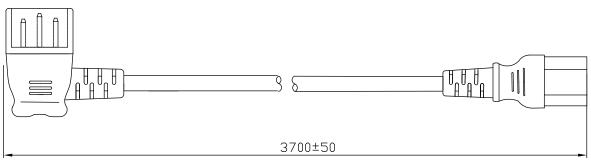

GENERAL SPECIFICATIONS:

RATING: 10A / 250V

CABLE TYPE / SIZE: SVT, 18 AWG X 3 CONDUCTORS

TEMPERATURE RATING: 105° C

CONDUCTOR COLORS: BLACK / WHITE / GREEN

CABLE JACKET COLOR: BLACK OVERALL LENGTH: 3700 ± 50 mm CABLE OUTER DIAMETER: 6.3 ± 0.1 mm

END 'A' PLUG: IEC 320 / C14 MALE, RIGHT ANGLE

END 'B': IEC 320 / C13 FEMALE

APPROVALS PLUG: UL, CSA OR cUL APPROVALS CONNECTOR: UL, CSA OR cUL UL, CSA OR cUL

PACKING:

BULK PACK

NOTES:

1. CORD, PLUG AND CONNECTOR MUST BE MARKED WITH

APPROVAL SYMBOLS OR FILE NUMBER(S).











GREEN

B

BLACK

WHITE

RELEASED

| | | DASH NO. | PART NO | REV. | | | | DESCRIPTION | | NOTES | |
|---|---|--|------------------|--|---|------------|-------------------|---|-------------------|----------------------------|-----------|
| | | | TABULATION BLOCK | | | | | | | | |
| | | | | TOLERANCES: DECIMALS ANGULAR .xx +/- 0.1 +/- 1' .xxx +/005 | | w | lobTek, Inc. | 186 Veterans Dr. Nor Tel. 201-784-1000 F | | | |
| Contents of this document are subject to change without | Foot Note: Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair t occurs. End user should consult the applica- ble UL,CSA or EN Standards for proper installation instruction. | Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc. | INIT.BY: AT | DATE: 04/12/17 | MILLIMETERS ANGULAR .xx +/- 0.3 +/- 1° .xxx +/013 | | ANGULAR +/- 1° | DWG TITLE | E: NORTH AMERICAN | MERICAN DETACHABLE CORDSET | |
| | | | DRAWN: NF | DATE: 04/12/17 | FSCN G, CC | | SIZE A | | | | REV. B |
| | | | APRVD: HM | DATE: 04/12/17 | SCAI | CALE: NONE | | PART NO: | 70114512F705L(R) | | SHEET 1/1 |