

6

5

4

3

2

1

APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/17/16	

D

D

C




C

B

B

A

A

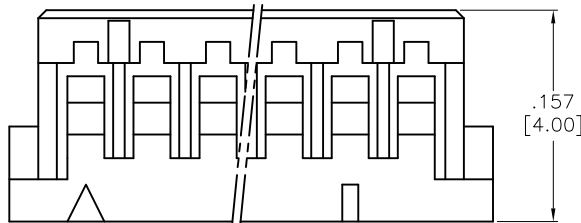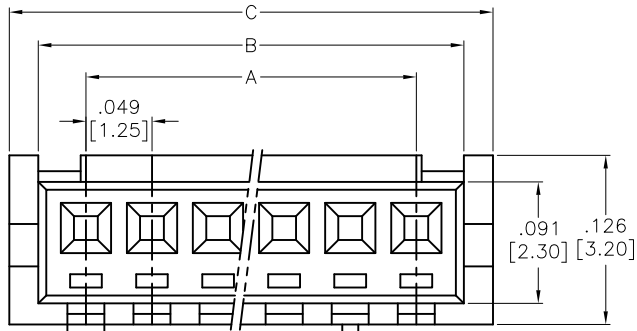

SPECIFICATIONS:

Material:
Insulator: Nylon66, rated UL 94V-0
Insulator color: Beige

Electrical:
Voltage rating: 250 VAC/DC
Current rating: 1A AC/DC
Contact resistance: 10 mohms max
Insulation resistance: 1,000Mohms min
Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:
Operating temperature: -25°C to +85°C
Environmental:
Lead free, RoHS compliant.



Positions: 2 thru 10, 11, 12, 14, 15, 20, 25, 30
A = .049 [1.25] X No. of Spaces
B = .049 [1.25] X No. of Spaces + .071 [1.80]
C = .049 [1.25] X No. of Spaces + .114 [2.90]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED			
INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

APPROVALS		DATE
DRAWN	HR	3/17/16
CHECKED	SC	3/17/16
APPROVED		

TITLE 1.25mm CRIMP HOUSING SINGLE ROW 2 THRU 30 POSITIONS, COLOR: GRAY		
SIZE X	PART NO. 125CH-C1-XX	REV. -
REF: S00015T	SCALE: NTS	SHEET 1 OF 1

6

5

4

3

2

1