
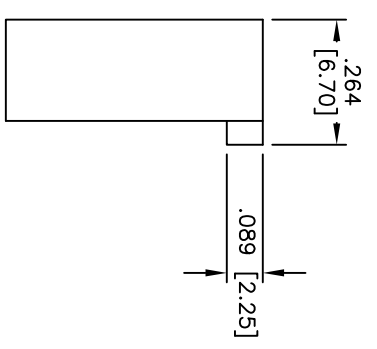
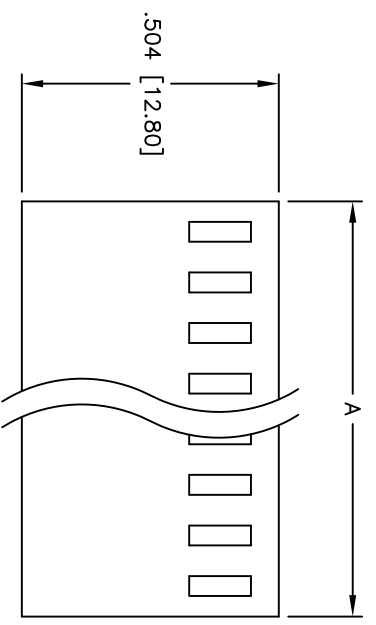


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/8/05	
A		REVISED DIM.	12/8/10	

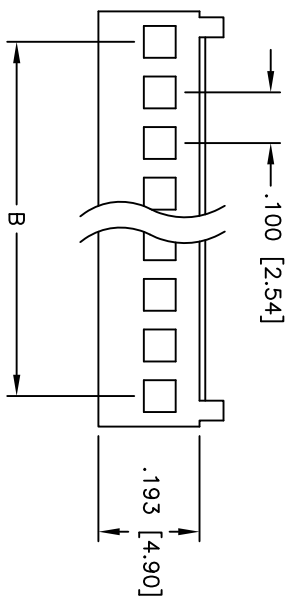

**SPECIFICATIONS:**

Material: Insulator: Nylon 66, rated UL 94V-2  
 Insulator color: White  
 Electrical: Operating voltage: 250 VAC max  
 Current rating: 3 Amps max  
 Insulation resistance: 1,000 Mohms min  
 Dielectric withstanding voltage: 1,000 VAC for 1 minute  
 Temperature Rating: Operating temperature: -25°C to +85°C  
 Environmental: Lead free, RoHS compliant

Positions: 2 thru 20  
 A = .100 [2.54] x No. of Positions + .022 [0.57]  
 B = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLDS
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010

APPROVALS

DATE
4/8/05

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

**.100 [2.54] WIRE HOUSING**

SIZE	PART NO.	REV.
X	MTS-XX	A

SCALE: MTS SHEET 1 OF 1



6 5 4 3 2 1