


# AK1E

## 1000 A Transient voltage suppressor



### Product features

- Bi-directional
- Low slope resistance
- Very low clamping voltage
- Sharp breakdown voltage
- Glass passivated junction
- Snapback technology for superior clamping factor
- High temperature wave soldering: +265 °C /10 s at terminal


### Applications

- Consumer electronics
- Telecommunications
- Computing and servers
- Appliances
- Industrial automation
- Vac line protection


### Environmental compliance and general specifications



### Ordering part number

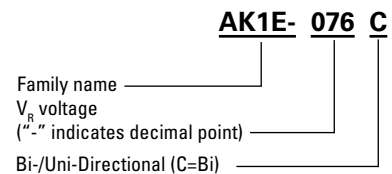

### PIN configuration

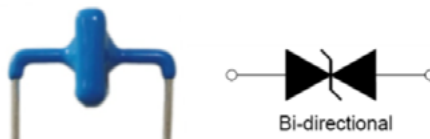


**Absolute maximum ratings**

(+25 °C, RH=45%-75%, unless otherwise noted)


Parameter	Symbol	Value	Unit
Peak current rating per 8/20µs IEC 61000-4-5	$I_{PP}$	1	kA
Operating junction temperature range	$T_J$	-55 to +125	°C
Storage temperature range	$T_{STG}$	-55 to +150	°C

**Mechanical parameters- mm**

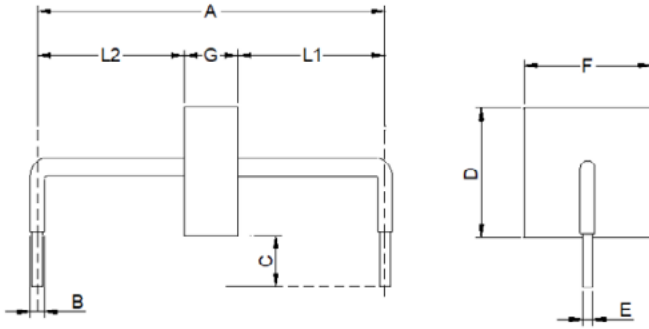

	Inches	Millimeters
A	0.951 ± 0.039	24.15 ± 1.00
B	0.094 ± 0.024	2.40 ± 0.60
C	0.236 ± 0.039	6.00 ± 1.00
D	0.570 max	14.48 max
E	0.050 ± 0.002	1.27 ± 0.05
F	0.500 max	12.70 max
G	076C	0.169 ± 0.047
	380C to 430C	0.287 ± 0.047
$L_1/L_2$	L1=L2 tolerance ± 0.047 inch (± 1.20 mm)	

**Part marking**



Side view

**Part number:**  
AK1E-076C



Top view

**Part number:**  
AK1E-380C  
AK1E-430C

**Packaging information (mm)**


Bulk: 56 parts per box

**Electrical characteristics (+25 °C)**


Part number	$V_R$ (V)	$V_{BR} @ I_T$ min (V)	max (V)	$I_T$ (mA)	$I_R @ V_R$ (µA)	$V_C @ I_{PP}$ (V)	$I_{PP}$ (A)
AK1E-076C	76	85	95	10	10	140	1000
AK1E-380C	380	401	443	10	10	520	1000
AK1E-430C	430	440	490	10	10	625	1000

**Ratings and V-I characteristic curves** (+25 °C unless otherwise noted)

**V- I curve characteristics (Bi-directional)**

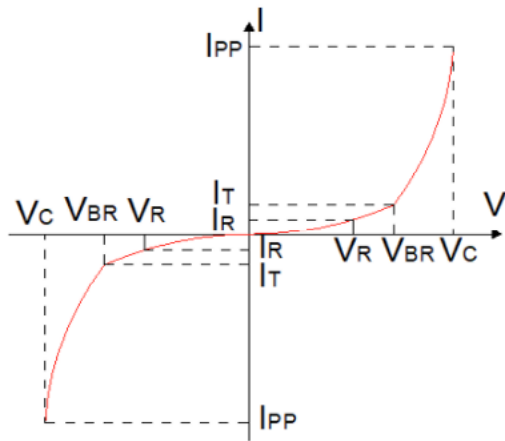

**Typical  $V_{BR}$  vs junction temperature**

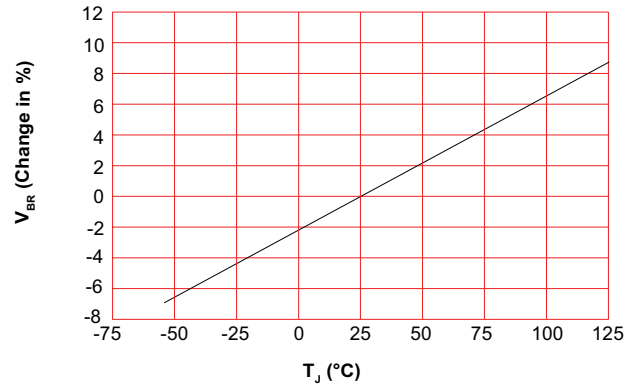

Surge waveform: 8/20  $\mu$ s

$V_R$ : Stand-off voltage – Maximum voltage that can be applied


$V_{BR}$ : Breakdown voltage

$V_C$ : Clamping voltage – Peak voltage measured across the suppressor at a specified  $I_{PP}$


$I_R$ : Reverse leakage current

$I_T$ : Test current


**Pulse waveform**

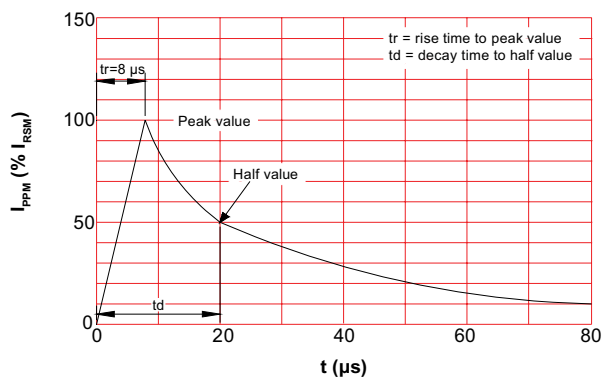

**Pulse derating curve**

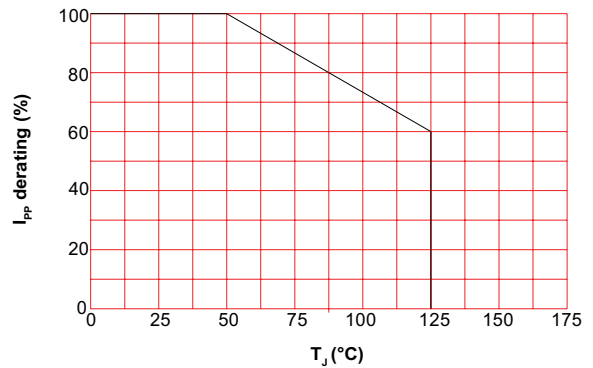

### Wave solder profile

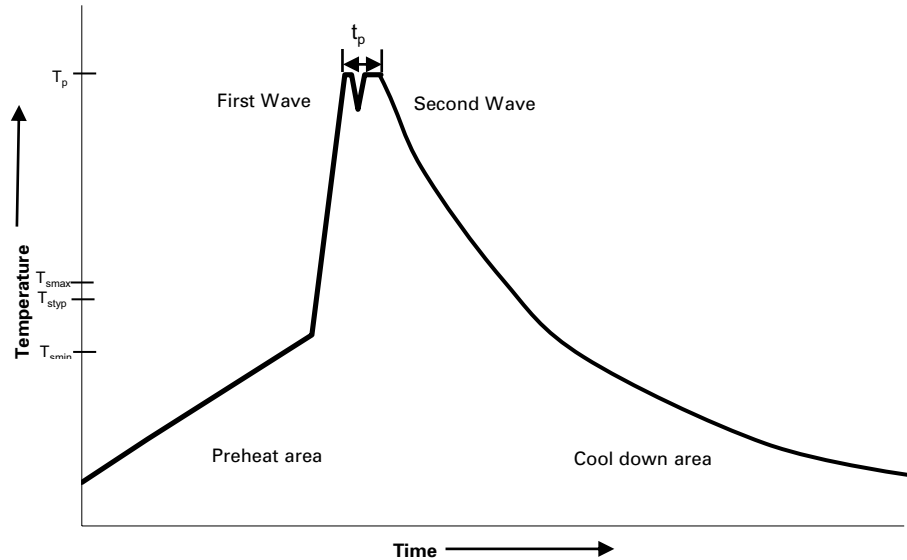

### Reference EN 61760-1:2006

Profile feature	Standard SnPb solder	Lead (Pb) free solder
Preheat		
• Temperature min. ( $T_{smin}$ )	100 °C	100 °C
• Temperature typ. ( $T_{styp}$ )	120 °C	120 °C
• Temperature max. ( $T_{smax}$ )	130 °C	130 °C
• Time ( $T_{smin}$ to $T_{smax}$ ) ( $t_s$ )	70 seconds	70 seconds
$\Delta$ preheat to max Temperature	150 °C max.	150 °C max.
Peak temperature ( $T_p$ )*	235 °C – 260 °C	250 °C – 265 °C
Time at peak temperature ( $t_p$ )	10 seconds max 5 seconds max each wave	10 seconds max 5 seconds max each wave
Ramp-down rate	~ 2 K/s min ~3.5 K/s typ ~5 K/s max	~ 2 K/s min ~3.5 K/s typ ~5 K/s max
Time 25 °C to 25 °C	4 minutes	4 minutes

### Manual solder

+350 °C (4-5 seconds by soldering iron), generally manual/hand soldering is not recommended.

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

**Eaton**  
**Electronics Division**  
1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
Eaton.com/electronics

© 2020 Eaton  
All Rights Reserved  
Printed in USA  
Publication No. 11208 BU-MC20186  
November 2020

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Follow us on social media to get the latest product and support information.

