



		1	
Part Number:	0204 1	DRAWN	4/16/2010
CNADIA		CJ	4/16/2019
21412.Tr	0204-1	CHECKED	5/16/2019
		C.H.	3/10/2019
Description:	c Charler	APPROVED	5/16/2019
Dynamic	Speaker	C.E.	3/10/2019

This document contains data proprietary to DB Unlimited. Any use or reproduction, in any form, without prior written permission of DB Unlimited is prohibited. All terms and conditions can be found at www.dbunlimitedco.com


Top View

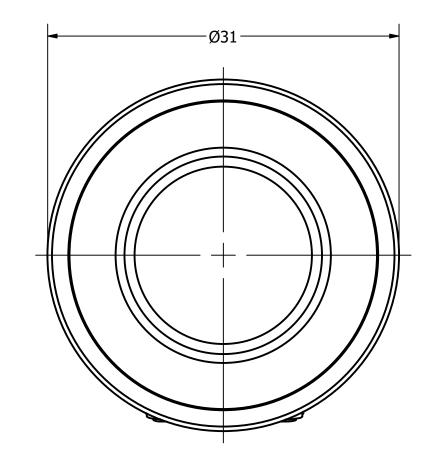

Side View

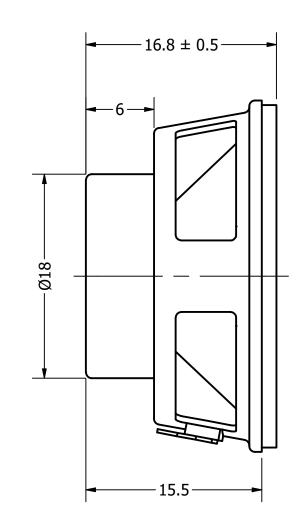

Bottom View

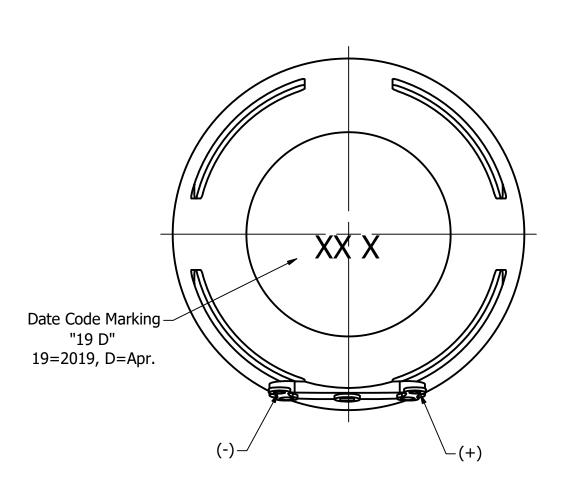

Items	Specifications	Conditions						
Sound Pressure Level	97	dB (@ 10cm), Avg.						
Resonant Frequency	240	Hz						
Frequency Range	240 ~ 10,000	Hz		REVISION HISTORY				
Nominal Power	2	W	REV	DESCRIPTION	DATE	APPROVED		
Max. Power	2.5	W		Released from Engineering	5/16/2019	C.E.		
Impedance	4	Ω		NOTES				
Cone Material	Mylar			1) All dimensions are in mm unless otherwise noted				
Mount Type	Flush Mount			2) All tolerances are ± 0.3 mm unless otherwise noted				
Storage Temperature	-20 ~ +55	°C		3) All parts meet RoHS				
Operating Temperature	-20 ~ +55	°C		4) Subject to change or redrawn without notice				

4 **A** 2