



		1	
Part Number:		DRAWN	11/0/2010
CDEAG	1041	CI	11/9/2018
SP520	10 <del>4</del> -1	CHECKED	11/0/2019
		C.H.	11/9/2018
Description:	Chapkar	APPROVED	11/0/2019
Dynamic	Speaker	C.E.	11/9/2018

This document contains data proprietary to DB Unlimited. Any use or reproduction, in any form, without prior written permission of DB Unlimited is prohibited. All terms and conditions can be found at www.dbunlimitedco.com


## Top View

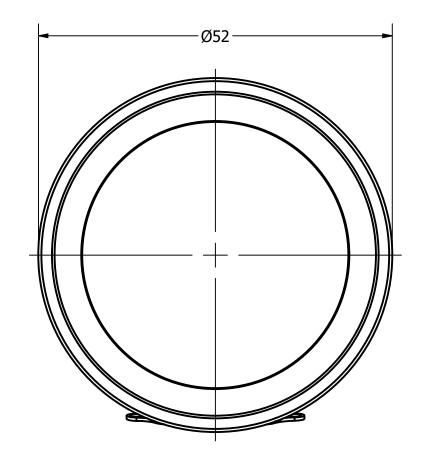

## Side View

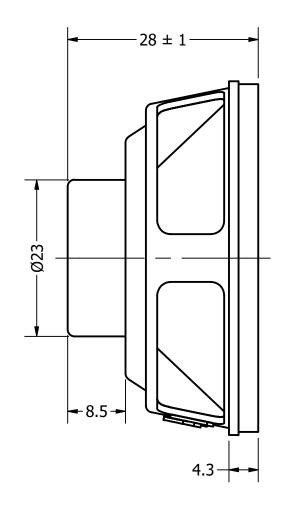

## **Bottom View**

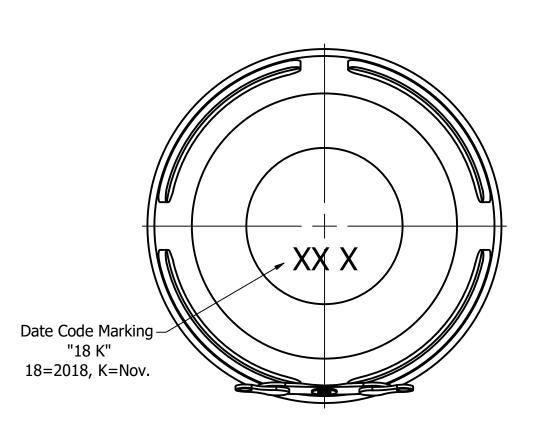

Items	Specifications	Conditions					
Sound Pressure Level	99	dB (@ 10cm), Avg.					
Resonant Frequency	150	Hz					
Frequency Range	150 ~ 20,000	Hz					
Nominal Power	5	W	REVISION HISTORY				
Max. Power	6	W	REV	DESCRIPTION	DATE	APPROVED	
Impedance	4	Ω		Released from Engineering	11/9/2018	C.E.	
Cone Material	Paper		NOTES				
Mount Type	Flush Mount		1) All dimensions are in mm unless otherwise noted				
IP Rating	IP65		2) All tolerances are ± 0.5 mm unless otherwise noted				
Storage Temperature	-40 ~ +85	°C	3) All parts meet RoHS				
Operating Temperature	-30 ~ +75	°C	4) Subject to change or redrawn without notice				
Weight	34	g					