


			1		
	Part Number:		DRAWN	4/10/2021	
Des	CM20	1000 1	CJ	4/10/2021	
	SW301	1008-1	CHECKED	4/22/2021	
			P.D.		
	Waterproof Speaker	of Capalian	APPROVED	4/22/2021	
	waterpro	оог Ѕреакег	J.S.		


This document contains data proprietary to DB Unlimited. Any use or reproduction, in any form, without prior written permission of DB Unlimited is prohibited. All terms and conditions can be found at www.dbunlimitedco.com

**Bottom View** 

## Top View

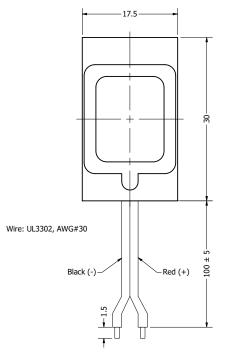

## Side View

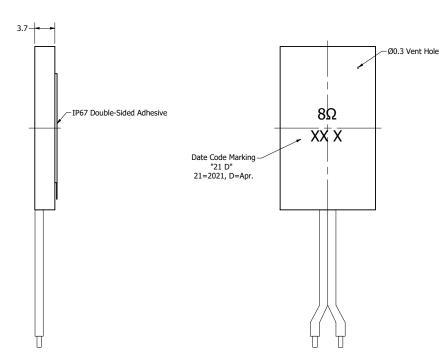

Items	Specifications	Conditions						
Sound Pressure Level	95	dB (@ 1W/10cm)						
Resonant Frequency	1,050	Hz						
Frequency Range	1,050 ~ 20,000	Hz						
Nominal Power	1	W	REVISION HISTORY					
Max. Power	1.5	W	REV	DESCRIPTION	DATE	APPROVED		
Impedance	8	Ω		Released from Engineering	4/22/2021	J.S.		
Cone Material	PE		NOTES					
Mount Type	Flush Mount			1) All dimensions are in mm unless otherwise noted				
IP Rating	IP67			2) All tolerances are ± 0.2 mm unless otherwise noted				
Storage Temperature	-20 ~ +60	°C	3) All parts meet RoHS					
Operating Temperature	-20 ~ +60	°C	4) Subject to change or redrawn without notice					
		1		2				