



Elastische Einpresszone / compliant pressfit zone
 Isolierwerkstoff / housing material : PBT GF30
 Bauart 7 / type 7
 Anforderungsstufe 2 = 400 Steckzyklen / performance class 2 = 400 mating cycles
 Fehlende Masse und Angaben nach IEC 60 603-2 / DIN EN 60 603-2
 Missing information and dimensions per IEC 60 603-2 / DIN EN 60 603-2
 Schichtaufbau im metallisierten Loch siehe Zeichnung 164062/Nr.6
 diameter of drilled hole see drawing 164062/No.6
 1) $\phi 1,0 \pm 0,09$ Durchmesser des metallisierten Loches
 $\phi 1,0 \pm 0,09$ Diameter of finished plated-through hole
 $\phi 1,15 \pm 0,025$ Bohrungsdurchmesser des Loches
 $\phi 1,15 \pm 0,025$ Diameter of drilled hole

Bestückungsplan / contact layout ■ bestückt / assembled

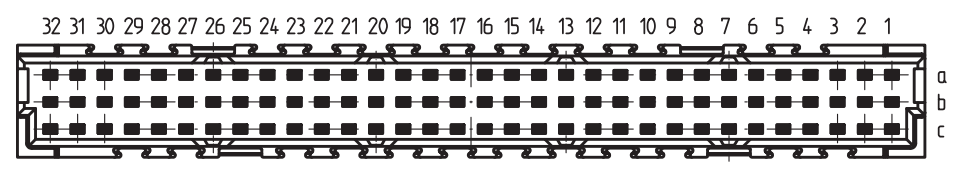

Leiterplatten-Lochbild / PCB drillhole pattern

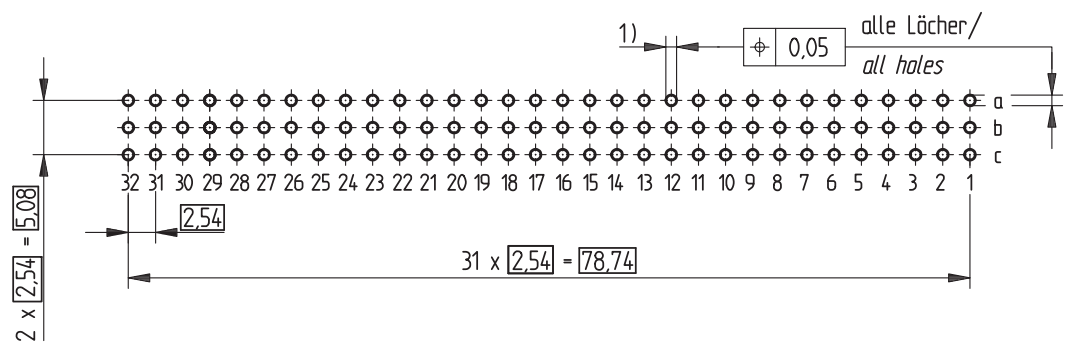

ohne Flansch
 without flange

Information: All rights reserved. Only for information. To insure that this is the latest version of this drawing, please contact one of the ERNI companies before using.	Tolerances	 All Dimensions in mm	Scale	2:1
	Subject to modification without prior notice. Drawing will not be updated.		Designation	Federleiste C 96 EE Fem. Connector C 96 Pressfit
 www.ERNI.com	254121		I	
Index	Date	H:00062863.SZA	STVC	

Consider protection memo from DIN 34