

APAKN2504-S2448-T

25.0 x 25.0 x 4.0mm RoHS/RoHS II Compliant

MSL=1

FEATURES

- Gain of 7dBi
- 2.4GHz band
- 100 MHz bandwidth
- Surface mount patch antenna
- 25.0 x 25.0 x 4.0mm form factor

APPLICATIONS


- Wifi
- Bluetooth
- ZigBee
- ISM applications

ELECTRICAL SPECIFICATIONS

Parameters	min	Тур.	Max.	Units	Note
Receiving Frequency Range	2412		2484	MHz	(On a 70*70mm Ground Plane)
Bandwidth	100			MHz	(Return loss ≤-10dB)
Return Loss			-10	dB	(@ CF)
Gain		7.0		dBi	(Peak gain)
Polarization Model		Linear			
Impedance		50		Ω	
Frequency Temperature Coefficient			20	ppm/°C	

^(*) Application environment, including size of the ground plane, proximity to adjacent components, etc., will affect stated performance. Fine tuning might be required when installed on end-customer's PCB. Abracon offers Antenna Optimization Service, please contact Abracon.

RETURNLOSSCHARACTERISTIC

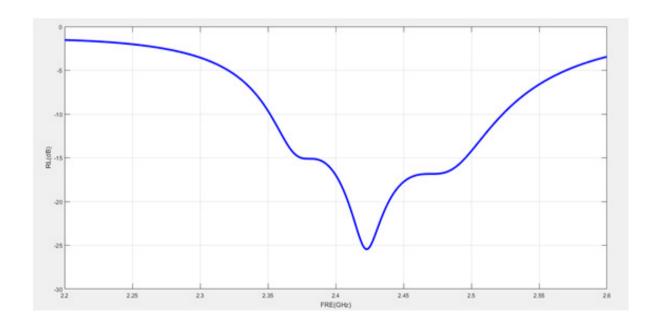



lden Creek Ln Spicewood TX 78669

REVISED: 03.01.2021

ABRACON IS

ABRACON IS ISO9001-2015 CERTIFIED




APAKN2504-S2448-T

25.0 x 25.0 x 4.0mm RoHS/RoHS II Compliant


MSL=1

RADIATION PATTERN (3D)

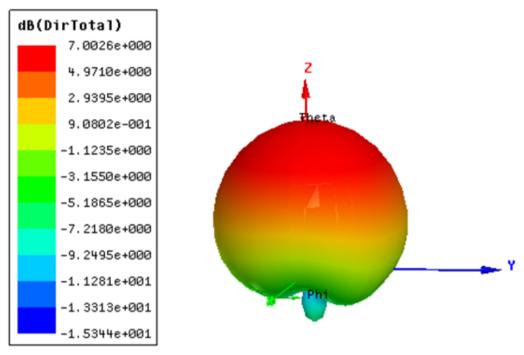

Radiation pattern@ 2.45GHz

OUTLINE DIMENSIONS

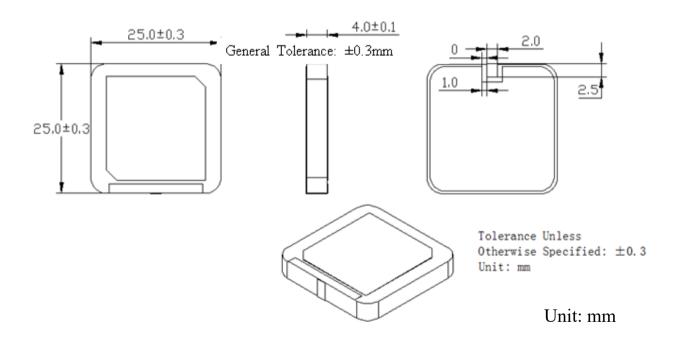



REVISED: 03.01.2021




APAKN2504-S2448-T

25.0 x 25.0 x 4.0mm RoHS/RoHS II Compliant


MSL=1

LAND PATTERN

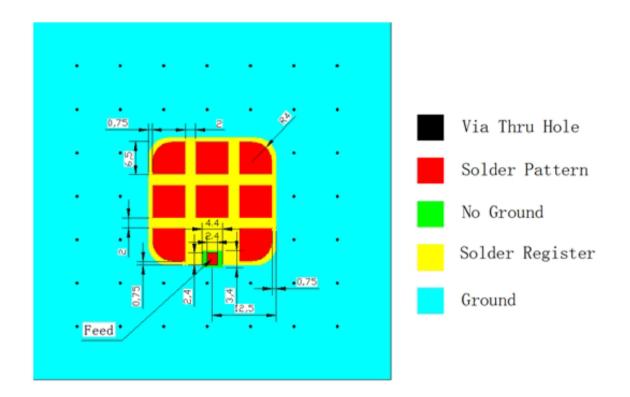

RECOMMENDED REFLOW SOLDERING PROFILE

Solder Paste: Sn/Ag/Cu: 96.5/3.0/0.5 Recommended reflow condition:

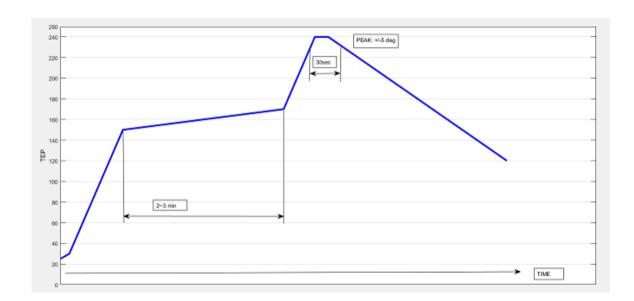



REVISED: 03.01.2021



APAKN2504-S2448-T

25.0 x 25.0 x 4.0mm RoHS/RoHS II Compliant

MSL=1

PACKAGING

Package is made of corrugated paper with thickness of 0.8cm. The carton has 4 inner boxes; each box has 1 vacuum bag.

Quantity:

Per package base : 50 elements
Per vacuum bag : 5 package bases
Per inner box : 1 vacuum bag
Per package : 4 inner boxes

No of pieces of elements: 1000 Gross weight: 12Kg

Carton dimensions : 37*37*17cm



REVISED: 03.01.2021