




Pin	Function							
1	Tristate Enable/Disable							
2	GND/Case							
3	Output							
4	Vdd							

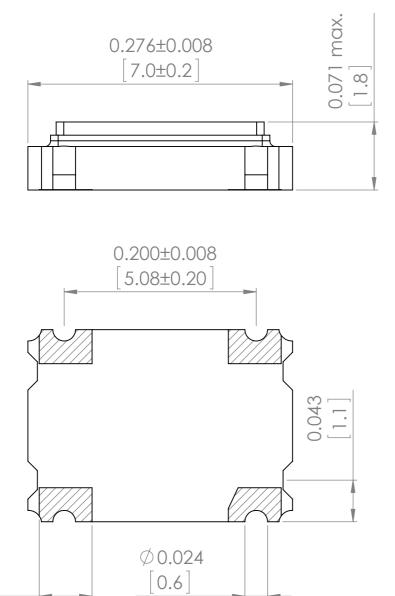

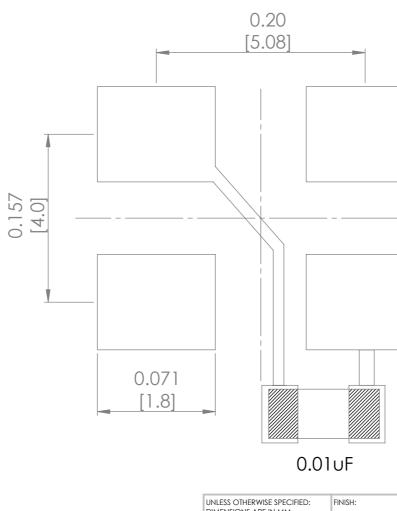

**Recommended Land Pattern** 

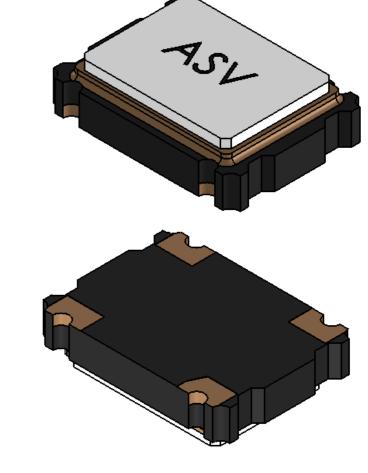

Note: It is recommended to use an approximately 0.01 uF bypass capacitor between PIN 2 and 4.

0.055

[1.4]

UNLESS OTHERWISE SPECIFIED: FINISH: DIMENSIONS ARE IN MM SURFACE FINISH:			DEBUR AND BREAK SHARP			DO NO	OT SCALE DRAWING	REVISION	-			
TOLERAN	CES: EAR:						EDGES	ABRACON				
	NAME	SIGN	ATURE	DATE						<b>CORPORA</b>	MOL	
DRAWN SAAZVAT							20222 Fanaranza Banaha Canta margarita California 02600					
CHK'D	XXXXXX							30332 Esperanza, Rancho Santa margarita, California 92688				
APPV'D	APPV'D				TITLE: Crystal							
MFG									Ci	ysiai		
Q.A					MATERIAL:  WEIGHT:			DWG NO.	ASV		А3	
										V		
								SCALE:4:1		SHEET 1 OF 1	-	

0.079 [2.0]