
PAR	RFB-1133			
REV	DESCRIPTION	DWN	DATE	APPROVED
Ε	UPDATED DWG FORMAT	CZS	3/22/21	JDMc

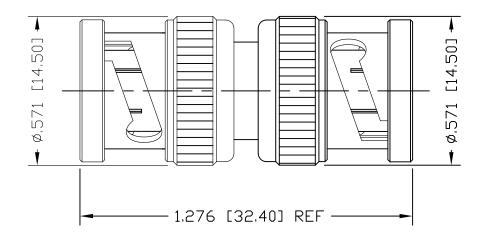

SPECIFICATIONS:

IMPEDANCE: 50 OHMS WORKING VOLTAGE: 500 VRMS @ SEA LEVEL FREQUENCY RANGE: 0-4 GHz

INTERFACE PER MIL-STD-348A, SECTION 301.1

8	SHELL	2	BRASS	NICKEL	ARE REF
7	WASHER	2	BRASS	NICKEL	
6	SPRING	2	SK-5	NICKEL	UNLESS OTH
5	SPLIT LOCK WASHER	2	SK-5	NICKEL	DIMENSION
4	GASKET	2	S.I. RUBBER	RED	AND [N
3	DIELECTRIC	2	PTFE	NATURAL	DRAWN C. ZUÑIGA
2	PIN	1	BRASS	GOLD	CHECKED
1	BODY	1	BRASS	NICKEL	
#	DESCRIPTION	QTY	MATERIAL	FINISH	ORJ DRAWN C. JONES

CUSTOMER OUTLINE DRAWING

ALL DIMENSIONS EFERENCE ONLY

THERWISE SPECIFIED: ONS ARE IN INCHES

AND [MILLIMI	LILINOJ	RF INDUSTRIES, ANY	
in Zuñiga	03/22/21	UNAUTHORIZED USE OF TH DRAWING IS EXPRESSLY	
CKED		PROHIBITED WITHOUT WRITT PERMISSION FROM RF INDUSTRIES, ANY VIOLATION	
DRAWN JONES	8/27/91	PUNISHABLE UNDER U.S. COPYRIGHT LAWS.	



I GONNOGCIOFS (858) 549-6340 DIVISION OF RF INDUSTRIES, LTD. (858) 549-6345 FAX

RFINDUSTRIES.COM 7610 MIRAMAR RD. SAN DIEGO, CA 92126

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING CONTAINS
INFORMATION PROPRIETARY TO TEN

BNC PLUG TO BNC PLUG ADAPTER\UG491B/U

CABLE GROUP DWG #

RFB-1133

REVISION

FORMAT SCALE CONTROL # NTS

000000

SHEET 1 OF 1