


P1: M-043

P2: M-044

Customer No.: No.:1

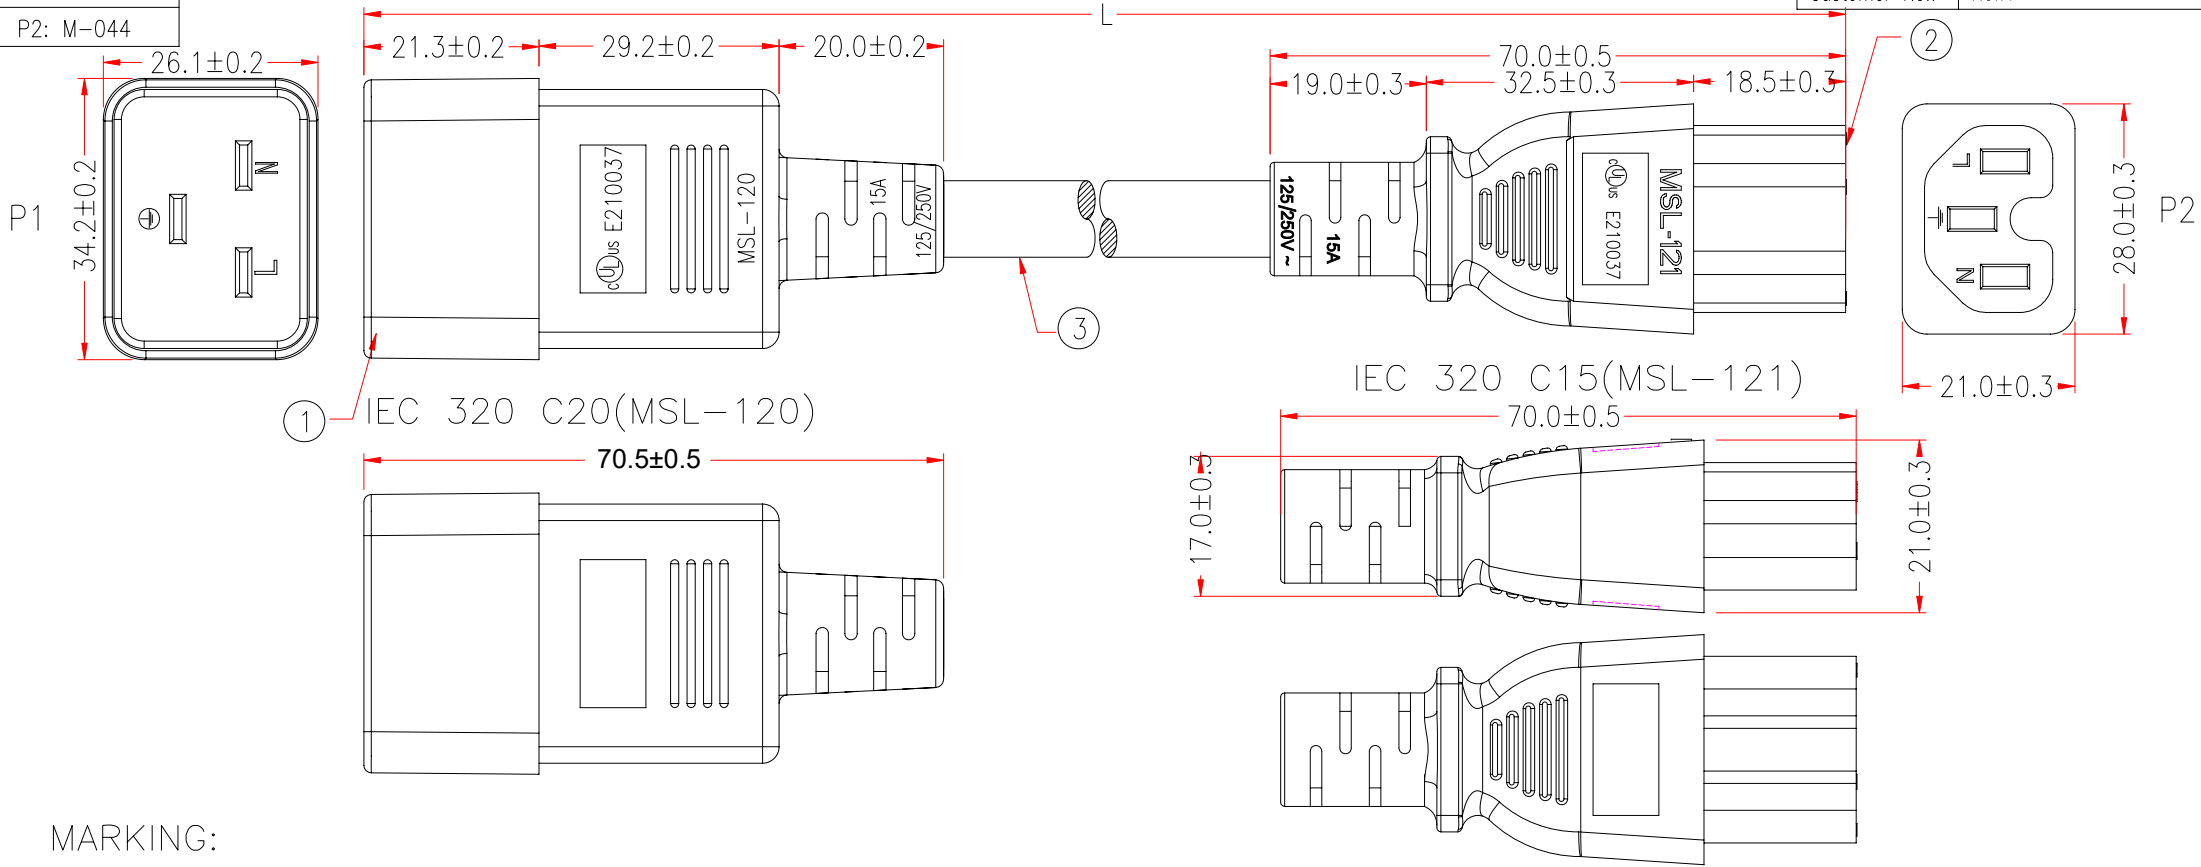

MARKING:

(UL) SJT 3/C 14AWG(2.08MM²) VW-1 105°C 300V E204978 CSA

SJT 3/C 2.08MM²(14AWG) FT2 105°C 300V 204790 MSL

P1,P2: cULus E210037

*NOTE: All relevant materials are complied with RoHS directive .

120121B2F14A(FP239-00)

P1	P2		
L	L	BLACK	
N	N	WHITE	
E	E	GREEN	

No.	DESCRIPTION	Q'TY	Supplier
3	UL SJT 14AWG x 3C, OD 9.3mm, JACKET BLACK, DRAWING No. EPSVT011403C-085	Xmm	M304
2	MOLDED PVC 35P, COLOR BLACK		M304
	BRACKET:9745C	1	M257
	TERMINAL:98745L	3	M257
1	MOLDED PVC 35P, COLOR BLACK		M304
	BRACKET: YST-038	1	M767
	TERMINAL: 97607BS-1	1	M257
	TERMINAL: 97606BS-1	2	M257

APPROVED					Unless Otherwise SPEC. Tolerances: 0. ±0.5 .0 ±0.3 .00 ±0.1
CHECKED	HU	05/AUG/16	DRAWN NAME	POWER SUPPLY CORDS & CORDS SETS	
DRAWING	LIU	05/AUG/16	PRODUCT NO.	PWCD-C15C20-15A-XXF-YYY	

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm

UNIT: inches