



# P-DUKE POWER


## UDS03 • UDH03 Series

DC-DC Converter  
Up to 3 Watts

**3**  
YEARS  
WARRANTY

ROHS  
COMPLIANT

REACH  
COMPLIANT

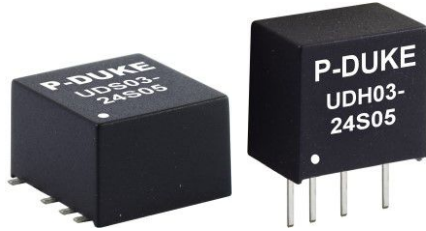

Automation



Datacom



IPC



Industry



Measurement



Telecom



Automobile



Boat



Charger



Medical



PV



Railway

CE UK  
CA

**1600**  
VDC  
Isolation  
Voltage

**2 : 1**  
Input  
Range

**NO**  
Min. Load  
Required

**SCP**

### PART NUMBER STRUCTURE

| Series Name           | Input Voltage (VDC) | Output Quantity  | Output Voltage (VDC) |
|-----------------------|---------------------|------------------|----------------------|
| <b>UDS</b> : SMD type | <b>05</b> :4.5~13.2 | <b>S</b> :Single | <b>3P3</b> :3.3      |
| <b>UDH</b> : SIP type | <b>12</b> :9~18     |                  | <b>05</b> :5         |
|                       | <b>24</b> :18~36    |                  | <b>09</b> :9         |
|                       | <b>48</b> :36~75    |                  | <b>12</b> :12        |
|                       |                     |                  | <b>15</b> :15        |
|                       |                     |                  | <b>24</b> :24        |
|                       |                     | <b>D</b> : Dual  | <b>05</b> :± 5       |
|                       |                     |                  | <b>12</b> :±12       |
|                       |                     |                  | <b>15</b> :±15       |

**TECHNICAL SPECIFICATION** All specifications are typical at nominal input, full load and 25°C unless otherwise noted

| Model Number    | Input Range | Output Voltage | Output Current @Full Load | Input Current @No Load | Efficiency | Maximum Capacitor Load |
|-----------------|-------------|----------------|---------------------------|------------------------|------------|------------------------|
|                 | VDC         | VDC            | mA                        | mA                     | %          | μF                     |
| UDS(H)03-05S3P3 | 4.5 ~ 13.2  | 3.3            | 700                       | 65                     | 75         | 4400                   |
| UDS(H)03-05S05  | 4.5 ~ 13.2  | 5              | 600                       | 65                     | 78         | 2200                   |
| UDS(H)03-05S09  | 4.5 ~ 13.2  | 9              | 333                       | 65                     | 79         | 1300                   |
| UDS(H)03-05S12  | 4.5 ~ 13.2  | 12             | 250                       | 75                     | 82         | 1000                   |
| UDS(H)03-05S15  | 4.5 ~ 13.2  | 15             | 200                       | 75                     | 80         | 820                    |
| UDS(H)03-05S24  | 4.5 ~ 13.2  | 24             | 125                       | 75                     | 80         | 330                    |
| UDS(H)03-05D05  | 4.5 ~ 13.2  | ±5             | ±300                      | 75                     | 77         | ±1200                  |
| UDS(H)03-05D12  | 4.5 ~ 13.2  | ±12            | ±125                      | 75                     | 80         | ±520                   |
| UDS(H)03-05D15  | 4.5 ~ 13.2  | ±15            | ±100                      | 75                     | 80         | ±440                   |
| UDS(H)03-12S3P3 | 9 ~ 18      | 3.3            | 700                       | 35                     | 76         | 4400                   |
| UDS(H)03-12S05  | 9 ~ 18      | 5              | 600                       | 35                     | 79         | 2200                   |
| UDS(H)03-12S09  | 9 ~ 18      | 9              | 333                       | 35                     | 80         | 1300                   |
| UDS(H)03-12S12  | 9 ~ 18      | 12             | 250                       | 40                     | 84         | 1000                   |
| UDS(H)03-12S15  | 9 ~ 18      | 15             | 200                       | 40                     | 83         | 820                    |
| UDS(H)03-12S24  | 9 ~ 18      | 24             | 125                       | 40                     | 82         | 330                    |
| UDS(H)03-12D05  | 9 ~ 18      | ±5             | ±300                      | 40                     | 78         | ±1200                  |
| UDS(H)03-12D12  | 9 ~ 18      | ±12            | ±125                      | 40                     | 82         | ±520                   |
| UDS(H)03-12D15  | 9 ~ 18      | ±15            | ±100                      | 40                     | 81         | ±440                   |
| UDS(H)03-24S3P3 | 18 ~ 36     | 3.3            | 700                       | 18                     | 76         | 4400                   |
| UDS(H)03-24S05  | 18 ~ 36     | 5              | 600                       | 18                     | 78         | 2200                   |
| UDS(H)03-24S09  | 18 ~ 36     | 9              | 333                       | 18                     | 80         | 1300                   |
| UDS(H)03-24S12  | 18 ~ 36     | 12             | 250                       | 18                     | 84         | 1000                   |
| UDS(H)03-24S15  | 18 ~ 36     | 15             | 200                       | 18                     | 84         | 820                    |
| UDS(H)03-24S24  | 18 ~ 36     | 24             | 125                       | 20                     | 83         | 330                    |
| UDS(H)03-24D05  | 18 ~ 36     | ±5             | ±300                      | 20                     | 79         | ±1200                  |
| UDS(H)03-24D12  | 18 ~ 36     | ±12            | ±125                      | 20                     | 83         | ±520                   |
| UDS(H)03-24D15  | 18 ~ 36     | ±15            | ±100                      | 20                     | 82         | ±440                   |
| UDS(H)03-48S3P3 | 36 ~ 75     | 3.3            | 700                       | 10                     | 75         | 4400                   |
| UDS(H)03-48S05  | 36 ~ 75     | 5              | 600                       | 10                     | 79         | 2200                   |
| UDS(H)03-48S09  | 36 ~ 75     | 9              | 333                       | 10                     | 80         | 1300                   |
| UDS(H)03-48S12  | 36 ~ 75     | 12             | 250                       | 12                     | 83         | 1000                   |
| UDS(H)03-48S15  | 36 ~ 75     | 15             | 200                       | 12                     | 83         | 820                    |
| UDS(H)03-48S24  | 36 ~ 75     | 24             | 125                       | 12                     | 82         | 330                    |
| UDS(H)03-48D05  | 36 ~ 75     | ±5             | ±300                      | 12                     | 77         | ±1200                  |
| UDS(H)03-48D12  | 36 ~ 75     | ±12            | ±125                      | 12                     | 82         | ±520                   |
| UDS(H)03-48D15  | 36 ~ 75     | ±15            | ±100                      | 12                     | 80         | ±440                   |

**INPUT SPECIFICATIONS**

| Parameter                     | Conditions              |            | Min. | Typ.           | Max. | Unit |
|-------------------------------|-------------------------|------------|------|----------------|------|------|
| Operating input voltage range |                         | 5Vin(nom)  | 4.5  | 5              | 13.2 | VDC  |
|                               |                         | 12Vin(nom) | 9    | 12             | 18   |      |
|                               |                         | 24Vin(nom) | 18   | 24             | 36   |      |
|                               |                         | 48Vin(nom) | 36   | 48             | 75   |      |
| Start up time                 | Constant resistive load | Power up   |      | 5              | 15   | ms   |
| Input surge voltage           | 1 second, max.          | 5Vin(nom)  |      |                | 15   | VDC  |
|                               |                         | 12Vin(nom) |      |                | 25   |      |
|                               |                         | 24Vin(nom) |      |                | 50   |      |
|                               |                         | 48Vin(nom) |      |                | 100  |      |
| Input filter                  |                         |            |      | Capacitor type |      |      |

**OUTPUT SPECIFICATIONS**

| Parameter                        | Conditions                         |        | Min.                           | Typ. | Max.  | Unit  |
|----------------------------------|------------------------------------|--------|--------------------------------|------|-------|-------|
| Voltage accuracy                 |                                    |        | -1.0                           |      | +1.0  | %     |
| Line regulation                  | Low Line to High Line at Full Load |        | -0.2                           |      | +0.2  | %     |
| Load regulation                  | No Load to Full Load               | Single | -1.0                           |      | +1.0  | %     |
|                                  |                                    | Dual   | -1.0                           |      | +1.0  | %     |
|                                  | 10% Load to 90% Full Load          | Single | -0.5                           |      | +0.5  | %     |
|                                  |                                    | Dual   | -0.8                           |      | +0.8  | %     |
| Cross regulation                 | Asymmetrical load 25%/100% FL      | Dual   | -5.0                           |      | +5.0  | %     |
| Ripple and noise                 | Measured by 20MHz bandwidth        |        |                                | 50   |       | mVp-p |
| Temperature coefficient          |                                    |        | -0.02                          |      | +0.02 | %/°C  |
| Transient response recovery time | 25% load step change               |        |                                | 500  |       | µs    |
| Short circuit protection         |                                    |        | Continuous, automatic recovery |      |       |       |

**GENERAL SPECIFICATIONS**

| Parameter             | Conditions               |                 | Min. | Typ. | Max.                         | Unit |
|-----------------------|--------------------------|-----------------|------|------|------------------------------|------|
| Isolation voltage     | 1 minute                 | Input to Output | 1600 |      |                              | VDC  |
| Isolation resistance  | 500VDC                   |                 | 1    |      |                              | GΩ   |
| Isolation capacitance |                          |                 |      |      | 75                           | pF   |
| Switching frequency   |                          |                 | 100  |      |                              | kHz  |
| Safety meets          |                          |                 |      |      | IEC/ EN/ UL62368-1           |      |
| Case material         |                          |                 |      |      | Non-conductive black plastic |      |
| Base material         |                          |                 |      |      | None                         |      |
| Potting material      |                          |                 |      |      | Potting compound (UL94 V-0)  |      |
| Weight                |                          |                 |      |      | 2.1g (0.07oz)                |      |
| MTBF                  | MIL-HDBK-217F, Full load |                 |      |      | 4.406 x 10 <sup>6</sup> hrs  |      |


**ENVIRONMENTAL SPECIFICATIONS**

| Parameter                       | Conditions |                   | Min. | Typ. | Max.                      | Unit |
|---------------------------------|------------|-------------------|------|------|---------------------------|------|
| Operating ambient temperature   |            | With derating     | -40  |      | +105                      | °C   |
| Maximum case temperature        |            |                   |      |      | 105                       | °C   |
| Storage temperature range       |            |                   | -55  |      | +125                      | °C   |
| Thermal shock                   |            |                   |      |      | MIL-STD-810F              |      |
| Vibration                       |            |                   |      |      | MIL-STD-810F              |      |
| Relative humidity               |            |                   |      |      | 5% to 95% RH              |      |
| Lead-free reflow solder process |            | Only for SMD type |      |      | IPC J-STD-020E            |      |
| Moisture sensitivity level(MSL) |            | Only for SMD type |      |      | IPC J-STD-033C<br>Level 2 |      |


**EMC SPECIFICATIONS**

| Parameter                      | Conditions  | Level  |
|--------------------------------|-------------|--|
| EMI                            | EN55032     | With external components.  |
| EMS                            | EN55035     |  |
| ESD                            | EN61000-4-2 | Air $\pm 8kV$ and Contact $\pm 6kV$  |
| Radiated immunity              | EN61000-4-3 | 10 V/m   |
| Fast transient                 | EN61000-4-4 | $\pm 2kV$  |
| Surge                          | EN61000-4-5 | With an external input filter capacitor (Nippon chemi-con KY series, 220 $\mu$ F/100V) |
|                                |             | $\pm 1kV$  |
| Conducted immunity             | EN61000-4-6 | 10 Vr.m.s  |
| Power frequency magnetic field | EN61000-4-8 | 100A/m continuous; 1000A/m 1 second  |


**CAUTION:** This power module is not internally fused. An input line fuse must always be used.

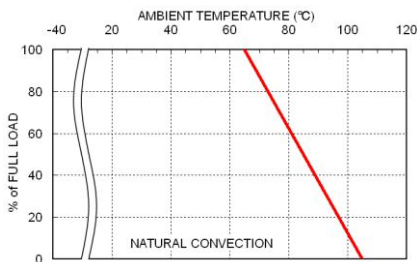**CHARACTERISTIC CURVE**


UDS(H)03-48S05 Derating Curve

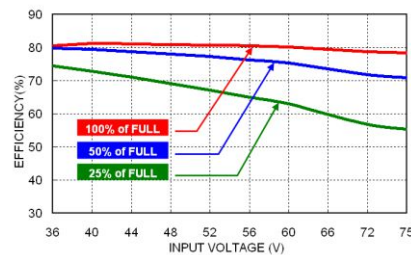

UDS(H)03-48S05 Efficiency vs. Input Voltage

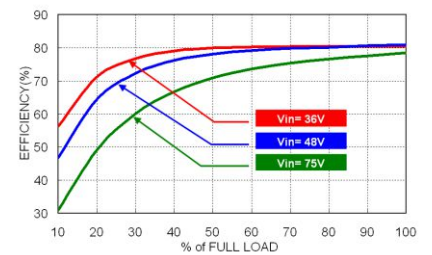

UDS(H)03-48S05 Efficiency vs. Output Load

**FUSE CONSIDERATION**

This power module is not internally fused. An input line fuse must always be used.


This encapsulated power module can be used in a wide variety of applications, ranging from simple stand-alone operation to an integrated part of sophisticated power architecture.

To maximum flexibility, internal fusing is not included; however, to achieve maximum safety and system protection, always use an input line fuse.

The input line fuse suggest as below :


| Modules                       | Fuse Rating (A) | Fuse Type |
|-------------------------------|-----------------|-----------|
| UDS(H)03-05S□□、UDS(H)03-05D□□ | 1.6             | Slow-Blow |
| UDS(H)03-12S□□、UDS(H)03-12D□□ | 0.8             | Slow-Blow |
| UDS(H)03-24S□□、UDS(H)03-24D□□ | 0.5             | Slow-Blow |
| UDS(H)03-48S□□、UDS(H)03-48D□□ | 0.315           | Slow-Blow |

The table based on the information provided in this data sheet on inrush energy and maximum DC input current at low Vin.

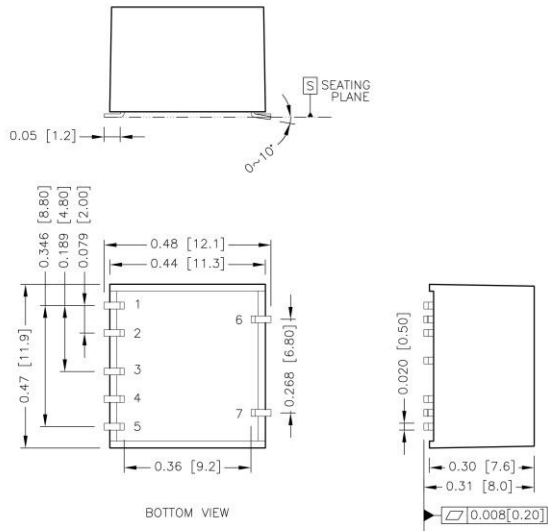**MECHANICAL DRAWING**
**UDS03**

**PIN CONNECTION**

| PIN | SINGLE | DUAL   |
|-----|--------|--------|
| 1   | -Vin   | -Vin   |
| 2   | +Vin   | +Vin   |
| 3   | +Vout  | +Vout  |
| 4   | No Pin | Common |
| 5   | -Vout  | -Vout  |
| 6   | * NC   | * NC   |
| 7   | * NC   | * NC   |

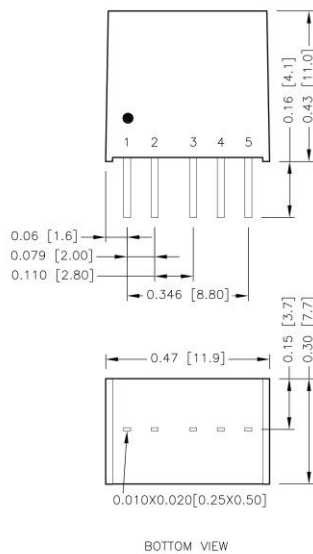\* NC : No electrical characteristics


**UDH03**

**PIN CONNECTION**

| PIN | SINGLE | DUAL   |
|-----|--------|--------|
| 1   | -Vin   | -Vin   |
| 2   | +Vin   | +Vin   |
| 3   | +Vout  | +Vout  |
| 4   | No Pin | Common |
| 5   | -Vout  | -Vout  |

1. All dimensions in inch [mm]
2. Tolerance :x.xx±0.02 [x.x±0.5]  
x.xxx±0.01 [x.xx±0.25]
3. Pin dimension tolerance ±0.004 [0.10]


## RECOMMENDED PAD LAYOUT
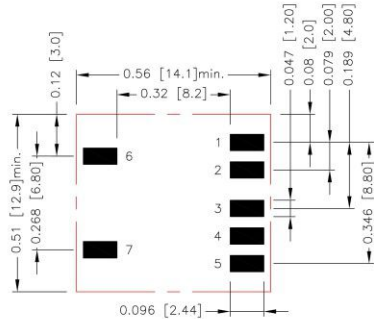
### UDS03



All dimensions in inch[mm]  
 Pad size(lead free recommended)  
 Top view pad 1.2.3.4.5.6.7:0.096x0.047[2.44x1.20]

### UDH03

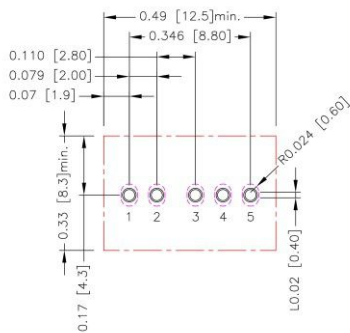

All dimensions in inch[mm]  
 Pad size(lead free recommended)  
 Through hole 1.2.3.4.5:  $\Phi 0.031$ [0.80]  
 Top view pad 1.2.3.4.5:  $\Phi 0.039$ [1.00]  
 Bottom view pad 1.2.3.4.5:  
 Groove R0.024[0.60]L0.02[0.40]

## THERMAL CONSIDERATIONS

The power module operates in a variety of thermal environments.

However, sufficient cooling should be provided to help ensure reliable operation of the unit.


Heat is removed by conduction, convection, and radiation to the surrounding environment.

Proper cooling can be verified by measuring the point as the figure below.

The temperature at this location should not exceed "Maximum case temperature".

When operating, adequate cooling must be provided to maintain the test point temperature at or below "Maximum case temperature".


You can limit this temperature to a lower value for extremely high reliability.



TOP VIEW



## LEAD FREE REFLOW PROFILE For SMD Type

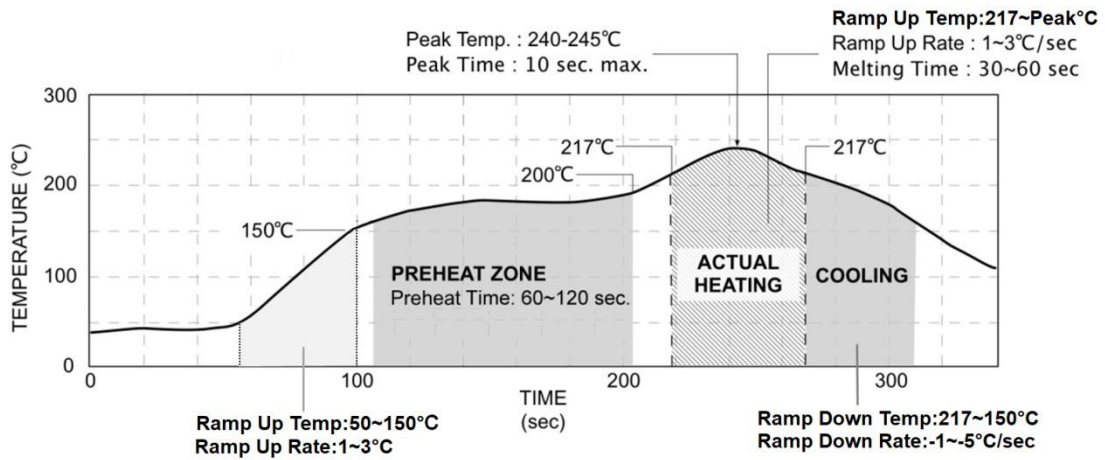

\*The curves define the maximum peak reflow temperature permissible measured on pin1 or Vin pin.



### P-DUKE Technology Co., Ltd.

Tel +886-4-2359-0668  
Fax +886-4-2359-1337  
Email sale@pduke.com  
Web www.pduke.com  
Add No. 36, 22<sup>nd</sup> Rd., Taichung Industrial Park,  
Taichung, Taiwan, R.O.C.