



P-DUKE POWER

MSC15 Series


AC-DC POWER SUPPLIES
Up to 15 Watts

5
YEARS
WARRANTY

ROHS
COMPLIANT

REACH
COMPLIANT

+85°C
-40°C
AMBIENT TEMP.

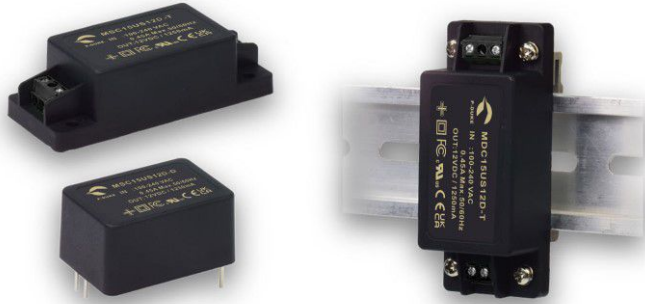

Medical



Automation



Datacom



IPC



Industry



Measurement



Telecom



Automobile



Boat



Charger



PV



Railway

UL US CB CE UK CA



| | | | | | | | | | | |
|----------------|---|---------------------------|---|---------------------------|-------------------------|---|-------------------------------|-----|-----|-----|
| 2 x MOPP | 4000 VAC Reinforced Insulation | ADJ. Output Voltage | Internal EN55032 Class Filter B | LOW Leakage Current | LOW Standby Power | Operating Altitude 5000 meter | Protection Class II | OCP | OVP | SCP |
|----------------|---|---------------------------|---|---------------------------|-------------------------|---|-------------------------------|-----|-----|-----|

PART NUMBER STRUCTURE

| M | S | C | 15 | U | S | 12 | D | - | T |
|---------------------|-------------------------------------|----------------|------------------|--------------------------|-----------------|--|-----------------------------|---|--|
| Application | Package Code | Dimension Code | Output Power (W) | Input Voltage (VAC) | Output Quantity | Output Voltage (VDC) | Protection Type | | Connector Options |
| Medical Application | S: Encapsulated D: Din rail type | | | U: Universal 85 ~ 264 | S: Single | 3P3: 3.3 05: 5 7P5: 7.5 09: 9 12: 12 15: 15 18: 18 24: 24 28: 28 36: 36 48: 48 53: 53 | D: CLASS II B: CLASS II※ | | T: Terminal Block M: Molex D: Pin Type □: JST |

※NRND: Not recommended for new designs

TECHNICAL SPECIFICATION All specifications are typical at 230VAC input, full load and 25°C unless otherwise noted

| Model Number | Input Range | Output Voltage | Output Current Natural Convection | Max. Output Power | Input Power @No Load | Efficiency | Maximum Capacitor Load |
|--------------------------------|-------------|----------------|-----------------------------------|-------------------|----------------------|------------|------------------------|
| | VAC | VDC | mA | W | mW | % | μF |
| MSC15US3P3D-T MSC15US3P3D-D | 85 ~ 264 | 3.3 | 4000 | 13.2 | 75 | 84 | 6000 |
| MSC15US05D-T MSC15US05D-D | 85 ~ 264 | 5 | 3000 | 15 | 75 | 86 | 4000 |
| MSC15US7P5D-T MSC15US7P5D-D | 85 ~ 264 | 7.5 | 2000 | 15 | 75 | 86 | 3000 |
| MSC15US09D-T MSC15US09D-D | 85 ~ 264 | 9 | 1670 | 15 | 75 | 86 | 1860 |
| MSC15US12D-T MSC15US12D-D | 85 ~ 264 | 12 | 1250 | 15 | 75 | 87 | 1200 |
| MSC15US15D-T MSC15US15D-D | 85 ~ 264 | 15 | 1000 | 15 | 75 | 87 | 820 |
| MSC15US18D-T MSC15US18D-D | 85 ~ 264 | 18 | 834 | 15 | 75 | 87 | 560 |
| MSC15US24D-T MSC15US24D-D | 85 ~ 264 | 24 | 625 | 15 | 75 | 88 | 470 |
| MSC15US28D-T MSC15US28D-D | 85 ~ 264 | 28 | 536 | 15 | 75 | 88 | 330 |
| MSC15US36D-T MSC15US36D-D | 85 ~ 264 | 36 | 417 | 15 | 75 | 88 | 220 |
| MSC15US48D-T MSC15US48D-D | 85 ~ 264 | 48 | 313 | 15 | 75 | 88.5 | 150 |
| MSC15US53D-T MSC15US53D-D | 85 ~ 264 | 53 | 284 | 15 | 75 | 89 | 82 |

INPUT SPECIFICATIONS

| Parameter | Conditions | Min. | Typ. | Max. | Unit |
|-------------------------------|----------------------|------|------|------|--------------|
| Operating input voltage range | AC input | 85 | | 264 | VAC |
| | DC input | 120 | | 370 | VDC |
| Input frequency | AC input | 47 | | 63 | Hz |
| Input current | 100VAC and Full Load | | | 0.45 | A |
| | 240VAC and Full Load | | | 0.30 | |
| No load input power | 230VAC | | 75 | | mW |
| Leakage current | 264VAC | | 75 | | μA |
| Start up time | 115VAC and Full Load | | 1500 | | ms |
| Rise time | | | 20 | | ms |
| Hold up time | 115VAC and Full Load | | 8 | | ms |
| Input inrush current | 230VAC(cold start) | | 40 | | A |
| Input protection | Internal fuse | | | | T1.6A/250VAC |


| OUTPUT SPECIFICATIONS | | | | | | |
|-------------------------------|--|--------------------------------|--------------------------------|------|-------|-------|
| Parameter | Conditions | | Min. | Typ. | Max. | Unit |
| Output power | | | | | 15 | Watts |
| Initial set voltage accuracy | 230VAC and Full Load | | -1.0 | | +1.0 | % |
| Line regulation | Low Line to High Line at Full Load | | -0.2 | | +0.2 | % |
| Load regulation | No Load to Full Load | 3.3Vout, 5Vout | -0.7 | | +0.7 | % |
| | | Others | -0.5 | | +0.5 | |
| | 10% Load to 90% Load | 3.3Vout, 5Vout | -0.6 | | +0.6 | % |
| | | Others | -0.4 | | +0.4 | |
| Voltage adjustability | Pin type | | -10 | | +10 | % |
| Minimum load | | | | 0 | | % |
| Ripple and noise | Measured by 20MHz bandwidth With a 10µF/50V 1206 X5R MLCC | 3.3Vout, 5Vout | | 40 | | mVp-p |
| | | 7.5Vout, 9Vout, 12Vout, 15Vout | | 70 | | |
| With a 1µF/100V 1206 X7R MLCC | 18Vout, 24Vout, 28Vout, 36Vout | | 100 | | | |
| | 48Vout, 53Vout | | 140 | | | |
| Temperature coefficient | | | -0.02 | | +0.02 | %/°C |
| Transient response | Load step form 75 ~ 100% change at 2.5A/µs | Peak deviation | | 5 | | %Vout |
| | | Recovery time | | 500 | | µs |
| Over voltage protection | % of Vout(nom); Latch mode | | 115 | | 140 | % |
| Over load protection | % of Iout rated; Hiccup mode | | | 145 | | % |
| Short circuit protection | | | Continuous, automatic recovery | | | |

| GENERAL SPECIFICATIONS | | | | | | |
|---|--|-------------------------------------|----------------------------|-----------|--|------|
| Parameter | Conditions | | Min. | Typ. | Max. | Unit |
| Isolation voltage | 1 minute (2MOPP insulation) | Input to Output | 4000 | | | VAC |
| Isolation resistance | 500VDC | | 0.1 | | | GΩ |
| Switching frequency | 230VAC | MSC15USxxD MSC15USxx, MSC15USxxB | | 100 85 | | kHz |
| Safety approvals (MSC15USxxD is pending) | IEC/ EN/ ANSI/AAMI ES 60601-1 IEC/ EN/ UL 62368-1 | | | | UL:E360199 UL:E193009 CB:UL(Demko) | |
| Weight | | | Connector type Pin type | | 48.0g (1.69oz) | |
| | | | | | 43.0g (1.53oz) | |
| MTBF | MIL-HDBK-217F, Full load | | | | 3.063 x 10 ⁶ | hrs |


| ENVIRONMENTAL SPECIFICATIONS | | | | | | |
|-------------------------------|--------------------|---------------|---------------|------|------|------|
| Parameter | Conditions | | Min. | Typ. | Max. | Unit |
| Operating ambient temperature | Natural convection | With derating | -40 | | +85 | °C |
| Storage temperature range | | | -40 | | +85 | °C |
| Operating altitude | | | | | 5000 | m |
| Shock | | | IEC60068-2-27 | | | |
| Vibration | | | IEC60068-2-6 | | | |
| Relative humidity | Non-condensing | | 5% to 95% RH | | | |

| EMC SPECIFICATIONS | | | |
|--------------------------------|---|---------------------|---------------------------------------|
| Parameter | Conditions | | Level |
| EMI | EN55011, EN55032, EN60601-1-2, and FCC Part 18 / 15 | | Conducted Class B Radiated Class B |
| Harmonic currents | EN61000-3-2 | Full Load | Class A |
| Voltage flicker | EN61000-3-3 | | |
| EMS | EN55035 and EN60601-1-2 | | |
| ESD | EN61000-4-2 | | Perf. Criteria A |
| Radiated immunity | EN61000-4-3 | 20 V/m | Perf. Criteria A |
| Fast transient | EN61000-4-4 | $\pm 2\text{kV}$ | Perf. Criteria A |
| Surge | EN61000-4-5 | DM $\pm 1\text{kV}$ | Perf. Criteria A |
| Conducted immunity | EN61000-4-6 | 20 Vr.m.s | Perf. Criteria A |
| Power frequency magnetic field | EN61000-4-8 | 30 A/m | Perf. Criteria A |
| Dip and interruptions | EN61000-4-11 | | |


CHARACTERISTIC CURVE

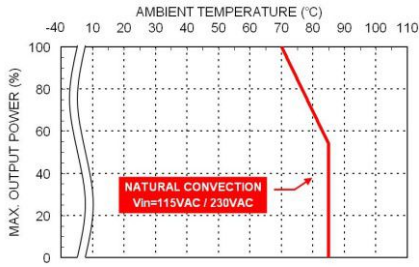


Derating Curve vs. Ambient Temperature
MSC15USxxD xx=3P3/05/7P5/09/12/15/18
Connector Option : (Blank: JST)

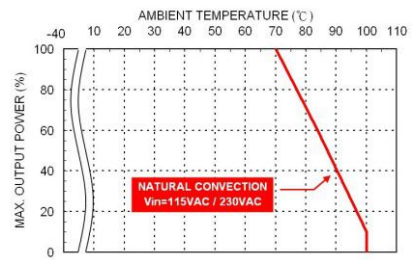


Derating Curve vs. Ambient Temperature
MSC15USxxD xx=3P3/05/7P5/09/12/15/18
Connector Option : (-M / -T / -D)

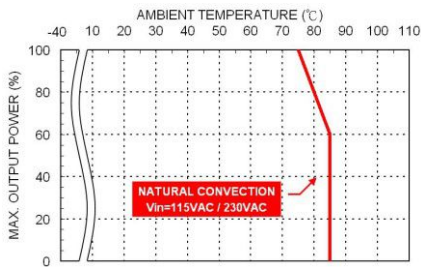


Derating Curve vs. Ambient Temperature
MSC15USxxD xx=24/28/36/48/53
Connector Option : (Blank: JST)

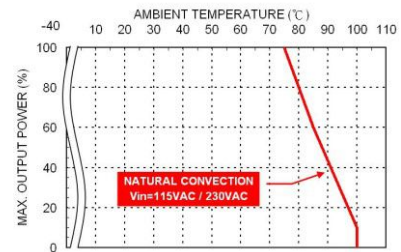


Derating Curve vs. Ambient Temperature
MSC15USxxD xx=24/28/36/48/53
Connector Option : (-M / -T / -D)

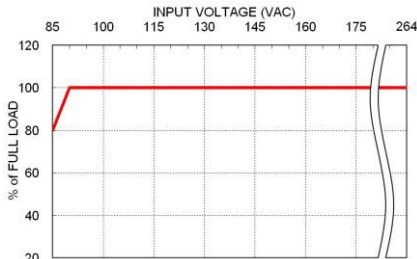

Derating Curve vs. Input Voltage

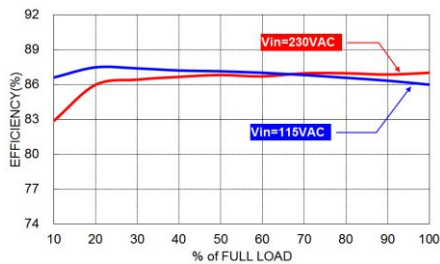


MSC15US12D Efficiency vs. Output Load

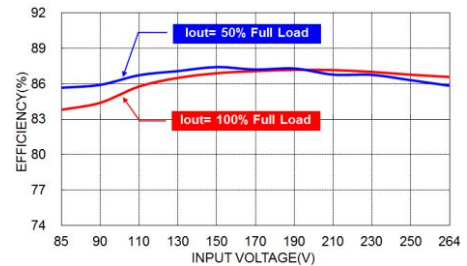

MSC15US12D Efficiency vs. Input Voltage

MECHANICAL DRAWING

MSC-T Connector type

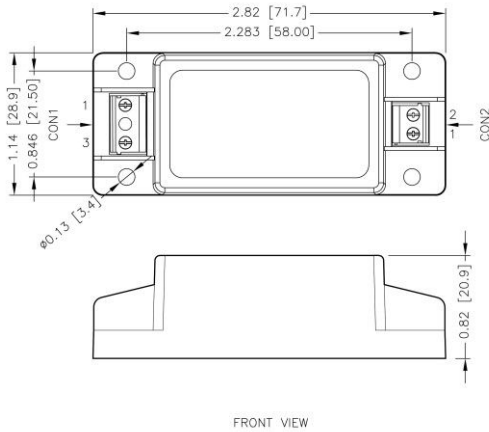


CONNECTORS CONNECTION

| CON1 – Input Connector | |
|------------------------|---------|
| Pin 1 | Line |
| Pin 3 | Neutral |

| CON2 – Output Connector | |
|-------------------------|--------|
| Pin 1 | - Vout |
| Pin 2 | +Vout |

- All dimensions in inch [mm]
Tolerance : $x.xx \pm 0.02$ [$x.xx \pm 0.5$]
 $x.xxx \pm 0.010$ [$x.xx \pm 0.25$]
- The screw locked torque: MAX 5.0kgf-cm/0.49N-m
- Terminal screw locked torque: MAX 4.0kgf-cm/0.39N-m

MDC-T Din rail type

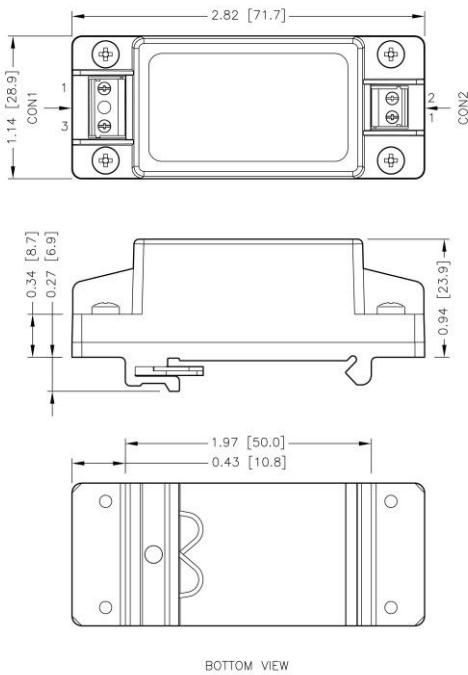

- All dimensions in inch [mm]
Tolerance : $x.xx \pm 0.02$ [$x.xx \pm 0.5$]
 $x.xxx \pm 0.010$ [$x.xx \pm 0.25$]
- Terminal screw locked torque: MAX 4.0kgf-cm/0.39N-m

CONNECTOR OPTIONS

Blank: JST Type



Housing
CON1: VHR-3N
CON2: VHR-2N

Crimp terminals
CON1: SVH-21T-P1.1
CON2: SVH-21T-P1.1

-M



Molex Type

Housing
CON1: 09-50-8031
CON2: 09-50-8021

Crimp terminals
CON1: SD-2478
CON2: SD-2478

USxxD -T



Terminal Block

Mates with
Screw locked torque
MAX 2Kgf.cm/0.2N.m

Wire dimension range
26 ~ 18AWG

-T




Terminal Block

Mates with
Screw locked torque
MAX 2Kgf.cm/0.2N.m

Wire dimension range
26 ~ 16AWG

MECHANICAL DRAWING

MSC -D Pin type

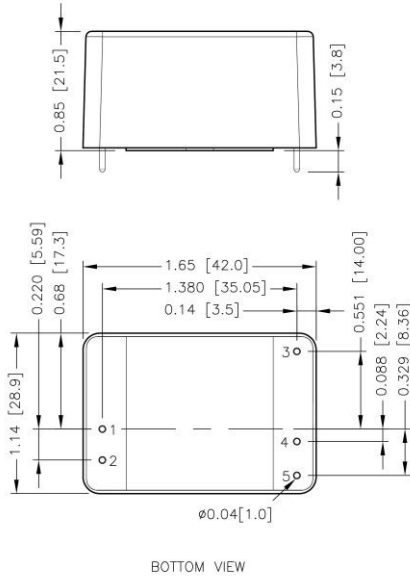


PIN CONNECTION

| PIN | SINGLE |
|-----|---------|
| 1 | Neutral |
| 2 | Line |
| 3 | Trim |
| 4 | -Vout |
| 5 | +Vout |

- All dimensions in inch [mm]
Tolerance :x.xx±0.02 [x.x±0.5]
x.xxx±0.010 [x.xx±0.25]
- Pin pitch tolerance ±0.010 [0.25]
- Pin dimension tolerance ±0.004 [0.10]

RECOMMENDED PAD LAYOUT

MSC -D Pin type

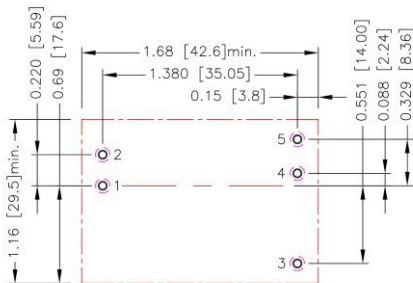

- All dimensions in inch [mm]
Pad size (lead free recommended)
Through hole 1.2.3.4.5: Ø0.051 [1.30]
Top view pad 1.2.3.4.5: Ø0.064 [1.63]
Bottom view pad 1.2.3.4.5: Ø0.102 [2.60]

OUTPUT VOLTAGE ADJUSTMENT

It allows the user to increase or decrease the output voltage of the module.

This is accomplished by connecting an external resistor between the Trim pin and either the +Vout or -Vout pins.

With an external resistor between the Trim and -Output pin, the output voltage increases.

With an external resistor between the Trim and +Output pin, the output voltage decreases.

The external Trim resistor needs to be at least 1/16W of rated power.

Trim Up Equation

$$R_U = \left[\frac{G \times L}{(V_{o,up} - L - K)} - H \right] \Omega$$

Trim Down Equation

$$R_D = \left[\frac{(V_{o,down} - L) \times G}{(V_o - V_{o,down})} - H \right] \Omega$$


Trim Constants

| Module | G | H | K | L |
|---------------|--------|------|------|-----|
| MSC15US3P3D-D | 2000 | 2000 | 0.8 | 2.5 |
| MSC15US05D-D | 7500 | 2000 | 2.5 | 2.5 |
| MSC15US7P5D-D | 22000 | 2000 | 5 | 2.5 |
| MSC15US09D-D | 30000 | 2000 | 6.5 | 2.5 |
| MSC15US12D-D | 51000 | 2000 | 9.5 | 2.5 |
| MSC15US15D-D | 68000 | 2000 | 12.5 | 2.5 |
| MSC15US18D-D | 91000 | 2000 | 15.5 | 2.5 |
| MSC15US24D-D | 130000 | 2000 | 21.5 | 2.5 |
| MSC15US28D-D | 150000 | 2000 | 25.5 | 2.5 |
| MSC15US36D-D | 200000 | 2000 | 33.5 | 2.5 |
| MSC15US48D-D | 270000 | 2000 | 45.5 | 2.5 |
| MSC15US53D-D | 270000 | 2000 | 50.5 | 2.5 |

EXTERNAL OUTPUT TRIMMING

Output can be externally trimmed by using the method shown below.

Trim-up



US3P3D-D

| ΔV (%) | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
|------------------|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Vout (V) | 3.333 | 3.366 | 3.399 | 3.432 | 3.465 | 3.498 | 3.531 | 3.564 | 3.597 | 3.630 |
| RU (k Ω) | 149.515 | 73.758 | 48.505 | 35.879 | 28.303 | 23.253 | 19.645 | 16.939 | 14.835 | 13.152 |

US05D-D

| ΔV (%) | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
|------------------|---------|---------|---------|--------|--------|--------|--------|--------|--------|--------|
| Vout (V) | 5.050 | 5.100 | 5.150 | 5.200 | 5.250 | 5.300 | 5.350 | 5.400 | 5.450 | 5.500 |
| RU (k Ω) | 373.000 | 185.500 | 123.000 | 91.750 | 73.000 | 60.500 | 51.571 | 44.875 | 39.667 | 35.500 |

US7P5D-D

| ΔV (%) | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
|------------------|---------|---------|---------|---------|---------|---------|---------|--------|--------|--------|
| Vout (V) | 7.575 | 7.650 | 7.725 | 7.800 | 7.875 | 7.950 | 8.025 | 8.100 | 8.175 | 8.250 |
| RU (k Ω) | 731.333 | 364.667 | 242.444 | 181.333 | 144.667 | 120.222 | 102.762 | 89.667 | 79.481 | 71.333 |

US09D-D

| ΔV (%) | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
|------------------|---------|---------|---------|---------|---------|---------|---------|---------|--------|--------|
| Vout (V) | 9.090 | 9.180 | 9.270 | 9.360 | 9.450 | 9.540 | 9.630 | 9.720 | 9.810 | 9.900 |
| RU (k Ω) | 831.333 | 414.667 | 275.778 | 206.333 | 164.667 | 136.889 | 117.048 | 102.167 | 90.593 | 81.333 |

US12D-D

| ΔV (%) | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
|------------------|----------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| Vout (V) | 12.120 | 12.240 | 12.360 | 12.480 | 12.600 | 12.720 | 12.840 | 12.960 | 13.080 | 13.200 |
| RU (k Ω) | 1060.500 | 529.250 | 352.167 | 263.625 | 210.500 | 175.083 | 149.786 | 130.813 | 116.056 | 104.250 |

US15D-D

| ΔV (%) | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
|------------------|----------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| Vout (V) | 15.150 | 15.300 | 15.450 | 15.600 | 15.750 | 15.900 | 16.050 | 16.200 | 16.350 | 16.500 |
| RU (k Ω) | 1131.333 | 564.667 | 375.778 | 281.333 | 224.667 | 186.889 | 159.905 | 139.667 | 123.926 | 111.333 |

OUTPUT VOLTAGE ADJUSTMENT(CONTINUED)
Trim-up

| US18D-D | | | | | | | | | | |
|------------------|----------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| ΔV (%) | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
| Vout (V) | 18.180 | 18.360 | 18.540 | 18.720 | 18.900 | 19.080 | 19.260 | 19.440 | 19.620 | 19.800 |
| RU (k Ω) | 1261.889 | 629.944 | 419.296 | 313.972 | 250.778 | 208.648 | 178.556 | 155.986 | 138.432 | 124.389 |


| US24D-D | | | | | | | | | | |
|------------------|----------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| ΔV (%) | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
| Vout (V) | 24.240 | 24.480 | 24.720 | 24.960 | 25.200 | 25.440 | 25.680 | 25.920 | 26.160 | 26.400 |
| RU (k Ω) | 1352.167 | 675.083 | 449.389 | 336.542 | 268.833 | 223.694 | 191.452 | 167.271 | 148.463 | 133.417 |

| US28D-D | | | | | | | | | | |
|------------------|----------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| ΔV (%) | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
| Vout (V) | 28.280 | 28.560 | 28.840 | 29.120 | 29.400 | 29.680 | 29.960 | 30.240 | 30.520 | 30.800 |
| RU (k Ω) | 1337.286 | 667.643 | 444.429 | 332.821 | 265.857 | 221.214 | 189.327 | 165.411 | 146.810 | 131.929 |

| US36D-D | | | | | | | | | | |
|------------------|----------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| ΔV (%) | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
| Vout (V) | 36.360 | 36.720 | 37.080 | 37.440 | 37.800 | 38.160 | 38.520 | 38.880 | 39.240 | 39.600 |
| RU (k Ω) | 1386.889 | 692.444 | 460.963 | 345.222 | 275.778 | 229.481 | 196.413 | 171.611 | 152.321 | 136.889 |

| US48D-D | | | | | | | | | | |
|------------------|----------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| ΔV (%) | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
| Vout (V) | 48.480 | 48.960 | 49.440 | 49.920 | 50.400 | 50.880 | 51.360 | 51.840 | 52.320 | 52.800 |
| RU (k Ω) | 1404.250 | 701.125 | 466.750 | 349.563 | 279.250 | 232.375 | 198.893 | 173.781 | 154.250 | 138.625 |

| US53D-D | | | | | | | | | | |
|------------------|----------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| ΔV (%) | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
| Vout (V) | 53.530 | 54.060 | 54.590 | 55.120 | 55.650 | 56.180 | 56.710 | 57.240 | 57.770 | 58.300 |
| RU (k Ω) | 1271.585 | 634.792 | 422.528 | 316.396 | 252.717 | 210.264 | 179.941 | 157.198 | 139.509 | 125.358 |

Trim-down


| US3P3D-D | | | | | | | | | | |
|------------------|--------|--------|--------|-------|-------|-------|-------|-------|-------|-------|
| ΔV (%) | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
| Vout (V) | 3.267 | 3.234 | 3.201 | 3.168 | 3.135 | 3.102 | 3.069 | 3.036 | 3.003 | 2.970 |
| RD (k Ω) | 44.485 | 20.242 | 12.162 | 8.121 | 5.697 | 4.081 | 2.926 | 2.061 | 1.387 | 0.848 |

| US05D-D | | | | | | | | | | |
|------------------|---------|---------|---------|--------|--------|--------|--------|--------|--------|--------|
| ΔV (%) | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
| Vout (V) | 4.950 | 4.900 | 4.850 | 4.800 | 4.750 | 4.700 | 4.650 | 4.600 | 4.550 | 4.500 |
| RD (k Ω) | 365.500 | 178.000 | 115.500 | 84.250 | 65.500 | 53.000 | 44.071 | 37.375 | 32.167 | 28.000 |

| US7P5D-D | | | | | | | | | | |
|------------------|----------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| ΔV (%) | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
| Vout (V) | 7.425 | 7.350 | 7.275 | 7.200 | 7.125 | 7.050 | 6.975 | 6.900 | 6.825 | 6.750 |
| RD (k Ω) | 1442.667 | 709.333 | 464.889 | 342.667 | 269.333 | 220.444 | 185.524 | 159.333 | 138.963 | 122.667 |

| US09D-D | | | | | | | | | | |
|------------------|----------|----------|---------|---------|---------|---------|---------|---------|---------|---------|
| ΔV (%) | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
| Vout (V) | 8.910 | 8.820 | 8.730 | 8.640 | 8.550 | 8.460 | 8.370 | 8.280 | 8.190 | 8.100 |
| RD (k Ω) | 2134.667 | 1051.333 | 690.222 | 509.667 | 401.333 | 329.111 | 277.524 | 238.833 | 208.741 | 184.667 |

| US12D-D | | | | | | | | | | |
|------------------|----------|----------|----------|---------|---------|---------|---------|---------|---------|---------|
| ΔV (%) | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
| Vout (V) | 11.880 | 11.760 | 11.640 | 11.520 | 11.400 | 11.280 | 11.160 | 11.040 | 10.920 | 10.800 |
| RD (k Ω) | 3984.500 | 1965.750 | 1292.833 | 956.375 | 754.500 | 619.917 | 523.786 | 451.688 | 395.611 | 350.750 |

| US15D-D | | | | | | | | | | |
|------------------|----------|----------|----------|----------|----------|---------|---------|---------|---------|---------|
| ΔV (%) | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
| Vout (V) | 14.850 | 14.700 | 14.550 | 14.400 | 14.250 | 14.100 | 13.950 | 13.800 | 13.650 | 13.500 |
| RD (k Ω) | 5596.667 | 2763.333 | 1818.889 | 1346.667 | 1063.333 | 874.444 | 739.524 | 638.333 | 559.630 | 496.667 |

OUTPUT VOLTAGE ADJUSTMENT(CONTINUED)

Trim-down

| US18D-D | | | | | | | | | | |
|------------------|----------|----------|----------|----------|----------|----------|----------|---------|---------|---------|
| ΔV (%) | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
| Vout (V) | 17.820 | 17.640 | 17.460 | 17.280 | 17.100 | 16.920 | 16.740 | 16.560 | 16.380 | 16.200 |
| RD (k Ω) | 7743.111 | 3825.056 | 2519.037 | 1866.028 | 1474.222 | 1213.019 | 1026.444 | 886.514 | 777.679 | 690.611 |

| US24D-D | | | | | | | | | | |
|------------------|-----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| ΔV (%) | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
| Vout (V) | 23.760 | 23.520 | 23.280 | 23.040 | 22.800 | 22.560 | 22.320 | 22.080 | 21.840 | 21.600 |
| RD (k Ω) | 11513.833 | 5690.917 | 3749.944 | 2779.458 | 2197.167 | 1808.972 | 1531.690 | 1323.729 | 1161.981 | 1032.583 |

| US28D-D | | | | | | | | | | |
|------------------|-----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| ΔV (%) | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
| Vout (V) | 27.720 | 27.440 | 27.160 | 26.880 | 26.600 | 26.320 | 26.040 | 25.760 | 25.480 | 25.200 |
| RD (k Ω) | 13508.714 | 6678.357 | 4401.571 | 3263.179 | 2580.143 | 2124.786 | 1799.531 | 1555.589 | 1365.857 | 1214.071 |

| US36D-D | | | | | | | | | | |
|------------------|-----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| ΔV (%) | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
| Vout (V) | 35.640 | 35.280 | 34.920 | 34.560 | 34.200 | 33.840 | 33.480 | 33.120 | 32.760 | 32.400 |
| RD (k Ω) | 18409.111 | 9103.556 | 6001.704 | 4450.778 | 3520.222 | 2899.852 | 2456.730 | 2124.389 | 1865.901 | 1659.111 |

| US48D-D | | | | | | | | | | |
|------------------|-----------|-----------|----------|----------|----------|----------|----------|----------|----------|----------|
| ΔV (%) | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
| Vout (V) | 47.520 | 47.040 | 46.560 | 46.080 | 45.600 | 45.120 | 44.640 | 44.160 | 43.680 | 43.200 |
| RD (k Ω) | 25321.750 | 12524.875 | 8259.250 | 6126.437 | 4846.750 | 3993.625 | 3384.250 | 2927.219 | 2571.750 | 2287.375 |

| US53D-D | | | | | | | | | | |
|------------------|-----------|-----------|----------|----------|----------|----------|----------|----------|----------|----------|
| ΔV (%) | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
| Vout (V) | 52.470 | 51.940 | 51.410 | 50.880 | 50.350 | 49.820 | 49.290 | 48.760 | 48.230 | 47.700 |
| RD (k Ω) | 25454.415 | 12591.208 | 8303.472 | 6159.604 | 4873.283 | 4015.736 | 3403.202 | 2943.802 | 2586.491 | 2300.642 |