



<u> </u>

ISSUE NUMBER	
ORIGINAL	(1)

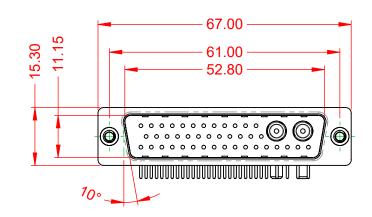




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, 30µ" GOLD PLATED



30A (CURRENT) POWER/CO-AX CONTACT RATING: (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX. **INSULATOR RESISTANCE:** 5000MΩ min. DIELECTRIC


.X ±0.25 .XX ±0.13 .XXX ±0.05

WITHSTANDING VOLTAGE:

OPERATING TEMPERATURE:

1000V AC rms

-55°C ~ 125°C



		SW REFERENCE NO.: 629 COMBO ASSEMBLY			
			DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
-o	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC. AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
ES CY. TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE	SHALL NOT BE REPRODUCED OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 629-43W2650-3N2		ISSUE	
		PART NUMBER: 629-43W	2650-3N2	1	



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANC

