



(1)

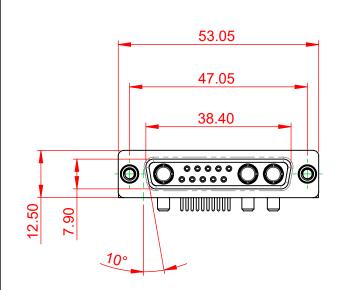




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

.XX ±0.13

.XXX ±0.05

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, 30µ GOLD PLATED




OPERATING TEMPERATURE:	-55°C ~ 125°C


POWER/CO-AX CONTACT RATING: 30A (CURRENT) (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX.

INSULATOR RESISTANCE: DIELECTRIC WITHSTANDING VOLTAGE:





		SW REFERENCE NO.: 630 COMBO ASSEMBLY		
COMBINATIO	COMBINATION D-SUB		DATE: JAN. 01/20	19
			DATE:	
ARE THE PROPERTY OF EDAC INC., AND TORONTO, ONTARIO CANADA ARE THE PROPERTY OF EDAC INC., AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS		SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
	DRAWING NUMBER: 630-13W	3640-3TE	ISSUE	
		PART NUMBER: 630-13W	3640-3TE	1





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.



