



THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER ORIGINAL

11.43 ±0.25



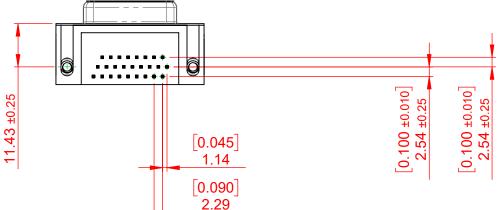

NOTES:

MATERIAL:

HOUSING: THERMOPLASTIC POLYESTER, UL94V-0

STEEL, NICKEL PLATED SHELL:

CONTACT: COPPER ALLOY, 15µ GOLD PLATING

OPERATING TEMPERATURE: -55°C TO +125°C

CURRENT RATING: 3A PER CONTACT

 $25m\Omega$ MAX. **CONTACT RESISTANCE: INSULATOR RESISTANCE:** 5000MΩ min.

DIELECTRIC

WITHSTANDING VOLTAGE: 1000V AC rms

634 SERIES D-SUB CONNECTOR

YOUR CONNECTION TO QUALITY & SERVICE

EDAC INC TORONTO, ONTARIO CANADA

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

	SW REFERENCE NO.: 634 ASSEMBLY		
	DRAWN: C.B	DATE: AUG. 01/2018	
	CHECKED:	DATE:	
	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF 1	
	DDAMING NUMBER: 624 026 262 555		963 FFF 1661 IF

DRAWING NUMBER: 634-026-363-555 ISSUE PART NUMBER: 634-026-363-555

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.