

Contact Dimensions:

500-Wire Hole .050x.025(1.27x0.64) - Tail LG=.260(6.60) .100 (2.54) Contact Spacing x .200 (5.08) Row Spacing



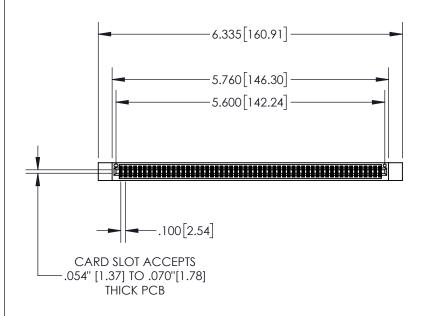

INSULATOR MATERIAL: THERMOPLASTIC, UL 94V-0

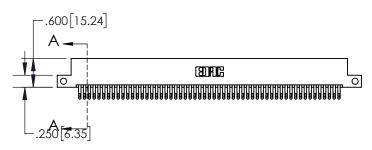

.330[8.38]

CARD SLOT

.370 [9.40]

SECTION A-A

.160 4.06 POINT OF CONTACT

1



CONTACT MATERIAL; COPPER TIN ALLOY CONTACT PLATING: GOLD ON THE MATING AREA, TIN PLATING ON THE CONTACT TAILS, NICKEL UNDERPLATE

YOUR CONNECTION TO QUALITY & SERVICE

ACAD REFERENCE NO. 845-ENG-MASTER		
DRAWN: R.STA.MONICA	DATE:MAY.16/2017	
CHECKED:	DATE:	
SCALE: 1:2	SHEET 1 OF 2	
DRAWING NUMBER	ISSUE	

845-ENG-MASTER

-.200 [5.08]







INSULATOR MATERIAL: THERMOPLASTIC POLYESTER, UL 94V-0 DAP MATERIAL AVAILABLE UPON REQUEST

Contact Code 558

CONTACT MATERIAL; COPPER ALLOY CONTACT PLATING: GOLD ON THE MATING AREA, TIN PLATING ON THE CONTACT TAILS, NICKEL UNDERPLATE

845/895 SERIES HIGH TEMP CARD EDGE CONNECTOR CONTACT CODE 555,556,558,559,560 DIMENSIONS

YOUR CONNECTION TO QUALITY & SERVICE

Contact Code 559

	ACAD REFERENCE NO. 845-ENG-MASTER		
	DRAWN: R.STA.MONICA	DATE:MAY.16/2017	
	CHECKED:	DATE:	
	SCALE: 1:1	SHEET 2 OF 2	
D	DRAWING NUMBER	ISSUE	

Contact Code 560

845-ENG-MASTER