

	REVISIONS									
REV	ECR	DESCRIPTION	DRAWN	DRAWN DATE						
1		ENGINEERING RELEASE	P. BURDGE	E 11/10/2020						

-XX IN THE ENDING OF THE CABLE PART NUMBER IS CALLING OUT THE LENGTH OF THE ASSEMBLY FROM CENTER TO MATING FLANGE OF CONNECTORS. EXAMPLES SHOWN BELOW:

LTI P/N: CB1.37-IPX4LLK-SARFGT-6IN (6 INCHES) CB1.37-IPX4LLK-SARFGT-8IN (8 INCHES)

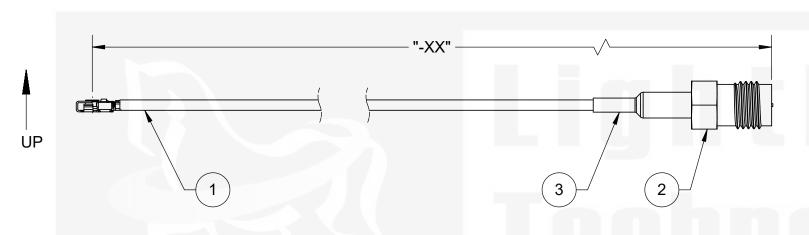

ITEM	PART NUMBER	DESCRIPITION	QTY
1	IPX4LLK-137	IPX4L (MHF4L), LOCKING, 1.37MM COAX	1
2	SASRF11GT-316	SMA, REV POL JACK, CABLE CRIMP	1
3	1635F-1/8"	.125 (1/8) DIA, .75 LENGTH, GREEN	1

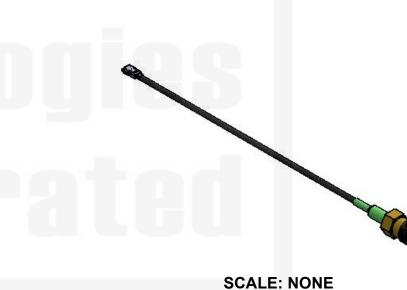

IPX® AND MHF® ARE REGISTAERED TRADEMARKS OF I-PEX CO., LTD. CORPORATION

DO NOT SCALE DRAV	VING	1	Lighthorse Technologies					
TOLERANCES UNLESS OTHERW DIMENSIONS ARE IN MILLIMETERS	/ISE SPECIFIED	San Diego, CA WWW.RFCONNECTOR.COM		,				
X = ±0.5 X.X = ±0.25	⊕ €-}	TITLE: CABLE ASSEMBLY, I-PEX LOCKING,						
$X.X = \pm 0.13$ $X.XX = \pm 0.13$ $ANGLE = \pm 30'$	$X.XX = \pm 0.13$ THIRD ANGLE			(MHF4L) R/A JACK, CRIMP TO SMA, RP JACK,				
CUSTOMER APPRO	VAL	CABLE MNT, 1.37MM COAX						
SIGN / DATE:		SIZE	PAF	RT/DWG. NO:		REV		
ENG APPR.			^-	24 07 IDV/41 LIV 04 DEOT		4		
CHECKED	CHECKED			B CB1.37-IPX4LLK-SARFGT-xxIN				
DRAWN P. BURDGE	11-10-2020							
NAME	DATE	SCALE: 2:1		FILE NAME	SHEE	T 1 OF 1		

PROPRIETARY AND CONFIDENTIAL

UNLESS OTHERWISE SPECIFIED: THIS DOCUMENT CONTAINS LIGHTHORSE TECHNOLOGIES INFORMATION, REPRODUCTION, USE, DISCLOSURE OR TRANSMITTAL OF ALL OR ANY PART OF THIS DOCUMENT IS PROHIBITED EXCEPT TO THE EXTENT APPROVED IN WRITING BY AN AUTHORIZED REPRESENTATIVE OF LIGHTHORSE TECHNOLOGIES. LIGHTHORSE TECHNOLOGIES RESERVES ALL RIGHTS UNDER PATENTS, TRADEMARKS, COPY RIGHTS AND TRADE SECRETS. COPY RIGHTS OF LIGHTHORSE TECHNOLOGIES 2011, ALL RIGHTS RESERVED.



4 3

2

1

6