

10 9 8 7 6 5 4 3 2 1

F

E

D

C

B

A

F




E

D

C

B

A

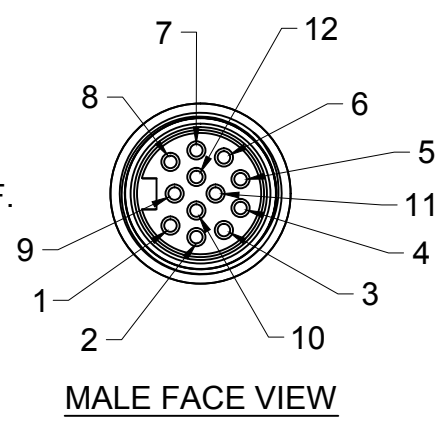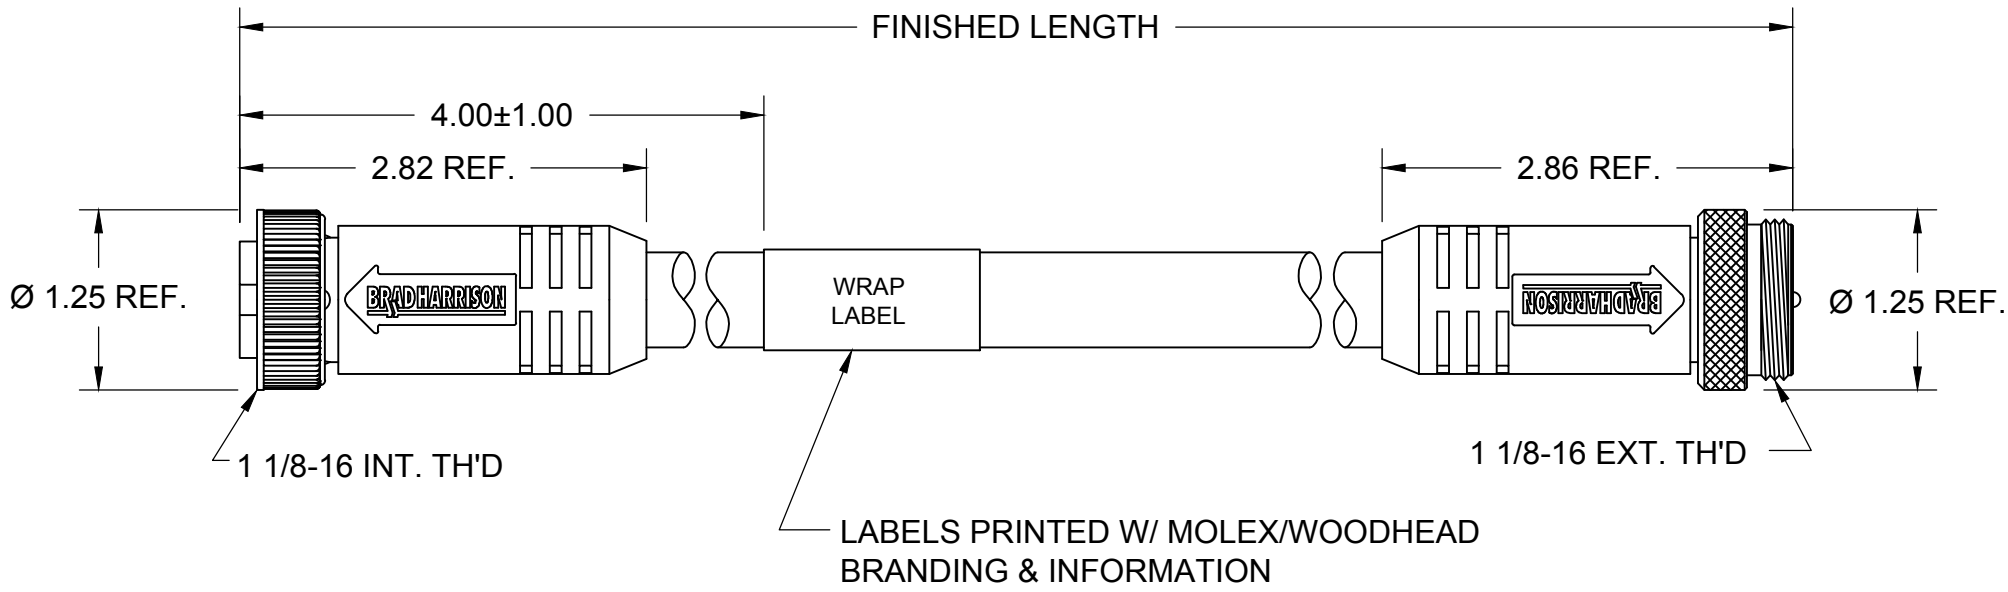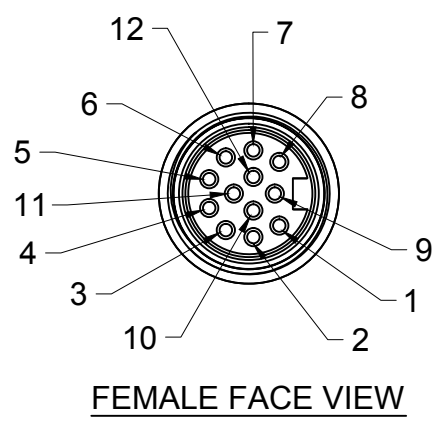

1	WHITE	1
2	GREEN	2
3	YELLOW	3
4	GRAY	4
5	PINK	5
6	RED	6
7	BLACK	7
8	VIOLET	8
9	GREEN/YELLOW	9
10	BROWN	10
11	BLUE	11
12	GRAY/PINK	12

332030K04MXXX

CABLE
K04 - #16AWG 12C
YELLOW TPE

LENGTH
M050 - 5 METER
M500 - 50 METER

SPECIFICATIONS:
 COUPLING NUT: (FEMALE) ZINC DIECAST W/ BLACK ELECTROPHORETIC COATING
 (MALE) BLACK ANODIZED ALUMINUM
 CONTACT MATERIAL: GOLD/NICKEL OVER COPPER ALLOY
 INSERT MATERIAL: YELLOW TPE
 OVERMOLD MATERIAL: YELLOW TPE

CABLE: #16AWG 12C YELLOW TPE
 2 MILLION CYCLE HI-FLEX
 TC-ER & FT4 RATED

ASSEMBLY RATING: 600V, 8A
 ENVIRONMENTAL: -20°C TO 90°C
 IP67 WHEN MATED
 AGENCY APPROVALS: UL LISTED

CORRECTED CABLE RATING EC NO: IPG2014-2074 DRWN: BARDEN 2014/09/18 CHKD: TWOLDEGE 2014/09/18 APPR: JFMURPHY 2013/04/05	REV B	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE INCH ONLY		SCALE 3:4	DESIGN UNITS INCH	THIRD ANGLE PROJECTION		
			▽=0 ▽C=0	4 PLACES	mm	INCH	DRAWN BY VOU	DATE 2012/02/27	TITLE MINI-CHANGE CORDSET 12P MALE/FEMALE ST/ST #16/12 TPE CABLE			
				3 PLACES	±---	±---	CHECKED BY TWOLDEGE	DATE 2013/03/04				
				2 PLACES	±0.13	±.010	APPROVED BY JFMURPHY	DATE 2013/04/05	DOCUMENT NO. SD-130012-007			
ANGULAR ±1/2°			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO. SEE SCHEMATIC		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		SHEET NO. 1 OF 1			

10 9 8 7 6 5 4 3 2 1