

	12		11	10		9	8		7	6	6
	FEMALE	FACE VIEW						TERIAL MBER	ENGINE NUM	EERING IBER	FI L
н	2 ¬	-3					1300	280021	DND22	A-M002	0
							1300	280050	DND22	A-M200	20M
							1300	280055	DND22	A-M400	40M
	5-	<u> </u>				-				FINISHED	LENGTH
G						-	[1	4.00 01.6]			
				9		-	1.84 [46.7				~ ~ ~ (
F				5	4					P/N XXXXXX	_ Ø.29 ⁽ [7.4]
		ES: .TERIAL: AS N NSH: AS NOT		Ø.5 [14.] FEMALE FA	5]		7)	8	(10))-	
E	3. EL	ECTRICAL: DLTAGE : 250						F	PART N	UMBEF	R LEG
		IRRENT: 4A							DN	D22A-M	005
D	5. PR 6. CC 7. UL	OTECTION: I OUPLING THR LISTED FILE	: E152210	IATED)						- - · · <u>- · ·</u>	F N N
	CSA CERTIFIED FILE: LR6837 8. ALL DIMENSIONS ARE FOR REFERENCE										Ν
				DTED OTHERWI	ISE						
с				1						SCHE	MATIC
	10	WRAP	LABEL	VINYL		BLACK/YEL	LOW		1 >	·	
	9		ING	NITRILE		RED		D	2 >	>	
1 T	· · · · · · · · · · · · · · · · · · ·			i .	1				~ \		

	ITEM	COMPONENT	MATERIAL	FINISH	
A	1	CABLE #22 AWG	PVC	GRAY	
	2	MALE INSERT	NYLON 6/6	BLACK	
	3	CONTACT PIN	COPPER ALLOY	GOLD OVER NICKEL	
_	4	FEMALE INSERT	NYLON 6/6	BLACK	
В	5	CONTACT SOCKET	COPPER ALLOY	GOLD OVER NICKEL	
	6	MALE COUPLING NUT	ZINC DIE CAST	BLACK E-COATED	
	7	FEMALE COUPLING NUT	ZINC DIE CAST	BLACK E-COATED	
	8	OVERMOLD	TPC	GRAY	
	9	O-RING	NITRILE	RED	

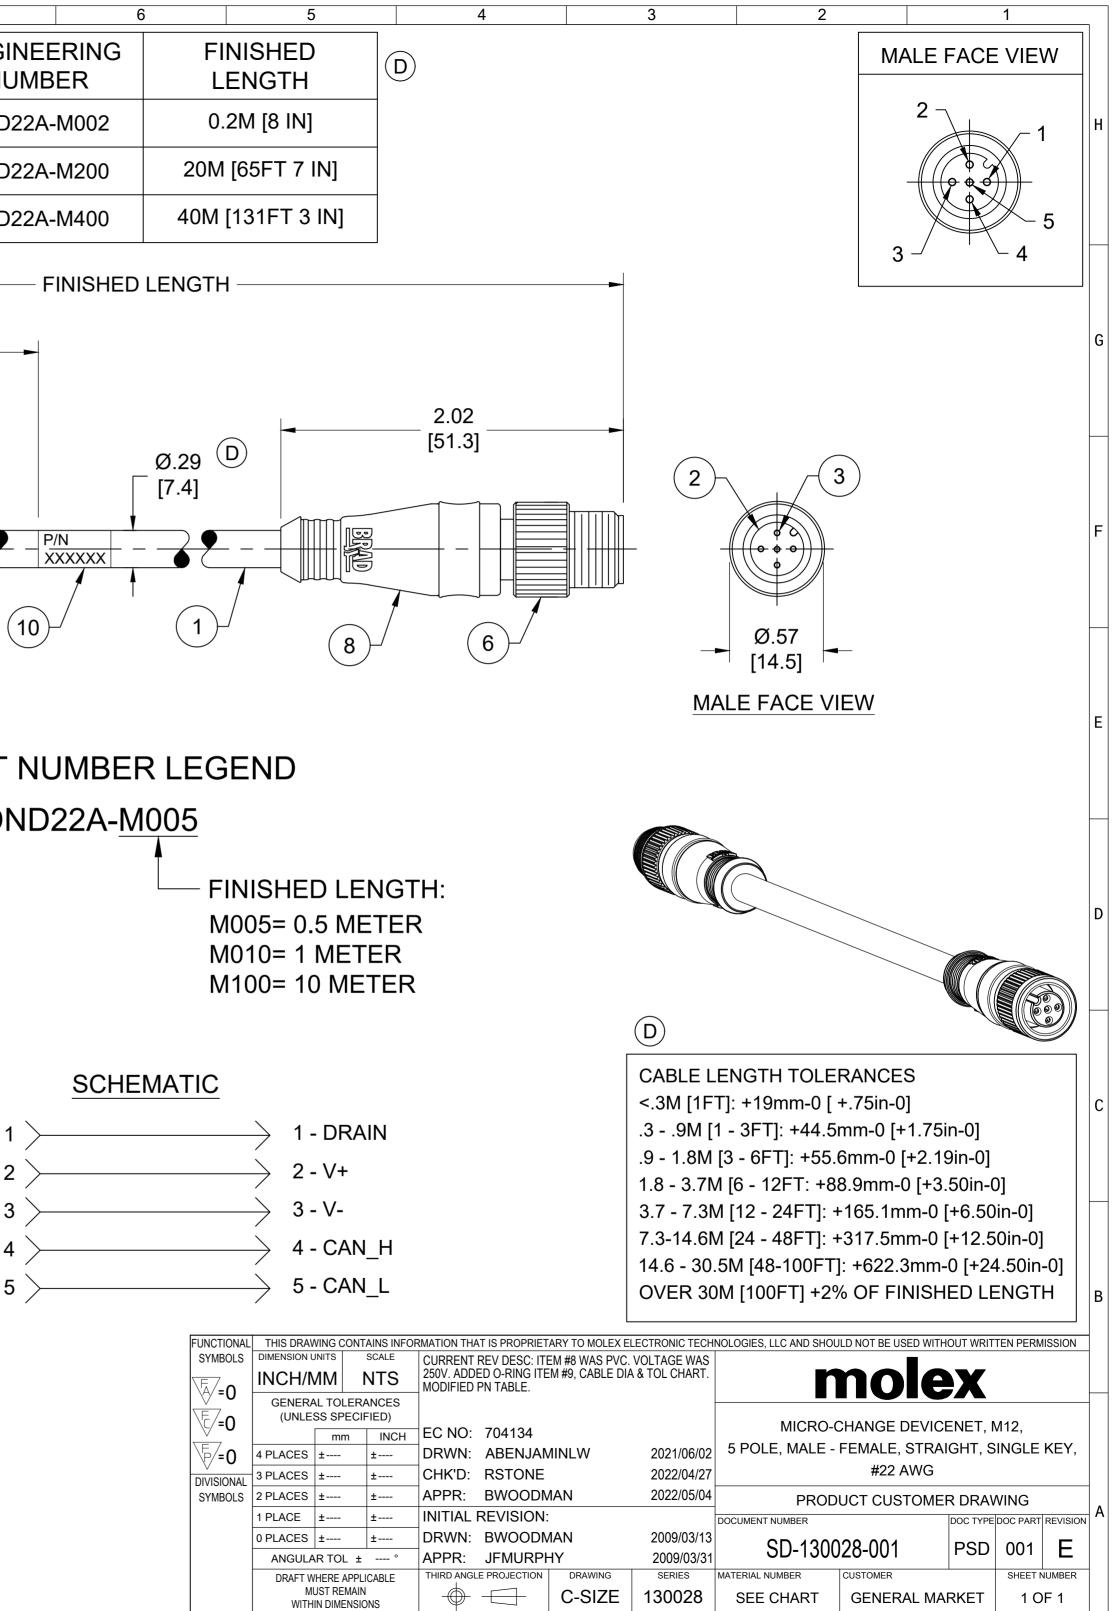

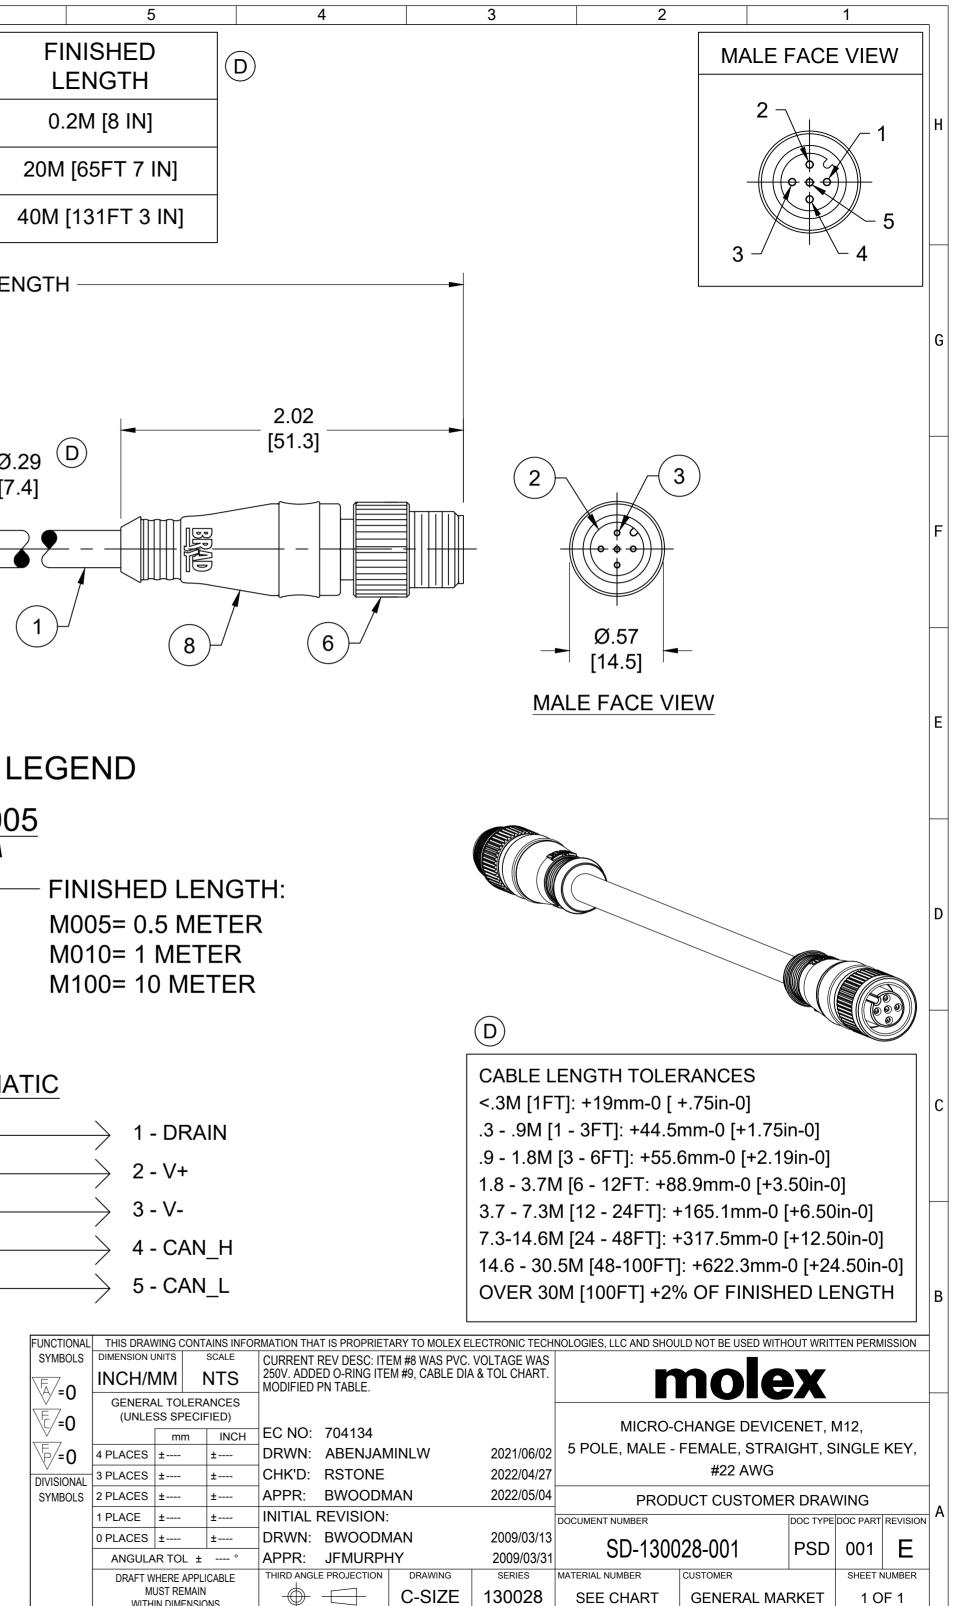

DOCUMENT STATUS | P1 RELEASE DATE 2022/05/04 21:13:42