

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0026481133](#)
Status: **Active**
Overview: [KK® Interconnect System - Molex](#)
Description: KK 396 PCB Breakaway Header, Vertical, Polarizing Wall, 13 Circuits, Tin (Sn) Plating
Replacement Part Number: <http://www.molex.com/molex/products/listview.jsp?channel=Products&sType=p&query=002648113526-48-1135> see comments

Documents:

[3D Model](#) [Product Specification PS-08-50-001 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification


CSA LR19980
 UL E29179

General

Product Family PCB Headers
 Series [41681](#)
 Application Power, Wire-to-Board
 Application Tooling Part Link [11-20-0901](#)
 Comments Original part has polarizing backwall, replacement has friction lock backwall, same dimensions and plating
 Overview [KK® Interconnect System - Molex](#)
 Product Name KK 396
 Replacement Part Number [26-48-1135](#) see comments
 UPC 800754385589

Physical

Breakaway Yes
 Circuits (Loaded) 13
 Circuits (maximum) 13
 Color - Resin Black
 Durability (mating cycles max) 25
 Flammability 94V-0
 Glow-Wire Capable No
 Lock to Mating Part None
 Material - Metal Brass
 Material - Plating Mating Tin
 Material - Plating Termination Tin
 Material - Resin Polyester
 Net Weight 6.524/g
 Number of Rows 1
 Orientation Vertical
 PC Tail Length 4.37mm
 PCB Locator No
 PCB Retention None
 PCB Thickness - Recommended 1.60mm
 Packaging Type Bag
 Pitch - Mating Interface 3.96mm
 Pitch - Termination Interface 3.96mm
 Plating min - Mating 5.080µm
 Plating min - Termination 5.080µm
 Polarized to Mating Part No
 Polarized to PCB No
 Shrouded No
 Stackable No
 Temperature Range - Operating See Product Specification

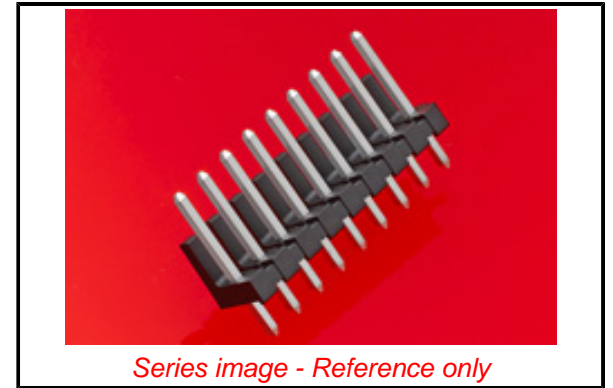

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
 ED/61/2018 (27 June
 2018)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[41681](#) Series

Mates With

[2139](#) KK Crimp Housing, [41695](#) KK Crimp Housing, [6442](#) KK Crimp Housing, [2145](#) PCB Connector, [41815](#) PCB Connector, [3069](#) KK Crimp Housing

Termination Interface: Style Through Hole

Electrical

Current - Maximum per Contact 7.0A
Voltage - Maximum 250V

Solder Process Data

Duration at Max. Process Temperature (seconds) 005
Lead-free Process Capability WAVE
Max. Cycles at Max. Process Temperature 001
Process Temperature max. C 235

Material Info

Engineering Number A41681A13A197

Reference - Drawing Numbers

Product Specification PS-08-50-001
Sales Drawing SD-41681-001, SD-41681-001-002

This document was generated on 09/19/2018

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION