

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0781202407](#)
Status: **Active**
Overview: Slim-Grid Board-to-Board Connectors
Description: Slim-Grid Receptacle, 24 Circuits, Surface Mount, Vertical, 0.05µm Gold (Au) Plated, Tube, Lead-Free

Documents:

Drawing (PDF)	Datasheet (PDF)
Product Specification 781200001-000 (PDF)	RoHS Certificate of Compliance (PDF)
Packaging Specification 781200001-000 (PDF)	

Agency Certification


CSA	LR19980
UL	E29179

General

Product Family	PCB Receptacles
Series	78120
Application	Board-to-Board, Signal
Comments	4.3 Amps per Pole with only 1 contact powered up; 1.4 Amps per Pole with max contacts powered up
Component Type	PCB Receptacle
Overview	Slim-Grid Board-to-Board Connectors
Product Name	Slim-Grid
Taxonomy	Board-to-Board Connectors
UPC	889056865159

Physical

Circuits (Loaded)	24
Circuits (maximum)	24
Color - Resin	Black
Durability (mating cycles max)	500
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	Yes
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Copper Alloy
Material - Plating Mating	Gold
Material - Plating Termination	Matte Tin
Material - Resin	Liquid Crystal Polymer
Net Weight	0.331/g
Number of Rows	2
Orientation	Vertical
PCB Locator	No
PCB Retention	None
Packaging Type	Tube
Pitch - Mating Interface	1.27mm
Pitch - Termination Interface	1.27mm
Plating min - Mating	0.051µm
Plating min - Termination	2.540µm
Polarized to Mating Part	No
Polarized to PCB	No
Temperature Range - Operating	-55° to +105°C
Termination Interface: Style	Surface Mount
Unmated Height	4.51mm

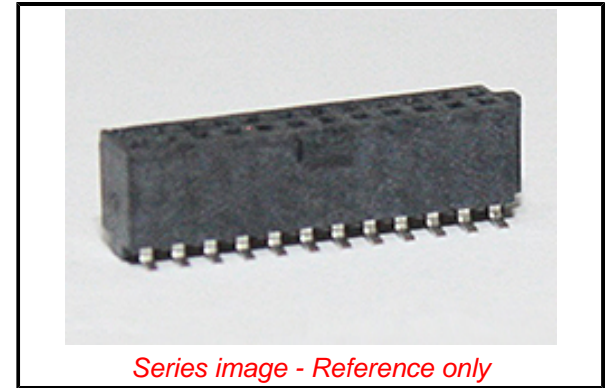

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2022)4187-DC (10
June 2022)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[78120 Series](#)

Mates With

Slim-Grid Headers [87933](#) , [200989](#) , [201021](#) , [201022](#) , [201173](#)

Electrical

Current - Maximum per Contact

1.4A

Voltage - Maximum

125V AC

Material Info**Reference - Drawing Numbers**

Packaging Specification

781200001-000

Product Specification

781200001-000

Sales Drawing

781200001-000

This document was generated on 02/27/2023

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION