

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [1713209032](#)  
**Status:** **Active**  
**Overview:** [Impel and Impel Plus Backplane Solutions](#)  
**Description:** Impel 90 Ohm, 4 Pair Right-Angle Daughtercard, 1.90mm Pitch, Right Guided, 2 Columns, 16 Circuits, Plated Through Hole Dimension 0.36mm

**Documents:**

<a href="#">3D Model</a>	<a href="#">Application Specification AS-171320-990-001 (PDF)</a>
<a href="#">3D Model (PDF)</a>	<a href="#">Application Specification AS-171320-991-001 (PDF)</a>
<a href="#">Drawing (PDF)</a>	<a href="#">Application Specification AS-171320-992-001 (PDF)</a>
<a href="#">Product Specification PS-171320-999-001 (PDF)</a>	<a href="#">Packaging Specification PK-78888-085-001 (PDF)</a>
<a href="#">Product Specification PS-45499-002-001 (PDF)</a>	<a href="#">RoHS Certificate of Compliance (PDF)</a>
<a href="#">Application Specification 1713209994-AS-000 (PDF)</a>	

**General**


Product Family	Backplane Connectors
Series	<a href="#">171320</a>
Application	Coplanar, Daughtercard
Component Type	PCB Receptacle
Data Rate	40.0 Gbps
Overview	<a href="#">Impel and Impel Plus Backplane Solutions</a>
Product Name	Impel
Taxonomy	Backplane Connectors
UPC	191128235341

**Physical**

Circuits (Loaded)	16
Circuits (maximum)	16
Color - Resin	Black
Durability (mating cycles max)	200
First Mate / Last Break	No
Guide to Mating Part	Yes
Keying to Mating Part	None
Material - Metal	High Performance Alloy (HPA)
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	13.182/g
Number of Columns	2
Number of Pairs	4
Number of Rows	8
Orientation	Right Angle
PC Tail Length	1.30mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.00mm
Packaging Type	Tray
Pitch - Mating Interface	1.90mm
Pitch - Termination Interface	1.90mm
Plating min - Mating	0.762µm
Temperature Range - Operating	-55° to +85°C

**Electrical**

Current - Maximum per Contact	0.75A
Impedance	90Ω
Shield Type	Full Shield
Voltage - Maximum	29.9V AC (RMS)/DC

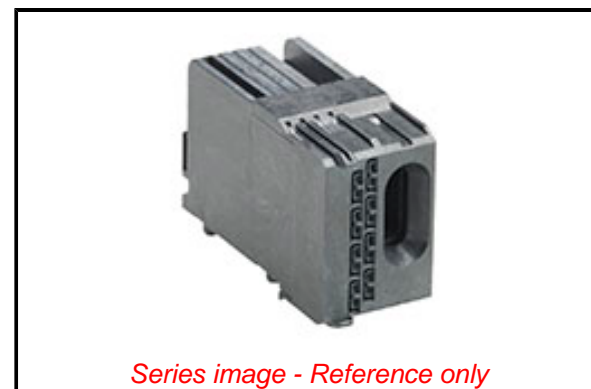

*Series image - Reference only*

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
D(2022)4187-DC (10  
June 2022)

**Halogen-Free**

**Status**

**Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[171320 Series](#)

**Mates With**

Impel Cable

**Solder Process Data**

Lead-free Process Capability

N/A

**Material Info****Reference - Drawing Numbers**

Application Specification

1713209994-AS-000, AS-171320-990-001,  
AS-171320-991-001, AS-171320-992-001

Electrical Model Document

1713201218-000, 1713202061REVA-000

Packaging Specification

PK-78888-085-001

Product Specification

PS-171320-999-001, PS-45499-002-001

S-Parameter Model

1713201218-000, 1713202061-000

Sales Drawing

1713209001-000

This document was generated on 02/27/2023

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**