



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
02/17/17	B	UPDATED TITLE	T.B.	B.S.	
03/24/17	C	UPDATED CONTACTS SPEC.	T.B.	B.S.	
12/12/19	D	ADDED WEIGHT OF THE PART	T.B.	B.S.	

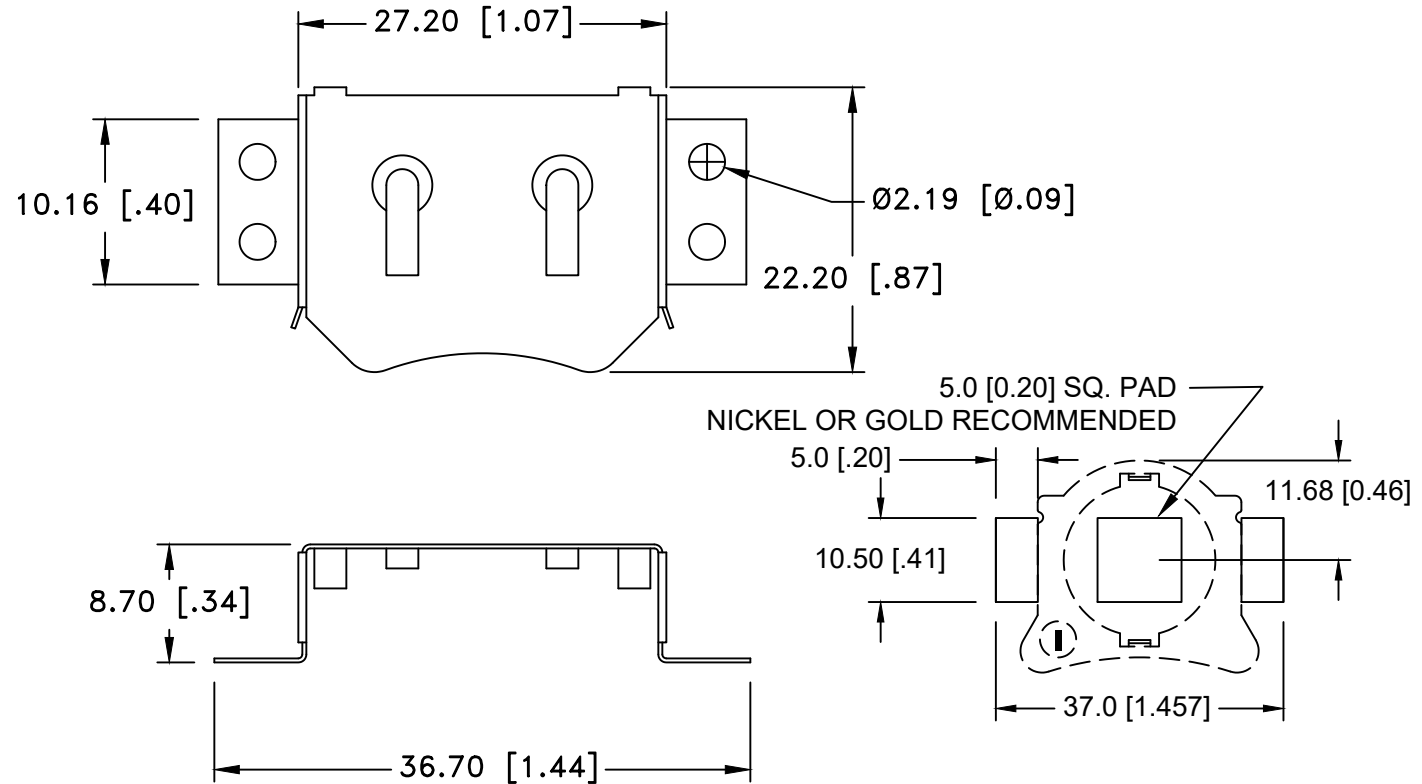

PCB LAYOUT

SPECIFICATIONS:

- \* Contacts : Phosphor Bronze C5191, Nickel Plated
- \* Vibration test: 10-50-10 hz swept in 60 seconds  
x,y,z direction: 1 hour each direction
- \* Result: no dislodgement of the cell or damage  
no discontinuity over 10 micro-seconds
- \* Shock test: half sine wave acceleration 150g.  
6 milli-seconds 3 shock pulses each direction per axis,  
total of 18 pulses
- \* Result: no evidence of physical damage
- \* Approximate weight: 1.83g
- \* ROHS COMPLIANT

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735		
	decimal ±.5 (.020)	Scale	Drawn By B.S. Approved By T.B.
Fractional ± .8 (.030)	Title CR2477 SURFACE MOUNT BATTERY RETAINER		
Angular ± 3°	Date 12/12/19	Drawing Number BRX1-2477-SM	