
6/28/2020

Ø.046 FOR -LC OPTION (NPTH TYP) → .156[3.96] CONNECTOR OUTLINE Ø.043 FOR -A OPTION (NPTH TYP) .085[2.16]-.135 [3.43] .200 [5.08] .315 [8.00] -.088[2.24] .156[3.96] REF-((NO OF POS -2) x .156[3.96]) ((NO OF POS -1) x .156[3.96]) (No OF POS x .156[3.96]) REF

FIG 1

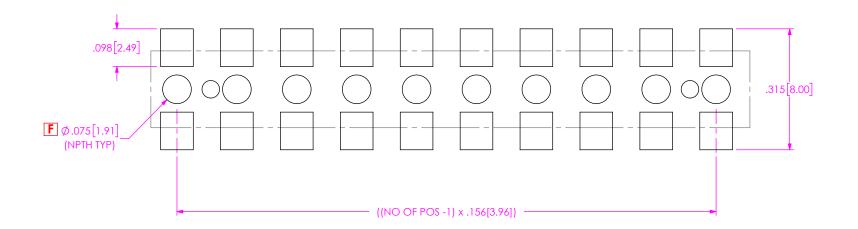

 $\frac{\text{FIG 2}}{\text{(DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG 1)}}$

REVISION F

RECOMMENDED STENCIL LAYOUT FOR FHP-SM (SINGLE)

NOTE: STENCIL TO BE .006[0.15] THICK.

OPTION	"A"
FHP-SM (SINGLE)	.135[3.43]
FHP-SM (SINGLE) - PASS THROUGH OPTION	.098[2.49]

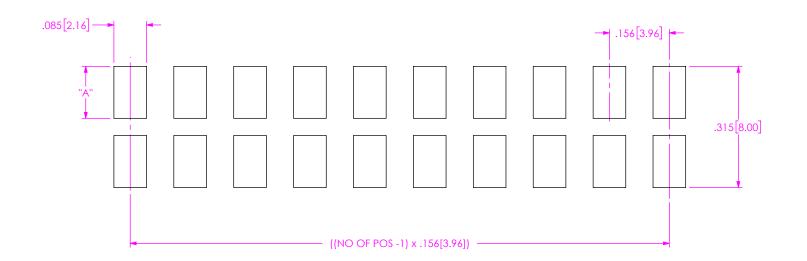


FIG 3

