
THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

			BAF	RREL					PANDUIT	ALTERNATE INDUSTRY
PANDUIT PART NUMBER	COPPER CONDUCTOR SIZE	EXPANDED WIRE RANGE***	I.D. +/01	0.D. +/01	OVERALL LENGTH "A" +/12	WIRE STRIP LENGTH	PLATING	PANDUIT COLOR CODE ON BARREL	DIE INDEX NUMBER ON BARREL	DIE INDEX NUMBER ON BARREL
SCS300-X	300 kcmil	#2/0 - 300 kcmil	0.65	0.81	2.25	1-1/16	ELECTRO-TIN	WHITE	P66	(17)
SCS300UT-X	1						N/A	N/A	N/A	N/A
SCS350-X							ELECTRO-TIN	RED	P71	(18)
SCS350UT-X	350 kcmil	#3/0 - 350 kcmil	0.70	0.87	2.37	1-1/8	N/A	N/A	N/A	N/A
SCS400-6							ELECTRO-TIN	BLUE	P76	(19)
SCS400UT-6	400 kcmil	#4/0 - 400 kcmil	0.76	0.95	2.50	1-3/16	N/A	N/A	N/A	N/A
SCS500-6		#4/0 - 500 kcmil	0.83	1.05	2.87	1-3/8	ELECTRO-TIN	BROWN	P87	(20)
SCS500UT-6	500 kcmil						N/A	N/A	N/A	N/A
SCS600-6							ELECTRO-TIN	GREEN	P94	(22)
SCS600UT-6	600 kcmil	250 - 600 kcmil	0.92	1.18	2.87	1-3/8	N/A	N/A	N/A	N/A
SCS750-6							ELECTRO-TIN	BLACK	P106	(24)
SCS750UT-6	750 kcmil	500 - 750 kcmil	1.03	1.29	3.37	1-5/8	N/A	N/A	N/A	N/A
SCS800-6	800 kcmiL		1.05	1.35	3.37	1-7/8	ELECTRO-TIN	ORANGE	P107	(25)
SCS1000-3							ELECTRO-TIN	WHITE	P125	(27)
SCS1000UT-3	1000 kcmil		1.17	1.50	3.87	1-7/8	N/A	N/A	N/A	N/A



	_				-	
09	7/18	JHNU	JHNU	RGB	REVISED UP PART SUFFIX TO UT REVISED NOTES TO SPECIFY SCS800-6 IS NOT UL LISTED/CSA CERTIFIED REVISED TITLE BLOCK	N41135BB- C41135
RE∖	DATE	BY	СНК	APR	DESCRIPTION	ECN

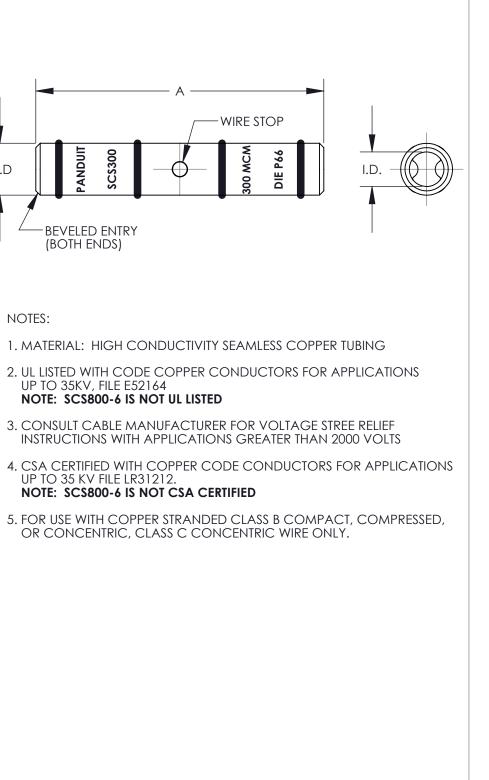

TITLE

	SCS STANDARD BARREL 300 kcmil - 1000 kcmil COPPER SPLICES							
CUSTOMER DRAWING								
	ITEM REVISION NAME	N41135BB/09						
	DATASET FILE NAME	C41135/09.SLDDRW						
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]								
	.X ± .XX ±	.XXX ± ANGLES ±	SEE NOTES					
		THIRD ANGLE PROJECTION	drawing number C41135					
	PWS DATE 3/93	GRM N/A	SHEET 1 OF 1					