
THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

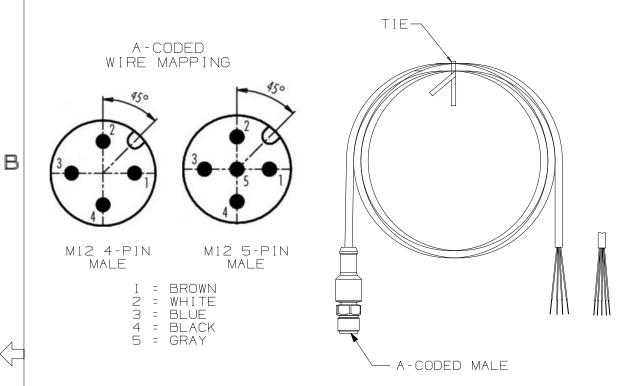

NOTES:

- 1. SEE CURRENT CATALOG FOR ADDITIONAL PRODUCT DETAILS.
- 2. 22 AWG CONDUCTORS.
- 3. PUR SHEATH & HOUSING BODY
- 4. UNSHIELDED
- 5. SCREW CONNECTOR LOCKING SYSTEM
- 6. AVAILABLE IN 2M, 5M, 10M LENGTH.

PART NUMBER	END 1	END 2		
ICA4T15P2BL*M	4 PIN - MALE	UNTERMINATED		
ICA5T15P2BL*M	5 PIN - MALE	UNTERMINATED		

Δ								INDUSTRIALNET, M12 A-CODED, 4 OR 5 PIN					
								STRAIGHT TO UN-TE					-
								CUSTOMER DRA			WING	_	
Ī								00423NBP/00 DATASET FILE NAME 00423NBP_DC/00A			PANDUIT		
								UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		MATERIAL:			
								.× ±		.XXX ±		BLACK PUR SHEATH & BODY	
20											DD 11101 E	DRAWING NUMBER:	\dashv
- }	00A	5/28/19	JB0	MW	EOS	INITIAL RELEASE	ECN-INI-0014	ļ ţ			RD ANGLE DJECTION	00423NBP	
0101000	REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	JBO	5/28/19	CHK MW	NONE	SHT 1 0F 1	
										_	1		