
I	۵	н т	m	0





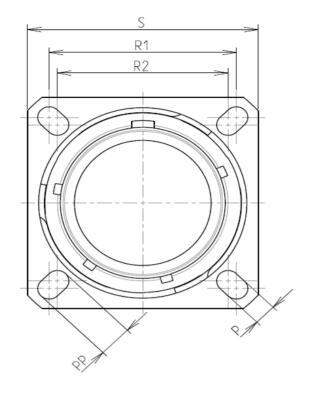

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 11

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Aluminium : Nickel -Shell Plating -Insulator : Thermoplastic -Contacts : Copper Alloy : Silicon Elastomer -Seals & Grommet -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +200°C -Temperature Range -Salt Spray : 48 hours -Mass : 12.01 g ± 10%

8D 0

G

11

F

01

А

F

С

	dimension		
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M15x1-6g		


ORIENTATION : C

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 11-01

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

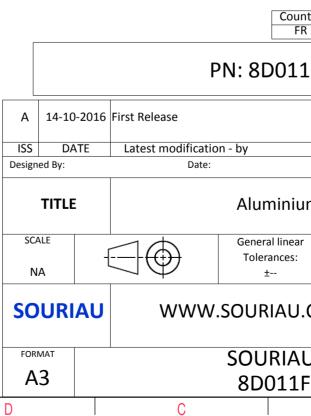

σ		Þ				
			4			
AS EXAMPLE			3			
any non-conformit which does not co or of the Parties or b ndation, technical no untry Jurisd R 1F01AC	mply with by a third party		2			
		MOD N°	-			
	CUSTOMER DRAV					
um Receptacle 8D series						
ar i	NPRDS / PROJECT 859					
J.COM	communicated without permission					
U DRG N° F01AC-C		SHEET				
.FUIAC-C		A	J			
U	I					

		۵	п	m		0
		Contact Layout				Panel Cutou
4		01			A	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Ctc	1#12 11-01 X Y	-		<u>∞</u> –	ØT
ယ	A	0 0				Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products wh the Specifications issued by either of
22						(professional recommendat Countring FR PN: 8D011F
	-				A 14-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:
-					SCALE NA	Aluminium General linear Tolerances: ±
					FORMAT A3	SOURIAU 8D011F0
	Н	G	F F	E	D	C

