Ŧ	۵	п –	m	0







LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 11

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Aluminium	
	-Shell Plating	: Nickel	
	-Insulator	: Thermoplastic	
	-Contacts	: Copper Alloy	
	-Seals & Grommet	: Silicon Elastomer	
\sim	-Contact Plating	: Gold over copper Alloy 0.8μm minimum	
	-Durability	: 500 Mating cycles	VV
	-Delivered with Souria	u contacts and Accessories	
	-Temperature Range	- 65°C to +200°C	
	-Salt Spray	: 48 hours	
	-Mass	: 14.95 g ± 10%	

8D 0

G

11

F

01

В

F

С

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M15x1-6g		

ORIENTATION : C


D

CONTACT LAYOUT : 11-01

CONTACT TYPE : SOCKET(500 Matings)

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

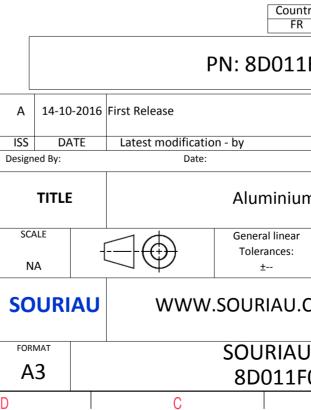

Φ		A				
	0			4		
AS EXAMPLE				3		
	mply with by a third part otice.) liction & Cont					
IF01BC	Not Listed			2		
			MOD N°			
um Receptac	m Receptacle 8D series					
ar		PROJECT		1		
J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission						
U DRG N°						
F01BC-C		A	1/2	J		

r	τ	۵	<u>п</u>	m		0
		Contact Layout				Panel Cuto
4		01			ħ	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Ctc	1#12 11-01 X Y]		₩ ₩	ØT
ى	A	0 0				Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for ar due to a use of the Products w the Specifications issued by either o (professional recommenda
N						Count FR
					ISS DATE	PN: 8D011 16 First Release Latest modification - by
					Designed By: TITLE SCALE	Date: Aluminiur General linear
<u> </u>					NA SOURIA	Tolerances:
					FORMAT A3	SOURIAL 8D011F
	Н	G	F	E	D	C

