
—	۵	П	m	D	0







Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 15

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium				
-Shell Plating	: Olive drab Cadmium				
-Insulator	: Thermoplastic				
-Contacts	: Copper Alloy				
-Seals & Grommet	: Silicon Elastomer				
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum				
-Durability	: 500 Mating cycles				
-Delivered with Souriau contacts and Accessories					
-Temperature Range	: -65°C to +175°C				
-Salt Spray	: 500 hours				

: 27.06 g ± 10%

8D 0

G

15

W

97


S

F

В

Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
PP	4.39±0.2			
R1	24.61			
R2	23.01			
S	31±0.3			
V	20.83+0/-1.25			
W	2.1/2.5			
Z	31.5 Max			
VV THREAD	M22x1-6g			

Е

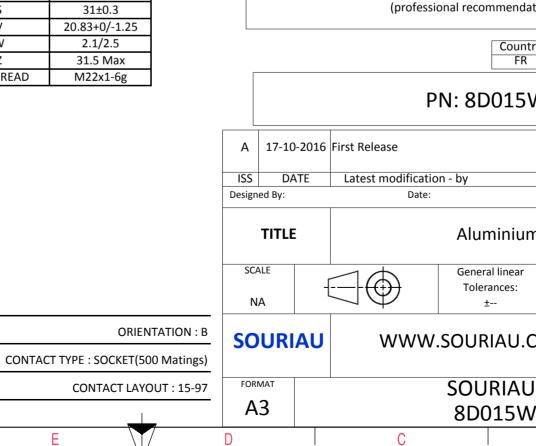

D

0		Ξ		A		1
						4
LAY	OUT SHOWN AS EXA	MPLE				3
SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) $\frac{Country \qquad Jurisdiction \& Control List \\ \hline FR \qquad Not Listed}$ PN: 8D015W97SB						2
irst Release]	
Latest modificatio Date:	n - by		CUSTO	MER DRAWING	MOD N°	
Aluminium Receptacle 8D series						
$\exists \bigoplus$	General linear Tolerances: ±			os / PROJECT 859	aastu -f	1
WWW.SOURIAU.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission						
SOURIAU DRG N° 8D015W97SB-C					SHEET	
С	012/08	B		A	1/2	J

	T	G	וד	m		0
		Contact Layout				Panel Cutor
4		$\begin{array}{c} & & & & \\ & & & & \\ & & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & & \\ & & & & \\ & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & &$			Ā	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Contact position ID Locat (mm) A +.065 (1.65) B +.178 (4.52) C +.230 (5.84) D +.178 (4.52) E +.065 (1.65) F 089 (2.26)	Y-axis position X-axis Y-axis (mm) ID (mm) (mm) (mm) +.234 (5.94) G 207 (5.26) 095 (2.41) +.178 (4.52) H 234 (5.94) +.065 (1.65) 023 (0.58) J 178 (4.52) +.178 (4.52) 178 (4.52) K 065 (1.65) +.234 (5.94) 234 (5.94) L 047 (1.19) +.081 (2.06) 235 (5.97) M +.047 (1.19) 081 (2.06)			<u>ح</u>	
ω	Shell Arrangement Nu size no. cc 15 -97	Imber of Size Service Contact Supersedes ontacts contacts rating location 4 16 C.G.L.M All others MS20052-97	_			Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for an
N						due to a use of the Products wh the Specifications issued by either o (professional recommendat Countr FR
						PN: 8D015V
					ISS DATE Designed By:	Latest modification - by Date:
<u> </u>					SCALE NA	General linear Tolerances:
					FORMAT	SOURIAU
	Н	G	F	E	A3	8D015W

