
I I I I I I I I I I I I I I I I I I I	Ω	I II I	m	O





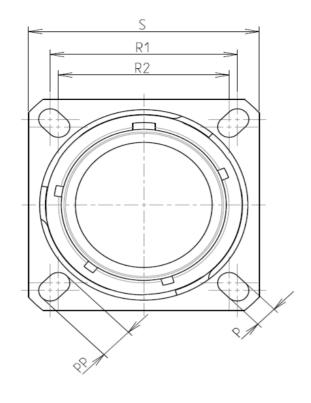

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 21

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium		
-Shell Plating	: Olive drab Cadmium		
-Insulator	: Thermoplastic		
-Contacts	: Copper Alloy		
-Seals & Grommet	: Silicon Elastomer		
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum		
-Durability	: 500 Mating cycles		
-Delivered with Souriau contacts and Accessories			
-Temperature Range	- 65℃ to +175℃		
-Salt Spray	: 500 hours		

: 39.31 g ± 10%

8D 0

G

21

W

11

Α

F

В

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
РР	4.93±0.2		
R1	31.75		
R2	29.36		
S	39.7±0.3		
V	20.07+0/-1.25		
W	2.1/3.2		
Z	31.5 Max		
VV THREAD	M31x1-6g		

ORIENTATION : B

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 21-11

SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend Cour



Φ					
			4		
S EXAMPLE			3		
any non-conformit which does not co or of the Parties or b dation, technical no intry Jurisd R 1W11AB	mply with by a third party		2		
	CUSTOMER DRAWING	MOD N°			
m Receptacle 8D series					
ar	NPRDS / PROJECT 859				
COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
U DRG N°					
W11AB-C	A	1/2	J		
-					

	工	۵	п –	m	D	0
		Contact Layout				Panel Cutout
4	-x ($ \begin{array}{c} $			· · · · · · · · · · · · · · · · · · ·	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	B +:306 (7.77) C +:348 (8.84) D +:227 (5.77) E +:000 (0.00) F -:227 (5.77) Shell Arrangement no. Nu	Contacts (Insert arrangement 21-11) on Contact Y-axis Location (mm) ID (mm) (mm) +332 (8.43) G -348 (8.84) -061 (1.55) +177 (4.50) H -306 (7.77) +177 (4.50) -061 (1.55) J -121 (3.07) +332 (8.43) -270 (6.86) K +000 (0.00) +123 (3.12) -353 (8.97) L +.000 (0.00) -115 (2.92) -270 (6.86) mber of ntacts Size contacts Service rating Contact location Supersed 11 12 I All MS2055-	5		Ξ	
ယ						Dim ØA ØAA R1 ØT
	-					
						SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of (professional recommendati
N						Country FR
						PN: 8D021W
					A 02-11	-2016 First Release
					ISS DA Designed By:	TE Latest modification - by Date:
					TITLE	Aluminium
<u> </u>					SCALE NA	General linear Tolerances: ±
					SOURI	AU WWW.SOURIAU.C
				_	FORMAT A3	SOURIAU 8D021W2
	Н	G	F	E	D	C

